


微型带凸缘深沟球轴承

双面带防尘盖式

标准型

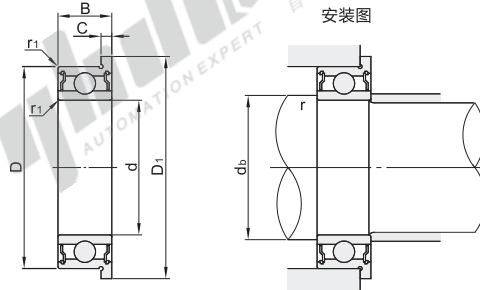

安装图

- ① 经济型适合中低转速、低载荷。
- ② 不承诺品牌。
- ③ 基本额定负载/极限转速/重量值不适用于SUS440C材质。



型号		d	D	B	D ₁	C	r ₁ (min)	基本额定负载(N)		极限转速 rpm (参考)	安装尺寸		重量 (g) (参考)	
代码	轴承型号							Cr(动)	Cor(静)		d _b (min)	r (max)		
	BAL....-E BAL													BAL....-E-SUS BAL....-SUS
BAL BAL....-SUS	682ZZ	2	5	2.3	6.1	0.6	0.08	135	40	68000	2.7	0.08	0.23	
	692ZZ	2.5	6	3	7.5	0.8	0.15	264	79	60000	3	0.15	0.44	
	682AZZ			2.6	7.1		0.08	167	59	56000	3.7	0.08	0.41	
	692AZZ			7	3.5	8.5	0.9	0.15	308	103	50000	3.85	0.15	0.67
	673ZZ		6	2.5	7.2	0.6	0.08	193	75	56000	3.6	0.08	0.25	
	683ZZ		7	3	8.1	0.8	0.1	312	104	50400	3.9	0.1	0.52	
	693ZZ	3	8	4	9.5	0.9		448	144	48000			0.71	
	603ZZ		9	5	10.5		0.15	456	151	44000	4.2	0.15	1.6	
	623ZZ		10	4	11.5	1		512	179	40000			1.79	
	674ZZ	4	7	2.5	8.2	0.6	0.08	177	70	48000	4.6	0.08	0.34	
	684ZZ			9		10.3		512	179	42000	5	0.1	1.13	
	694ZZ			11	4	12.5		572	220		5.2	0.15	2	
	604ZZ			12		13.5	1		765	280	38000			2.56
	624ZZ			13	5	15		0.2	1048	392	32000	5.6	0.2	3.49
	675ZZ		8	2.5	9.2	0.6	0.08	173	72	42000		0.08	0.39	
	685ZZ		11	5	12.5		0.15	572	225	36000	6.2	0.15	2.17	
	695ZZ	5	13	4	15			864	344	34000			2.69	
	605ZZ		14		16	1	0.2	1064	404	32000			3.89	
	625ZZ		16	5	18		0.3	1383	540	28000	7.7	0.3	5.51	
	676ZZ		10	3	11.2	0.6	0.1	372	156	36000	6.6	0.1	0.73	
	686ZZ	6	13	5	15	1.1	0.15	864	352		7	0.15	3.03	
	696ZZ			15		17		0.2	1080	424	32000	7.6	0.2	4.29
	606ZZ			17		19	1.2		1752	692	30000			6.49
	626ZZ		19	6	22	1.5	0.3	1868	716	25000	8	0.3	9.77	
	678ZZ	8	12	3.5	13.6	0.8	0.1	412	201	32000	8.8	0.1	0.85	
	688ZZ			16	5	18	1.1	0.2	1288	572		9.6	0.2	4.46
	698ZZ			19	6	22			1592	692	28000			8.39
	608ZZ			22	7	25	1.5	0.3	2680	1120	27000	10	0.3	13
	6700ZZ		15	4	16.5	0.8	0.15	684	348	12000	10.3	0.15	2.09	
	6800ZZ	10	19	5	21	1		1372	672	29000	12		6.09	
	6900ZZ		22	6	25	1.5	0.3	2156	1018	27200	13.2	0.3	11.09	
	6701ZZ		18	4	19.5	0.8	0.2	740	424	10000	12.4	0.2	3.39	
	6801ZZ	12	21	5	23	1.1		1532	832	26000			7.09	
	6901ZZ		24	6	26.5	1.5	0.3	2308	1172	24000	14	0.3	13.19	
	6702ZZ		21	4	22.5	0.8	0.2	749	465	8800	15.4	0.2	3.89	
	6802ZZ	15	24	5	26	1.1		1658	1002	22000			8.29	
	6902ZZ		28	7	30.5	1.5	0.3	3456	1807	20000	17	0.3	19.89	
	6703ZZ		23	4	24.5	0.8	0.2	800	526	7600	17.4	0.2	4.39	
	6803ZZ	17	26	5	28	1.1		1786	1164	20000			8.89	
	6903ZZ		30	7	32.5	1.5	0.3	3670	2052	18000	19	0.3	21.39	
	6704ZZ		27	4	28.5	0.8	0.2	832	583	6800	20.4	0.2	6.29	
	6804ZZ	20	32	7	35	1.5		3212	1969	16000			19.79	
	6904ZZ*		37	9		2		51048	2945	15000	22		42.79	
	6805ZZ	25	7		40	1.5	0.3	3442	2345	14000		0.3	26.09	
	6905ZZ			42	9	45	2		5600	3632	12000	27		50.19

① 带*规格仅适用SUJ2材质。

① 1Kg=9.81N



型号		d	D
代码	轴承型号		
BAL....-E	682ZZ	2	5
BAL	692ZZ		6

BAL682ZZ



优惠价	
数量	1~9 10~
价格	100% 另行报价

交货期	
	5