



下模架用钢球导套 下模架用钢球导套用弹簧

◀ LOCTITE粘接型
◀ OFT11专用弹簧

下模架用钢球导套

代码	类型	材质		硬度		
		导套	挡圈	导套	挡圈	
OFT11	LOCTITE粘接型	GCr15	SUJ2	弹簧钢	58HRC~	44~52HRC

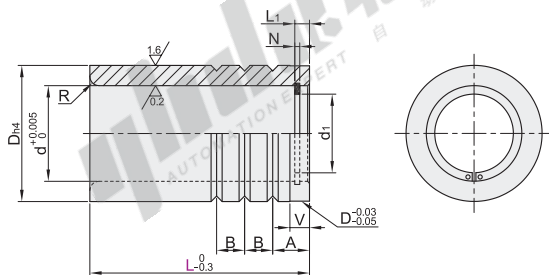

视角标准：第一视角

代码	型号	适用导柱直径	L	d	d1	V	A	B	L1	N	R	Dh4
OFT11	20	20	50	26	21.4	4	10	6	4	1.35	2.5	37
	22	22	50 60	28	23							40
	25	25	60 80	31	26							45
	28	28	60 80	36	30					1.65		50
	32	32	80 100	40	33.2	5	12	7	4.5		3	55
	38	38	80 100	48	40					1.9		64
	45	45	100 120	55	46.8							74
	50	50	100 120	60	51.3	6	15	10	5	2.2	3.5	83
	60	60	100 120	70	61				6	2.7		95
												0 -0.007



请按图示订货 OFT11 — 20 — L50

代码	型号	适用导柱直径	L
OFT11	20	20	50
	22	22	60 60



未税价(元)



数量	1~9	10~
价格	100%	另行报价



交货期
12

下模架用钢球导套用弹簧

代码	类型	材质
OFQ25	OFT11专用弹簧	SWP-B

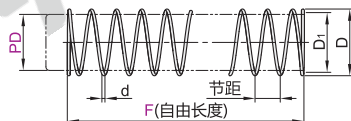

视角标准：第一视角

代码	型号	PD	F	d	节距	D	D1
OFQ25	20	20	25~40	0.9	12	25	23.2
	22	22	25~50	1		27	25
	25	25	25~60	1.1	13	30	27.8
	28	28		1.2	15	35	32.6
	32	32	35~70	1.5		39	36
	38	38		1.8	18	47	43.4
	45	45		2		54	50
	50	50	45~80	2.3	20	59	54.4
	60	60		2.6		69	63.8

弹簧压紧长度表

PD	25	30	35	40	45	50	55	60	65	70	75	80
20	3.7	4	4.4	4.8	—	—	—	—	—	—	—	—
22	4.1	4.5	4.9	5.3	5.7	6.2	—	—	—	—	—	—
25	4.3	4.7	5.2	5.6	5.9	6.4	6.8	7.3	—	—	—	—
28	4.4	4.8	5.2	5.6	6	6.4	6.8	7.2	—	—	—	—
32	—	—	6.4	7	7.5	8	8.5	9.5	9.4	10	—	—
38	—	—	7	7.6	8	8.6	9	9.5	10	10.6	—	—
45	—	—	—	—	8.6	9	9.6	10	10.6	11	11.6	12
50	—	—	—	—	9.9	10.4	11	11.5	12.2	12.6	13.3	13.8
60	—	—	—	—	11.2	11.7	12.5	13	13.8	14.3	15.1	15.6



请按图示订货 OFQ25 — PD20 — F30

代码	型号	PD(适用导柱直径)	F
OFQ25	20	20	25~40
	22	22	



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期
9