


直通接头/端插直通头
双向插入型接头/塞子
变径

精密型 快插接头

直通接头


代码	类型	材质
J-XXP01	变径 直通接头	PBT

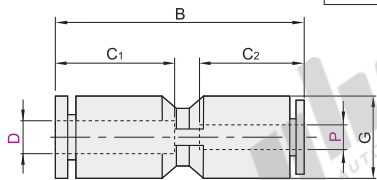

视角标准：第一视角

端插直通头

代码	类型	材质
J-XXP51	变径 端插直通头	PBT



视角标准：第一视角

型号	P	B	G	C1	C2	有效断面积 (mm²)	重量 (g)
代码	D						
J-XXP01	6	4	34.5	13	17	14.9	3.2
	4	4	39	14.5	18.4	17	4.1
	8	6	42.5	18.5	21.2	18.4	6.9
	10	8	43	21	23.4	20.35	7.1
	8	8	48			33.95	9.8
	12	10	48.5				10.5

型号	P	B	E	G	C	有效断面积 (mm²)	重量 (g)
代码	D						
J-XXP51	6	38.4	19	11	14.9	4.8	1.5
	4	35	21.5	13	17	11	1.8
	6	41.7	23.5	12.5	14.9	4.5	2.1
	4	42.2	23.5	12.9	17	11	2.3
	6	40.7	26.5	14.4	18.1	20.3	2.8
	8	46.1	26.5	12.9	17	10.5	6
	6	39.6	26.5	14.4	18.1	20.3	3
	8	43.3	26.5	18.1	20.2	33.9	5.4
	10	51.2	26.5				



型号	P
代码	D
J-XXP01	4
	6

J-XXP01-D8-P4



优惠价
数量 1~29 30~
价格 100% 另行报价

未税价(元)



交货期
1



型号	P
代码	D
J-XXP51	6
	8

J-XXP51-D4-P6



优惠价
数量 1~29 30~
价格 100% 另行报价



未税价(元)



交货期
1

双向插入型直通头



代码	类型	材质
J-XXP61	变径 双向插入型直通头	PBT



视角标准：第一视角

塞子

代码	类型	材质
J-XXP81	变径 塞子	PBT

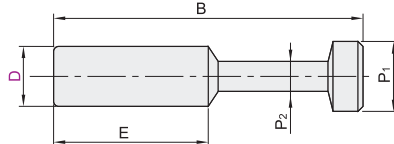

视角标准：第一视角

型号	P	B	有效断面积 (mm²)	重量 (g)
代码	D			
J-XXP61	6	4	39.5	0.5
	8	6	36.9	0.6
	10	8	38.1	0.8
	12	10	41.5	1.3
	16	12	43	1.5
	8	8	44.4	1.8
	10	10	48	2.4
	12	12	52.5	4.5
	16	16	53.5	3.5
			31.8	

型号	B	E	P1	P2	重量 (g)
代码	D				
J-XXP81	4	27.9	15	5	0.3
	6	32.6	16	7	0.7
	8	36.7	18	9	1.3
	10	42.3	20.5	11	2.1
	12	43.2	23	13	2.8
	16	49	24	17	5.3



型号	P
代码	D
J-XXP61	4
	6

J-XXP61-D8-P4



优惠价
数量 1~29 30~
价格 100% 另行报价

未税价(元)



交货期
1



型号	B
代码	D
J-XXP81	32.6
	36.7

J-XXP81-D6



优惠价
数量 1~29 30~
价格 100% 另行报价

未税价(元)



交货期
1

气调
速接
头类
D8