
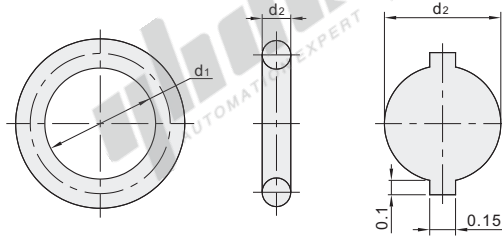


代码	类型	材质	硬度(肖氏)	颜色	使用温度范围	用途
XTH31	G系列	防静电丁腈橡胶	HS65 ^{±0}	黑色	-20~100°C	防静电用 (防静电值 10 ⁴ ~10 ⁶ Ω)
XTH32		防静电氟橡胶			-10~200°C	
XTH33		防静电硅橡胶			-40~200°C	



① 截面放大图

视角标准：第一视角

型号		公称 编号	d2	d1			配合尺寸		
代码	规格			尺寸	XTH31	XTH33	XTH32	d1	D
XTH31 XTH32 XTH33	25	G25	3.1 ^{±0.09}	24.4	±0.24	±0.37	±0.29	25	30
	30	G30		29.4	±0.28	±0.43	±0.34	30	35
	35	G35		34.4	±0.32	±0.49	±0.39	35	40
	40	G40		39.4	±0.36	±0.55	±0.44	40	45
	45	G45		44.4	±0.40	±0.61	±0.49	45	50
	50	G50		49.4	±0.44	±0.67	±0.53	50	55
	55	G55		54.4	±0.48	±0.73	±0.58	55	60
	60	G60		59.4	±0.52	±0.79	±0.63	60	65
	65	G65		64.4	±0.56	±0.85	±0.68	65	70
	70	G70		69.4	±0.60	±0.91	±0.73	70	75
	75	G75		74.4	±0.64	±0.97	±0.77	75	80
	80	G80		79.4	±0.68	±1.03	±0.82	80	85
	105	G105		104.4	±0.86		±0.86	105	110
	120	G120		119.4	±0.97		±0.97	120	125
	145	G145		144.4	±1.15		±1.15	145	150
	170	G170		169.3	±1.32		±1.32	170	180



请按图示订货

型号	公称 编号
XTH31	G25
XTH32	G30
XTH31—25	



● 优惠价

数量	1~9	10~
价格	100%	另行报价

未税价(元)



交货期

5

