


高品质 裸压着端子

圆形
RNB系列

代码	类型	材质	表面处理	焊接方式
ZKT21	裸压着端子 圆形	紫铜	镀锡	接缝焊银

特点

- 电解铜镀锡，导电性良好；
- 无缝焊接使导体和端子间具有良好的接触性和拉伸强度。

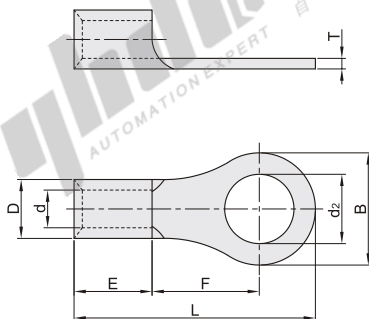

视角标准：第一视角

销售方式	每袋数量
袋	见参数表

型号		销售方式 (PCS/袋)	适用电线规格		外形尺寸(mm)								最大电流 I _{max}	适用压接 工具
代码	压接规格		截面积(mm ²)	AWG	d ₂	B	F	L	E	D	d	T		
ZKT21	3	1.25	0.5~1.5	22~16	3.2	5.7	4.95	12.6						
	3.5													
	3.5M				3.7	6.6	6.3	14.4						
	3.5L					8	7	15.8						
	4				4.3	6.6	6.3	14.4						
	4L					8	7	15.8	4.8	3.4	1.7	0.7	19A	
	5				5.3									
	5L					9.8	8.3	17.8						
	6S				6.4									
	6					11.6	11.2	21.8						
	8				8.4									
	10				10.5	13.6	13.9	25.5						
	12				13	19.2	16	30.4						
	3	2	1.5~2.5	16~14	3.2		4.5	12.3						
	3.5					6.6								
	3.5M				3.7		7.9	16						
	3.5L					8.5	7.75	16.8						
	4				4.3	6.6	7.9	16						
	4L					8.5	7.75	16.8	4.8	4	2.3	0.8	27A	
	5S				5.3									
	5					9.5	7.5	17.1						
	6S				6.4									
	6					12	11	21.8						
	8				8.4									
	10				10.5	13.6	13.9	25.5						
	12				13	19.2	16	30.4						
	4	3.5	2.5~4	14~12	4.3									
	5S				5.3	8	7.7	17.7						
	6				6.4	12	9.4	21.4	6	5	2.9	1	37A	
	8					8.4								
	10				10.5	15	13.5	27						
	3.5				3.7									
	4S					7.2	5.9	15.5						
	4				4.3									
	5				5.3	9.5	8.85	19.6						
	6													
ZKT21	6L	5.5	4~6	12~10	6.4	12	10.7	23.5						
	8					13		25.8	6.8	5.5	3.4	1	48A	
	10				10.5	15	13.7	28						
	12				13	19.2	16	31.6						
	3													
	3.5													
ZKT21	3	1.25	0.5~1.5	22~16	3									
	3.5													
	3.5M				3.7	6.6	6.3	14.4						
	3.5L					8	7	15.8						

ZIQ07-8
(见官网)

压着端子



代码	压接规格	螺丝规格	销售方式 (PCS/袋)
ZKT21	1.25	3	无指定(1000PCS/袋)
		3.5	100(100PCS/袋)

ZKT21-1.25-3

型号		销售方式 (PCS/袋)	适用电线规格		外形尺寸(mm)								最大电流 I _{max}	适用压接 工具
代码	压接规格		截面面积(mm²)	AWG	d ₂	B	F	L	E	D	d	T		
ZKT21	8	4S	500	6~10	8	4.3	8	9.3	21.8					
		5S				5.3	8.8	10.9						
		5					12	9.3	23.8					
		6				6.4				8.5	7.2	4.5	1.2	62A
		8				8.4	15	13.8	29.8					
		10				10.5								
	14	12	500	10~16	6	13	20	15	33.5					
		4				4.3								
		5				5.3	12	13.3	29.8					
		6				6.4				10.5	9	6	1.4	88A
		6L				8.4	16	14	32.5					
		8				10.5								
	22	10	250	16~25	4	13	22	19.5	41					
		12				5.3	12.2	15.1	33.2					
		5S				6.4				12	11.5	8.1	1.8	115A
		6				8.4	16.5	13.5	33.7					
		8				10.5								
		10				13	22	19.5	42.5					
	38	12	200	35~50	2	6.4	15.3	17.4	39					
		6S				8.4	22	17.7	42.7	14	13.3	9.7	1.8	160A
		8				10.5	15.3	17.4	39					
		10S				10.5	22	17.7	42.7					
		10				13								
		12				6.4								
	60	6	100	50~70	1	8.4	22	20.7	49.7					
		8				10.5				18	15.4	11.8	1.8	215A
		10				13								
		12				15	32	23.5	57.5					
		14				6.4								
		6				8.4	24	20	51	19	17.5	13.5	1.9	235A
	70	8	50	70	2	10.5								
		10				13	32	27	61					
		12				6.4								
		14				8.4								
		16				10.5	27	20.7	54.2	20	19.5	15.1	2.2	255A
		8				13								
	80	10	50	95	3	8.4								
		12				10.5	28.5	20.4	55.6	21	22.1	17.1	2.5	300A
		8				13								
		10				8.4								
		12				10.5	36	23	68	27	26.6	20.2	3.2	395A
		8				13								
	100	10	25	120	4	17								
		12				33.5								
		8				94.3								
		10				21	50.5	45	105.7	35.5	37.1	28.7	4.2	650A
		12				23								
		16												
	325	20	5	300	500/600									
		22												



请按图示订货

型号		螺丝规格
代码	压接规格	
ZKT21	8	4S
		5S

ZKT21-8-4S