


微型带凸缘深沟球轴承

双面带防尘盖式 标准型



代码	类型	轴承类型 代码	轴承精度	后置代码	轴承材质	
					国标	相当
BAL	标准型	6	GB/T 307.1 6级	ZZ(双面带防尘盖)	GCr15	SUJ2
BAL...-SUS					9Cr18Mo	SUS440C

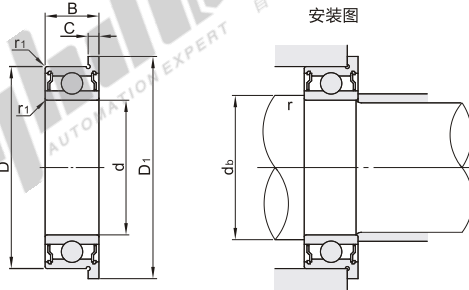

安装图

❶ 不承诺品牌。
❷ 基本额定负载/极限转速/重量值不适用于SUS440C材质。

视角标准：第一视角

代码	轴承型号	型号						基本额定负载(N)		极限转速 rpm (参考)	安装尺寸		重量 (g) (参考)
		d	D	B	D ₁	C	r ₁ (min)	Cr(动)	Cor(静)		d _b (min)	r (max)	
		BAL BAL...-SUS	682ZZ	2	5	2.3	6.1	0.6	0.08	135	40	68000	2.7
	692ZZ	2.5	6	3	7.5	0.8	0.15	264	79	60000	3	0.15	0.44
	682AZZ		2.6	7.1	0.8	0.08	167	59	56000	3.7	0.08	0.41	
	692AZZ	7	3.5	8.5	0.9	0.15	308	103	50000	3.85	0.15	0.67	
	673ZZ	6	2.5	7.2	0.6	0.08	193	75	56000	3.6	0.08	0.25	
	683ZZ	7	3	8.1	0.8	0.1	312	104	50400	3.9	0.1	0.52	
	693ZZ	3	8	4	9.5	0.9		448	144	48000			0.71
	603ZZ	9	5	10.5		0.15	456	151	4400	4.2	0.15	1.6	
	623ZZ	10	4	11.5	1		512	179	40000			1.79	
	674ZZ	7	2.5	8.2	0.6	0.08	177	70	48000	4.6	0.08	0.34	
	684ZZ	9		10.3		0.15	512	179	42000	5	0.1	1.13	
	694ZZ	4	11	4	12.5		572	220	38000	5.2	0.15	2	
	604ZZ	12		13.5	1	0.2	765	280			0.2	2.56	
	624ZZ	13	5	15		0.2	1048	392	32000	5.6		3.49	
	675ZZ	8	2.5	9.2	0.6	0.08	173	72	42000		0.08	0.39	
	685ZZ	11	5	12.5		0.15	572	225	36000	6.2	0.15	2.17	
	695ZZ	5	13	4	15	1	0.2	864	344	34000	6.6	0.2	2.69
	605ZZ	14		16		0.2	1064	404	32000			3.89	
	625ZZ	16	5	18		0.3	1383	540	28000	7.7	0.3	5.51	
	676ZZ	10	3	11.2	0.6	0.1	372	156	36000	6.6	0.1	0.73	
	686ZZ	13	5	15	1.1	0.15	864	352	32000	7	0.15	3.03	
	696ZZ	6	15	5	17	1.2	0.2	1080	424	32000	7.6	0.2	4.29
	606ZZ	17	6	19		0.3	1752	692	30000	8	0.3	6.49	
	626ZZ	19		22	1.5		1868	716	25000			9.77	
	678ZZ	12	3.5	13.6	0.8	0.1	412	201	32000	8.8	0.1	0.85	
	688ZZ	16	5	18	1.1	0.2	1288	572	28000	9.6	0.2	4.46	
	698ZZ	19	6	22	1.5	0.3	1592	692			0.3	8.39	
	608ZZ	22	7	25		0.3	2680	1120	2700	10		13	
	6700ZZ	15	4	16.5	0.8	0.15	684	348	12000	10.3	0.15	2.09	
	6800ZZ	10	19	5	21	1	0.3	1372	672	29000	12	0.3	6.09
	6900ZZ	22	6	25	1.5	0.3	2156	1018	27200	13.2		11.09	
	6701ZZ	18	4	19.5	0.8	0.2	740	424	10000	12.4	0.2	3.39	
	6801ZZ	12	21	5	23	1.1	0.3	1532	832	26000	14	0.3	7.09
	6901ZZ	24	6	26.5	1.5		2308	1172	24000			13.19	
	6702ZZ	21	4	22.5	0.8	0.2	749	465	8800	15.4	0.2	3.89	
	6802ZZ	15	24	5	26	1.1	0.3	1658	1002	22000	17	0.3	8.29
	6902ZZ	28	7	30.5	1.5		3456	1807	20000			19.89	
	6703ZZ	23	4	24.5	0.8	0.2	800	526	7600	17.4	0.2	4.39	
	6803ZZ	17	26	5	28	1.1	0.3	1786	1164	20000	19	0.3	8.89
	6903ZZ	30	7	32.5	1.5		3670	2052	18000			21.39	
	6704ZZ	27	4	28.5	0.8	0.2	832	583	6800	20.4	0.2	6.29	
	6804ZZ	20	32	7	35	1.5		3212	1969	16000			19.79
	6904ZZ*		37	9	40	2	0.3	51048	2945	15000		0.3	42.79
	6805ZZ		7		1.5		3442	2345	14000			26.09	
	6905ZZ	25	42	9	45	2		5600	3632	12000	27		50.19

❶ 带*规格仅适用SUJ2材质。

❶ 1Kg=9.81N



型号		d	D
代码	轴承型号		
BAL	682ZZ	2	5
	692ZZ		6

BAL682ZZ



优惠价	
数量	1~9 10~
价格	100% 另行报价

