

LB16E3 Short Large current


迷你短款大电流金属按钮

Mini Short-lagre Current Button Switch
Ith:20A 250VAC

1NO



低功耗LED: ≤20mA
Low Power Consumption LED: ≤20mA
常规电压: 5-24V 220V, 定制其它电压
Normal Voltage: 5-24V 220V, Customizable Other Voltage
常规颜色: 红色、绿色、蓝色; 定制: 黄色、白色
Normal Color: Red/Green/Blue; Customizable: Yellow/White



Ith
大电流开关
High-Current



23mm
短款设计
Short Design



4000米
适合海拔
Long Life LED



50万次
机械寿命
Mechanical Life



V0
连接端耐温阻燃
Antif Laming



-40~80℃
抗耐温范围
Environment



IP66/IK08
防水防尘
Protection Level



CCC RoHS REACH UL
专利及认证
Certificate



凹面头部,方便按压
Concave Head








配套插件
Connector




镀银长插脚
Silver Long Plated Pins




高亮均匀发光
Even and Soft LED

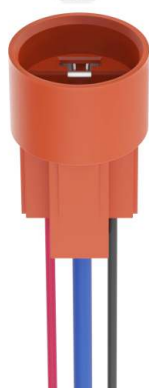

短脚无接插件
Short pin without connector



1mm² 蓝色线 Blue Wire (NO)
0.3mm² 黑色线 Black Wire (LED-)
0.3mm² 红色线 Red Wire (LED+)

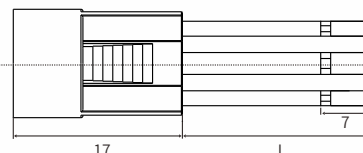

标准线长150mm, 可定做其它尺寸
Wire Length: 150mm, Customize other Sizes

金属按钮、旋钮、钥匙钮、急停钮命名规则

Naming convention for metal buttons, knobs, key buttons and emergency stop buttons

LB

Ø

◇

-

★

◆

■

/

◎

▲

▼

◎

☆

/

※

其它备注: 定制符号、防水要求、特殊颜色要求等
Other remarks: customized symbols, waterproof requirements, special color requirements, etc

接线: J-螺丝脚 (蜂鸣器) Wiring: J-screw pin (buzzer)

档位: 2-2档 3-3档 (此选项只针对旋钮及钥匙钮, 其它开关忽略此项)
Gear position: 2- 2nd gear, 3-3rd gear (this option only applies to knobs and key knobs, ignored for other switches)

外壳材质: S-不锈钢 N-镀铬 (镀镍) A-铝氧化 PC-塑料 ST-镀钛
Shell material: S-stainless steel N-chromium plated (nickel plated) A-aluminum oxide PC-plastic ST-Titanium plated

带灯电压: 3-8V/25-48V/110V为定制电压 5-24V/9-24V/220V 常规电压
Voltage with lamp: 3-8V/25-48V/110V, customized voltage 5-24V/9-24V/220V, conventional voltage

发光颜色: R-红 G-绿 B-蓝 Y-黄 W-白 O-橙 (定制)
Glow color: R-red G-green B-blue Y-yellow W-white O-orange (customization)
RG-红绿 RB-红蓝 RG-红绿蓝 RW-红绿白 (注: 只有A系列可做双色, 三色)
RG-red green RB-red blue RG-red green blue RW-red green white (Note: Only the A series can be made in two or three colors)

发光类型: E-环形 E+DY-环形+电源标 DY-电源标 D-点灯 E+XD-环形+小点
Luminous type: E-annular E+DY-annular+Power supply sign DY-Powersupply sign D-Lighting E+XD-annular+Small dots

操作类型: F-自复式 Z-自锁式 (保持式) Operation type: F-self resetting Z-self locking (holding)

开关组合: 10-1NO 1C-1NC 11-1NO1NC 20-2NO 22-2NO2NC (NO为常开触点, NC为常闭触点)
Switch combination: 10-1NO 1C-1NC 11-1NO1NC 20-2NO 22-2NO2NC (NO is the normally open contact, NC is the normally closed contact)

头部形状: P-平头 G-高头 Q-球头 Y-钥匙钮 X-旋钮 M-蘑菇头
Head shape: P-Flat head G-High head Q-Ball head Y-Key X-Knob M-Mushroom head

系列号: A[(16A, 19A为1NO1NC, 3A); (19A1, 22A, 25A, 30A, 40A)有1NO1NC或2NO2NC可选, 3A)
Series number B[(12B, 1NO, 2A); (16B, 19B, 1NO, 10A); (22B, 25B, 独立1NO1NC, 7A)]
C[(22C, 25C, 2NO, 15A)]
E[(12E, 1NO, 7A); (16E, 1NO, 2A); (16E3, 1NO, 16A); (19E, 22E, 1NO, 16A)]
Y5 (19Y5, 22Y5, 1NO1NC或2NO2NC可选, 5A, 无灯, 3A) 升级款
X5 (19X5, 22X5, 1NO1NC或2NO2NC可选, 带灯, 3A) 升级款
M3 (22M3, 40mm超大头/1NO1NC, 无灯, 8A) M4 (16 19 22mm, 1NO1NC, 带灯, 3A)
M5.1 (19M5.1, 22M5.1, 大头, 无灯) M5.2 (19M5.2, 22M5.2, 小头, 无灯) M5.4 (19M5.4, 22M5.4, 带灯)
M6 (19M6, 22M6, 短款 (short), 无灯 (no LED)) (M5系列均有1NO1NC或2NO2NC可选, 3A)
SA-塑料按钮 (plastic button) NZ/NZ2-钮子开关 (Button switch) QC-轻触 (Touch lightly) CM-触摸 (Touch)
SM-塑料急停带箭头 (Plastic emergency stop with arrow)
SM2-塑料急停带箭头+STOP (Plastic emergency stop with arrow+STOP)
SM3-塑料急停带箭头 (Plastic emergency stop with arrow)

安装孔直径 (螺纹外径): φ12、φ16、φ19、φ22、φ25、φ30、φ40mm
Installation hole diameter (thread outer diameter): φ12、φ16、φ19、φ22、φ25、φ30、φ40mm
(每个系列里的开孔并不是从φ12-40mm都有, 请参照系列号后括号里的孔径)
(The openings in each series are not derived from φ Available in sizes 12-40mm, please refer to the aperture in parentheses after the serial number)

蓝波代号
LANBOO Code

- 例: 1. 需要16mm开孔、A系列、平头、1NO1NC、自锁、环形、红色发光、LED电压12V、镀铬外壳 对应型号: LB16A-P11Z/ER9-24V/N(L)
1. Requires 16mm opening, A series, flat head, 1NO1NC, self-locking, circular, red emitting, LED voltage 12V, chrome plated shell Corresponding model: LB16A-P11Z/ER9-24V/N(L)
2. 需要22mm开孔、M5.1系列、蘑菇头、2NO2NC、自锁、不锈钢外壳 对应型号: LB22M5.1-M22Z/S/A(L)
2. It needs 22mm opening, M5.1 series, Bowl cut, 2NO2NC, self-locking, stainless steel shell Corresponding model: LB22M5.1-M22Z/S/A(L)
3. 需要19mm开孔、X5系列、旋钮、1NO1NC、LED电压12V、红色发光, 保持式、不锈钢外壳、2档 对应型号: LB19X5-X11Z/R5-24V/S/2(L)
3. Requires 19mm opening, X5 series, knob, 1NO1NC, LED voltage 12V, red light emitting, holding type, stainless steel housing, 2nd gear Corresponding model: LB19X5-X11Z/R5-24V/S/2(L)

