


锁紧螺母

缩紧锁紧型

代码	类型	材质		热处理	表面处理
		国标	相当		
BKC01	缩紧锁紧型	45	S45C	28~32HRC	发黑

特点：该产品通过螺母本身的弹性变形，使螺纹面紧密贴合于外螺纹，实现轴向强力紧固。其锁紧能力优异，适用于易松脱、高扭矩、工作条件恶劣的场合。

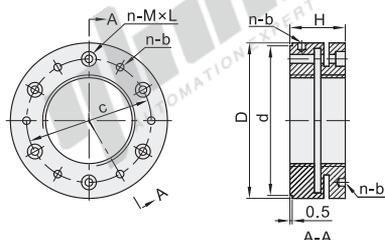

RoHS

螺纹精度：ISO 4H
端面偏摆：0.005

视角标准：第一视角

型号		螺距	D	H	d	c	n-b	n-MxL	扭紧力矩 (N·M)	
代码	公称尺寸									
BKC01	M10	0.75	32	16	29	23	3-4	3-M4×10	3.5	
	M12	1.0	26	14	25	19	3-3	3-M3×10	2.5	
	M15		33		30	23.5		4-M4×12		
	M17		37			26				
	M18	1.5	38			34				
	M20	1.0	40	18		36	30	4-4	4-M4×12	
	M22		42			38	32			
	M24		44				34			
	M25					41				
	M26		45				35			
	M27					46	20		4-M4×14	
	M28						43			
	M30					48				
	M32						47			
	M33	1.5	50				41	4-5		3.5
	M35					53				
	M36						50	44		
	M38					56	22		4-M4×16	
	M39						53			
	M40					58				
	M42					60				
	M45					68			6-M4×16	
	M48					69				
	M50					70				
	M52	2.0	72	25			68		6-M4×18	
M55	1.5	75				71				
M56	2.0					71				
M58	1.5	82				77	6-6			
M60	2.0	84				79		6-M5×18	4.5	
M62						72				
M64	1.5	86				82				
M64	2.0					82		6-M5×20		
M65	1.5	88				84				

型号		螺距	D	H	d	c	n-b	n-MxL	扭紧力矩 (N·M)	
代码	公称尺寸									
BKC01	M65	2.0	88			84	77	6-6		
	M68	1.5	93				80			
	M70	2.0	95	28		89				
	M72	1.5	97				82	6-7	6-M5×20	4.5
	M75	2.0					82			
	M80	1.5	100				91	84		
	M85						94	87		
	M90						103	95		
	M95	2.0	110	32			108	100		
	M100						113	105		
	M105						125	110		
	M110						130	115		
	M115						135	120	6-8	
	M120						128	120		
	M125						140	125		
	M130	3.0	145	34			138	130		8
	M140	2.0	155				146	136		
	M150	3.0	160	36			150	140		
	M160						156	148		
	M170	2.0	165				168	160		
	M180						178	170		
	M190						205	182		
	M200	3.0	180	38			204	193		
	M210						216	205		
	M220	4.0	190				226	215		
	M230						234	223		
	M240	3.0	205	40			253	243		
	M250						255	243		
	M260	4.0	215				253			
	M270						265	251		
M280	3.0	230				270	257			
M290						275	261			
M300	4.0	245	42			285	271			
						295	283			
						315	303	8-12		
						335	323		35	

关节轴承

E7



请按图示订货

型号			
代码	公称尺寸	螺距	D
(BKC01)	(M10)	(0.75)	32
(BKC01)	(M10)	(1.0)	

BKC01—M10—0.75



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

7