


# 锁紧螺母

## 缩紧锁紧型

| 代码    | 类型    | 材质 |      | 热处理      | 表面处理 |
|-------|-------|----|------|----------|------|
|       |       | 国标 | 相当   |          |      |
| BKC01 | 缩紧锁紧型 | 45 | S45C | 28~32HRC | 发黑   |

特点：该产品通过螺母本身的弹性变形，使螺纹面紧密贴合于外螺纹，实现轴向强力紧固。其锁紧能力优异，适用于易松脱、高扭矩、工作条件恶劣的场合。

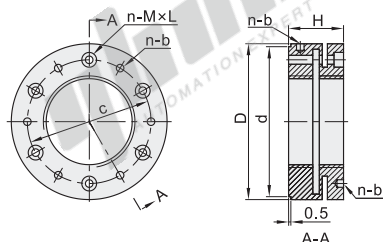

螺纹精度：ISO 4H  
端面偏摆：0.005



视角标准：第一视角

| 型号  | 螺距   | D  | H  | d  | c    | n-b | n-MxL   | 扭紧力矩 (NM) |
|-----|------|----|----|----|------|-----|---------|-----------|
| 代码  | 公称尺寸 |    |    |    |      |     |         |           |
| M10 | 0.75 | 32 | 16 | 29 | 23   | 3-4 | 3-M4×10 | 3.5       |
| M12 | 1.0  | 26 | 14 | 25 | 19   | 3-3 | 3-M3×10 | 2         |
| M15 | 1.0  | 33 |    | 31 | 23.5 |     | 3-M4×10 | 3         |
| M17 |      | 37 |    | 34 | 26   |     |         |           |
| M18 | 1.5  | 38 |    |    | 28   |     |         |           |
| M20 | 1.0  | 40 | 18 | 36 | 30   | 4-4 | 4-M4×12 |           |
| M22 | 1.5  | 42 |    | 38 | 32   |     |         |           |
| M24 |      | 44 |    |    | 34   |     |         |           |
| M25 |      | 45 |    | 41 | 35   |     |         |           |
| M26 |      |    |    |    |      |     |         |           |
| M27 |      | 46 | 20 | 43 | 37   |     | 4-M4×14 |           |
| M28 |      | 48 |    | 45 | 39   |     |         |           |
| M30 |      | 50 |    | 47 | 41   | 4-5 |         | 3.5       |
| M32 |      | 53 |    | 50 | 44   |     |         |           |
| M33 |      | 56 | 22 | 53 | 47   |     | 4-M4×16 |           |
| M35 | 1.5  | 58 |    | 55 | 49   |     |         |           |
| M36 |      | 60 |    | 57 | 51   |     |         |           |
| M38 |      | 62 |    | 59 | 53   |     | 6-M4×16 |           |
| M39 |      | 64 |    | 61 | 55   |     |         |           |
| M40 |      | 66 |    | 63 | 57   |     |         |           |
| M42 |      | 68 |    | 65 | 58   |     |         |           |
| M45 |      | 70 |    | 66 | 60   |     |         |           |
| M48 |      | 72 | 25 | 68 | 62   |     | 6-M4×18 |           |
| M50 | 2.0  | 75 |    | 71 | 65   |     |         |           |
| M52 | 1.5  | 82 |    | 77 | 70   | 6-6 |         |           |
| M55 | 2.0  | 84 |    | 79 | 72   |     | 6-M5×18 | 4.5       |
| M56 | 1.5  |    |    |    |      |     |         |           |
| M58 | 2.0  |    |    |    |      |     |         |           |
| M60 | 1.5  |    |    |    |      |     |         |           |
| M62 | 2.0  |    |    |    |      |     |         |           |
| M64 | 1.5  |    |    |    |      |     |         |           |
| M65 | 2.0  |    |    |    |      |     |         |           |

| 型号   | 螺距   | D   | H  | d   | c   | n-b  | n-MxL    | 扭紧力矩 (NM) |
|------|------|-----|----|-----|-----|------|----------|-----------|
| 代码   | 公称尺寸 |     |    |     |     |      |          |           |
| M65  | 2.0  | 88  |    | 84  | 77  | 6-6  |          |           |
| M68  | 1.5  | 93  |    | 89  |     |      |          |           |
| M70  | 2.0  | 95  | 28 |     | 82  | 6-7  | 6-M5×20  | 4.5       |
| M72  | 1.5  | 97  |    | 91  | 84  |      |          |           |
| M75  | 2.0  | 100 |    | 94  | 87  |      |          |           |
| M80  | 1.5  | 110 |    | 103 | 95  |      |          |           |
| M85  |      | 115 |    | 108 | 100 |      |          |           |
| M90  |      | 120 |    | 113 | 105 |      |          |           |
| M95  | 2.0  | 125 | 32 | 118 | 110 |      | 6-M6×22  |           |
| M100 |      | 130 |    | 123 | 115 |      |          |           |
| M105 |      | 135 |    | 128 | 120 | 6-8  |          |           |
| M110 |      | 140 |    | 133 | 125 |      |          |           |
| M115 |      | 145 | 34 | 138 | 130 |      |          | 8         |
| M120 |      | 155 |    | 146 | 136 |      |          |           |
| M125 |      | 160 | 36 | 150 | 140 |      | 6-M6×25  |           |
| M130 | 3.0  | 165 |    | 156 | 148 |      |          |           |
| M140 | 2.0  | 180 | 38 | 168 | 160 |      | 8-M6×25  |           |
| M150 | 3.0  | 190 |    | 178 | 170 |      |          |           |
| M160 |      | 205 |    | 193 | 182 |      |          |           |
| M170 |      | 215 |    | 204 | 193 |      |          |           |
| M180 | 3.0  | 230 |    | 216 | 205 |      | 8-M8×30  |           |
| M190 |      | 240 | 40 | 226 | 215 | 8-10 |          |           |
| M200 |      | 245 |    | 234 | 223 |      |          | 18        |
| M210 | 4.0  |     |    | 253 |     |      | 8-M8×25  |           |
| M220 | 3.0  | 265 |    | 255 | 243 |      | 8-M8×30  |           |
| M230 | 4.0  |     |    | 253 |     |      |          |           |
| M235 |      | 275 |    | 265 | 251 |      |          |           |
| M240 | 3.0  | 285 |    | 270 | 257 |      |          |           |
| M250 |      | 285 |    | 275 | 261 |      |          |           |
| M260 | 4.0  | 295 | 42 | 285 | 271 |      | 8-M10×30 |           |
| M280 | 3.0  | 305 |    | 295 | 283 | 8-12 |          | 35        |
| M300 | 4.0  | 325 |    | 315 | 303 |      |          |           |
|      |      | 345 |    | 335 | 323 |      |          |           |



请按图示订货

| 代码    | 公称尺寸 | 螺距   | D  |
|-------|------|------|----|
| BKC01 | M10  | 0.75 | 32 |

BKC01-M10-0.75



未税价(元)

优惠价

| 数量 | 1~9  | 10~  |
|----|------|------|
| 价格 | 100% | 另行报价 |



交货期

7