



代码	类型	主体材质	表面处理
BMS74	标准型	铸铝	烤漆




规格：045

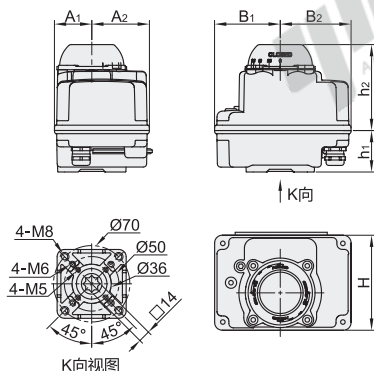


规格: 05/08/15

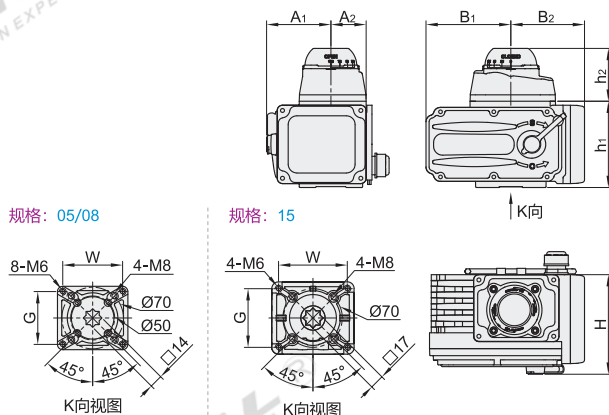

规格：25/50

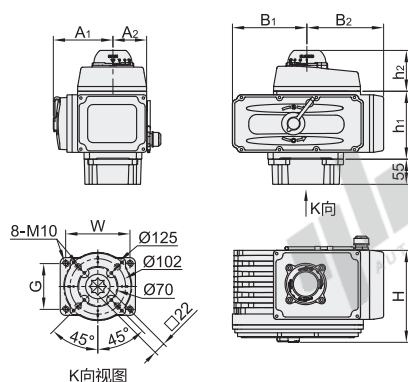

规格：100/200

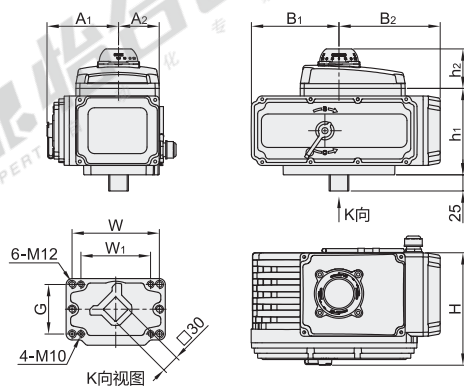

视角标准：第一视角

型号		电源类型	动作时间 (S)	输出力矩 (N.M)	电机功率 (W)	额定电流 (A)	A ₁	A ₂	B ₁	B ₂	h ₁	h ₂	H	W	W ₁	G	整机重量 (KG)			
代码	规格																			
BMS74	045	DC24V	12	35	6	2	34	53	60	65	38	78	87	—		—	1.5			
		AC220V	23	50														5	0.32	
		DC12V	10	50		3.2														
	DC24V	1.8																		
	05		AC24V	15	40	10	2.2	73	40	96.5	83.5	98	60	113	68		60	3.2		
		AC24V	30	80																
		AC220V	15	40																
		AC220V	30	80																
		AC380V	15	40																
	08	AC380V	30	80	13	0.15														
		AC220V	15	50																
		AC220V	30	100																
		AC380V	15	50																
		AC380V	30	100																
	15	DC12V	15	140	30	4														
		DC24V																		80
		DC220V																		
		AC24V	30	150	25	0.64	83.5	44.5	106.5	112	100.5	63	128	82		70	4.4			
AC110V		15	80																	
AC110V		30	150																	
AC220V		15	80																	
AC220V		30	150																	
AC380V	15	80																		
AC380V	30	150		0.19																

电动执行器

标准型

过程控制

型号		电源类型	动作时间 (S)	输出力矩 (N.M)	电机功率 (W)	额定电流 (A)	A ₁	A ₂	B ₁	B ₂	h ₁	h ₂	H	W	W ₁	G	整机重量 (KG)
BMS74	25	DC24V	30	300	90	3.75											9
		AC24V				1											
		AC220V			40	0.48											
		AC380V				0.25											
	50	DC12V	15	500		5	107		134.5	143.5	125		169	118	—		10
			30	600													
			15	500		3.75											
		DC24V	30	600		2.4											
	100	AC220V				0.92											12
		AC380V				0.45	62				60						
		DC12V				5											
		DC24V	22	1000	90	3.75											
	200	AC24V	60	1500		2.4											12.5
		AC220V				0.92											
		AC380V				0.45	109		133.5	154.5	132		171	148	118		
		DC12V	33			5											
	200	DC24V	30			3.75											12.5
		AC24V	100	2500		2.4											
		AC220V				0.92											
		AC380V				0.45											

技术参数

转动角度	0°~90°±5
绝缘电阻	≥1MΩ
防护等级	IP67
安装角度	任意角度
电气接口	M16×1.5塑料防水电缆接头(045规格) M20×1.5塑料防水电缆接头
环境温度	30℃~+60℃



请按图示订货

型号		电源类型	动作时间 (S)	输出力矩 (N.M)
代码	规格			
BMS74	25	DC24V	30	300

BMS74 — 25 — DC24V — 30 — 300



未税价(元)

优惠价

数量	1~99	100~
价格	100%	另行报价



交货期

7