





◀ 固定側

- ❗ ①②③为一体，请勿拆解，否则将影响精度。
- ❗ 轴承已经封入适量锂皂基抗极压润滑脂。
- ❗ 使用经预压调整后的JIS 5级的角接触球轴承、最适用于高精度、高速旋转用途。

编号	零件名称	数量
①	轴承座本体	1
②	角接触球轴承 5级	1对
③	轴承盖	1
④	间隔环	2
⑤	内六角紧定螺丝附铜片	2
⑥	紧固螺帽	1
⑦	油封	2
⑧	聚酯缓冲块	1

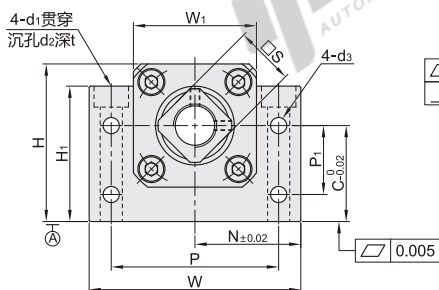

视角标准：第一视角

型号		Ød	T	T ₁	T ₂	T ₃	W	H	C	W ₁	H ₁	P	P ₁	P ₂	P ₃	Ød ₁	Ød ₂	t	N	Ød ₃	S	缓冲块尺寸					适用 油封 轴径	建议轴端加工尺寸															
代码	规格																						X	Y	Z	r	V	Ød _d	配转 轴径	轴端部 外径	轴端部 加工尺寸	公称螺纹	副键长 度										
LEB68	10S																										12																
	10	10	25	5	29.5	5	60		39	22	34			15		13		6	6.6	11		5	30		16		34	10	6	12		12/ 14/15	10 ^{+0.005/-0.012}	8	36	15	M10×P1.0	16					
	12	12							43	25	35					6				1.5			19			13		7	14		15.4	14/ 15/16	12 ^{+0.005/-0.012}	10				M12×P1.0	14				
	15	15	27	6	32	6	70	48	28	40	38	54		18		15					6.5	35		22	42	16		17		19.4	18/20	15 ^{+0.005/-0.014}	12	40	20				M15×P1.0	12	6		
	17	17		9	44	7	86	64	39	50	55	68	28		19	8	9	14		8.6	43		24		19		10	22		24.4	20/25	17 ^{+0.005/-0.014}	15	53	23				M17×P1.0	17	7		
	20	20		8	43	8	88	60	34	52	50	70	22							8.5	44		6.6		30		54		20	23		27.4	25/28	20 ^{+0.005/-0.014}	17		25				M20×P1.0	15	8
	25	25	42	12	54			106	80	48	64	70	85		33	22	10	11	17.5	11	53	9	35	66	23	13	28		31.4	32/36	25 ^{+0.005/-0.014}	20	65	30				M25×P1.5	18				
	30	30	45		61		9	128	89	51	76	78	102		23	11		20		64		11	40	80	28	15	33		37.4	36/40	30 ^{+0.005/-0.015}	25	72	38				M30×P1.5	25				
	35	35	50		67	12	140	96	52	88	79	114	35	26	12	14	20	13		70			50	88	32	17	38		44.4	45	35 ^{+0.008/-0.018}	30	82	45				M35×P1.5	26	12			
40	40	61	18	76	15	160	110	60	100	90	130	37	33	14	18	26	17.5	80	14			100	35	20	42		49.4	50	40 ^{+0.008/-0.018}	35	94	50				M40×P1.5	30	15					



请按图示订货

型号	
代码	规格
LB68	10
	20

LB68—10



未税价(元)

● 优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

7