


带肩铰链销 ◀ 标准型

代码	类型	材质		硬度	表面处理
		国标	相当		
MIA11	标准型 L尺寸指定型	45	S45C	—	发黑
MIA12				40~45HRC	
MIA13				—	无电解镀镍
MIA14				40~45HRC	
MIA15		0Cr18Ni9	SUS304	40~45HRC 镀层硬度850HV~	镀硬铬,镀层厚度3~5μm
MIA21				48~53HRC	—
MIA31				40~45HRC 镀层硬度850HV~	镀硬铬,镀层厚度3~5μm
MIA32		9Cr18	SUS440C	40~45HRC 镀层硬度850HV~	镀硬铬,镀层厚度3~5μm



① 适用标准: GB/T 882-2008

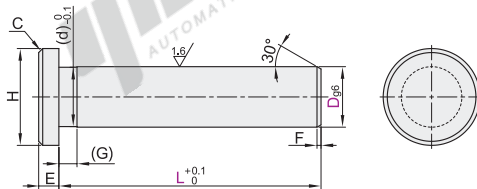

① 工艺孔加工条件: $4 \leq D \leq 11$ 且总长度 ≥ 70 ; $11 < D \leq 18$ 且总长度 ≥ 90 ; $D > 18$ 且总长度 ≥ 110 。(工艺孔详细尺寸见产品简介)



型号			L 最小单位0.1	(d)	E	H	C	F	(G)
代码	D _{g6}								
MIA11 MIA12 MIA13 MIA14 MIA15 MIA21 MIA31 MIA32	3	-0.002 -0.008	5.0~60.0	2.9	1	5	0.5	1	
	4	-0.004 -0.012	10.0~60.0	3.9	1.6	6			
	5			4.9	2	8			
	6		10.0~110.0	5.8	2	10	1	2	
	8	-0.005 -0.014		7.8	3	14			
	10		15.0~110.0	9.8		18			
	12		15.0~220.0	11.8	4	20			1.5
	14	-0.006 -0.017		13.8		22	1.6	3	
	16			15.8	4.5	25			
	18			17.8	5	28			
	20		20.0~220.0	19.8		30			
	22			21.8	5.5	33			
	24	-0.007 -0.020		23.8	6	36			
	27			26.8		40			
	30			29.8		44			
	33			32.7	8	47	2	4	
	36			35.7		50			2
	40	-0.009 -0.025	30.0~220.0	39.7		55			
	45			44.7		60			
	50			49.7	9	66			

悬臂铰链销

A5



请按图示订货

型号		L
代码	D	
MIA11	3	5.0~60.0
MIA12	4	

MIA11 — D3 — L12



未税价(元)

数量	优惠价	
	1~9	10~
价格	100%	另行报价



① MIA11/13/21

交货期
3



① MIA31

交货期
5



① MIA12/14/15/32

交货期
6