

导向轴

带挡圈槽型 直杆型


代码	类型	D公差	材质		硬度	表面处理
			国标	相当		
Y-FCB02			GCr15	SUJ2	高频淬火	镀硬铬，镀层硬度HV850~，镀层厚度3~5μm
Y-FCB06	带挡圈槽型	g6			有效硬化层深度见P131	
Y-FCB07			9Cr18Mo	SUS440C	淬火硬度	—
					GCr15	HRC56~
					9Cr18Mo	HRC54~
						镀硬铬，镀层硬度HV850~，镀层厚度3~5μm



RoHS



来图定制

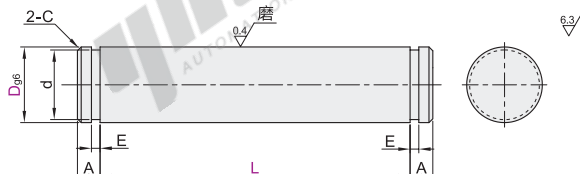

① 圆度/直线度/垂直度/同轴度/硬度变化/铬层分布，请参阅导向轴产品简介。

视角标准：第一视角

型号			L	A	E	d	附带挡圈(2个)		C		
代码	D _{g6}	最小单位1					Y-FCB06	Y-FCB02/07			
Y-FCB02 Y-FCB06 Y-FCB07	3	-0.002 -0.008	8~400	2	0.5	+0.05 0	2	+0.06 0	TBP11-2	TBP12-2	0.5
	4						3		TBP11-3	TBP12-3	
	5	-0.004 -0.012			0.7	+0.1 0	4	+0.075 0	TBP11-4	TBP12-4	
	6						5		TBP11-5	TBP12-5	
	8	-0.005 -0.014	15~600	3	0.9		7	+0.09 -0.09	TBP11-7	TBP12-7	1.0
	10		15~800			9.6		TBP01-10	TBP02-10		
	12		15~1000	3.5	1.15		11.5		TBP01-12	TBP02-12	
	13		20~1000				12.4		TBP01-13	TBP02-13	
	15	-0.006 -0.017	20~1200				14.3	0 -0.11	TBP01-15	TBP02-15	
	16		25~1200				15.2		TBP01-16	TBP02-16	
	18				17		TBP01-18	TBP02-18			
	20				19		TBP01-20	TBP02-20			
	25	-0.007 -0.020		30~1200	4.5	1.35		23.9	0 -0.21	TBP01-25	TBP02-25
	30						28.6		TBP01-30	TBP02-30	

① 适用挡圈请参阅怡合达电商平台。



请按图示订货

型号	D	L	A
Y-FCB06	4	8~400	2
Y-FCB07	4	8~400	2

Y-FCB06—D3—L12

② 可选加工


型号	D	L	可选加工代码
Y-FCB06	4	8~400	HC
Y-FCB07	4	8~400	HC

Y-FCB06—D3—L12—HC



可选加工

代码	技术说明
HC	一端挡圈槽取消 选型方法 HC



① 可选加工可能会使产品硬度降低。



未税价(元)

● 优惠价

数量	1~9	10~
价格	95%	另行报价