


线槽

PVC方形线槽


标准型

代码	类型	销售方式	材质	颜色	阻燃等级	温度
ZIK04	标准型	根	环保硬质PVC	灰色	UL94V-0	-20°C~+70°C
ZIK09		盒				


特性：开口齿槽，反扣式槽盖与槽体设计组合后绝不脱落，且接合面平滑，不割伤手及擦损附近配线。

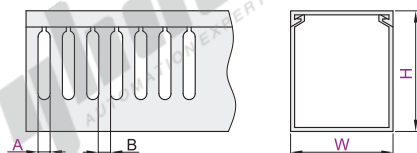

W ≤ 60mm 线槽底部孔尺寸



W ≥ 80mm 线槽底部孔尺寸



视角标准：第一视角

型号		W	A	B	销售方式：根	销售方式：盒
代码	H				长度(米)	包装方式(根/盒)
					仅ZIK04	仅ZIK09
ZIK04	20	20				130
	25	20				110
		25				90
		30				100
		35				80
		40				70
		45				60
		50				50
		55				40
		60				36
		65				30
		70				24
		75				20
		80				16
		85				12
		90				10
		95				8
		100				6
		105				4
		110				3
ZIK09	45	33	8	若A尺寸为4, B尺寸则为6	2	40
	50	38	8	若A尺寸为6, B尺寸则为7		36
	55	43	8	若A尺寸为8, B尺寸则为10		30
	60	48	8	若有区别请以实物尺寸为准。		24
	65	53	8			20
	70	58	8			16
	75	63	8			12
	80	68	8			10
	85	73	8			8
	90	78	8			6

型号		W	A	B	销售方式：根	销售方式：盒
代码	H				长度(米)	包装方式(根/盒)
					仅ZIK04	仅ZIK09
ZIK04	45	45				40
	50	50				36
	55	55				30
	60	60				24
	65	65				18
	70	70				12
	75	75				10
	80	80				8
	85	85				6
	90	90				4
	95	95				3
	100	100				2
	105	105				1
	110	110				1
	115	115				1
	120	120				1
	125	125				1
	130	130				1
	135	135				1
	140	140				1
ZIK09	45	45	4	若A尺寸为4, B尺寸则为6	2	40
	50	50	4	若A尺寸为6, B尺寸则为7		36
	55	55	4	若A尺寸为8, B尺寸则为10		30
	60	60	4	若有区别请以实物尺寸为准。		24
	65	65	4			20
	70	70	4			16
	75	75	4			12
	80	80	4			10
	85	85	4			8
	90	90	4			6



请按图示订货

型号		W	A
代码	H		
ZIK04	40	40	4
ZIK09	50	25	6

ZIK04 — H40 — W40 — A4