





固定调节型 · 全橡胶底座型 ▶
轻载型

防震脚杯

代码	类型	材质		表面处理
		螺杆	底部	螺杆
WAC02	全橡胶底座型	S45C	橡胶	镀锌
WAC06				镀铬
WAC05		SUS304		—

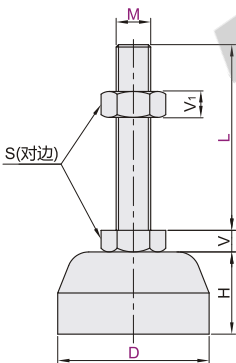

视角标准：第一视角

型号		M	L	螺距	S	H	V	V1	承载(Kg)	参考重量(Kg/pcs)	
代码	D									WAC02/06	WAC05
WAC02 WAC06 WAC05	70	16	75	2	24	39	10	13	100	0.21	0.23
			100							0.24	0.26
			125							0.30	0.31
			150							0.32	0.34
		20	100	2.5	30		12	16		0.25	0.26
			125							0.31	0.33
			150							0.34	0.35



请按图示订货

型号			
代码	D	M	L
WAC02	70	16	75
			100

WAC02—D70—M16—L75

可选加工

型号				
代码	D	M	L	可选加工代码
WAC02	70	16	75	WS WL BS
			100	

WAC02—D70—M16—L75—WS



未税价(元)

优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

1




可选加工

代码

技术说明

WS

螺杆末端加工外四角




选型方法

WS

M	n	e
10	6	
12	8	10
14		
16	10	12
20	12	13.5
24	14	15
30	18	22

WL

螺杆末端加工外六角




选型方法

WL

M	n1	e1
10	6	
12	8	
14	9	10
16	10	
20	13	14
24	16	18
30	20	21

BS

螺杆末端加工扳手槽



选型方法

BS

M	n2	ee	e2
10	8	8	
12	10		
14	12		12
16	13	10	
20	17		
24	20		18
30	26	15	

代码	技术说明																								
NS	螺杆末端加工内四角	选型方法 NS																							
		<table> <tr> <th>M</th><th>n3</th><th>e3</th></tr> <tr> <td>10</td><td>5</td><td></td></tr> <tr> <td>12</td><td>6</td><td>10</td></tr> <tr> <td>14</td><td></td><td></td></tr> <tr> <td>16</td><td>8</td><td>12</td></tr> <tr> <td>20</td><td>10</td><td>13.5</td></tr> <tr> <td>24</td><td>10</td><td>15</td></tr> <tr> <td>30</td><td></td><td>20</td></tr> </table>	M	n3	e3	10	5		12	6	10	14			16	8	12	20	10	13.5	24	10	15	30	
M	n3	e3																							
10	5																								
12	6	10																							
14																									
16	8	12																							
20	10	13.5																							
24	10	15																							
30		20																							
NL	螺杆末端加工内六角	选型方法 NL																							
		<table> <tr> <th>M</th><th>n4</th><th>e4</th></tr> <tr> <td>10</td><td>4</td><td>5</td></tr> <tr> <td>12</td><td>6</td><td></td></tr> <tr> <td>14</td><td></td><td>8</td></tr> <tr> <td>16</td><td>8</td><td>10</td></tr> <tr> <td>20</td><td>10</td><td>12</td></tr> <tr> <td>24</td><td>12</td><td>15</td></tr> <tr> <td>30</td><td>16</td><td>18</td></tr> </table>	M	n4	e4	10	4	5	12	6		14		8	16	8	10	20	10	12	24	12	15	30	16
M	n4	e4																							
10	4	5																							
12	6																								
14		8																							
16	8	10																							
20	10	12																							
24	12	15																							
30	16	18																							

① 请根据脚杯螺杆尺寸M进行加工参数的选择;

② 加工部不带镀层, 有防锈漆;

③ 工具可根据不同加工类型进行选择, 可选用开口扳手、活动扳手、内四角扳手、内六角扳手等。