



滑块座外球面球轴承 ▶ 带座轴承

铸造型

带座轴承

代码	类型	材质	
		轴承座	轴承
E-BDX	过渡配合	经济型	HT200灰铸铁
BDX			GCr15
BDX05	标准型		SUS304
T-BDX			SUS420
	间隙配合	HT200灰铸铁	GCr15

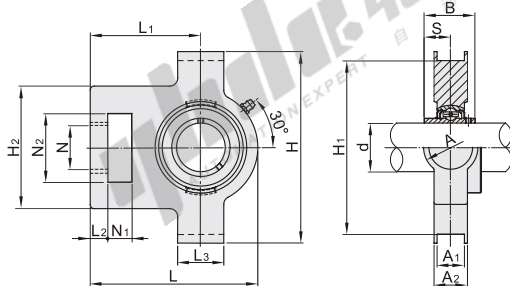

- ❑ 轴承内径公差: H7
外形非安装尺寸公差: CT9
- ❑ 轴承座与轴承芯为过渡配合,
交货产品轴承芯略有倾斜为正常现象,
安装后锁紧螺栓会自动调正。
- ❑ 不承诺品牌。



视角标准：第一视角

❑ 轴承座凹球面公差：过渡配合

型号		国标型号	d	N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A	A ₂	L ₁	B	S	安装孔尺寸(A)公差	安装孔位置度偏差x	基本额定载荷(N)		重量(g)
代码	规格																				动(Cr)	静(Cor)	
经济型 E-BDX	201	UCT201	12																		12800	6650	790
	202	UCT202	15																		14000	7880	780
	203	UCT203	17																		19500	11200	1300
	204	UCT204	20	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	0.6		25700	15200	1600
	205	UCT205	25																		29600	18200	2400
	206	UCT206	30			56	37	22	57		89	102	113	37	28	70	38.1	15.9			31850	20800	2500
标准型 BDX BDX05	207	UCT207	35		13	64	37	22	64												35100	23200	2600
	208	UCT208	40																		43300	29200	4000
	209	UCT209	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49.2	19	0.8		47750	32900	5000
	210	UCT210	50						86												57200	40000	6900
	211	UCT211	55	25	19	102	64	35	95	22	130	146	171	64	42	119	65.1	25.4			60800	45000	7000
	212	UCT212	60						102												66100	49400	7400
经济型 E-BDX 标准型 BDX	213	UCT213	65																		71500	54000	8300
	214	UCT214	70	32	21	111	70	41	121	26	151	167	224	70	48	140	77.8	33.3	±0.8	0.8	83200	63900	11100
	215	UCT215	75																		95900	71400	12200
	216	UCT216	80																		22300	11400	1400
	217	UCT217	85	38	29	124	73	48	157	30	173	198	260	73	54	162	85.7	34.1			27000	15000	1800
	218	UCT218	90	40	40	130	80		140		165	184	235		51						33000	19000	2300
	305	UCT305	25	16	12	62	36	26	65	12	80	89	122	36	26	76	38	15	±0.6		40500	24000	3000
	306	UCT306	30	18	14	70	41	28	74	16	90	100	137	41	28	85	43	17			52800	31800	4100
	307	UCT307	35	20	15	75	45	30	80		100	111	150	45	32	94	48	19	0.7		61800	37900	4900
	308	UCT308	40	22	17	83	50	32	89	18	112	124	162	50	34	100	52				71500	44700	6100
	309	UCT309	45	24	18	90	55	34	97		125	138	178	55	38	110	57				81700	51800	7600
	310	UCT310	50	27	20	98	61	37	106	20	140	151	191	61	40	117	61				93800	60000	9300
	311	UCT311	55	29	21	105	66	39	115		150	163	207	66	44	127	66	25			104100	68000	11100
	312	UCT312	60	31	23	113	71	41	123	22	160	178	220	71	46	135	71	26	±0.8		113400	77000	13000
	313	UCT313	65	32		116	70	43	134		170	190	238	80	50	146	75	30			122900	86500	16200
	314	UCT314	70	36	25	130	85	46	140	26	180	202	252	90	52	155	78	33			132500	96500	19000
	315	UCT315	75			132	85		150		192	216	262		55	160	82	32			144050	108000	21600
	316	UCT316	80	42	28	150	98	53	160	30	204	230	282		60	174	86	34			156600	122000	24900
	317	UCT317	85		30	152			170	32	214	240	298		64	183					173000	140000	30700
	318	UCT318	90			160			175		228	255	312		66	192					204900	178300	39700
	319	UCT319	95	46	31	165	106	57	180	35	240	270	322	110	72	197	103	41			227500	207000	54400
	320	UCT320	100	48	32	175	115	59	200		260	290	345	120	75	210	108	42			253000	241000	69300
	322	UCT322	110	52	38	185	125	65	215	38	285	320	385	130	80	235	117	46	±1		274500	270000	85100
	324	UCT324	120	60	42	210	140	70	230	45	320	355	432	140	90	267	126	51					
	326	UCT326	130	65	45	220	150	75	240	50	350	385	465	150		285	135	54					
	328	UCT328	140	70	50	230	160	80	255		380	415	515	155	100	315	145	59					

❑ 轴承座凹球面公差：间隙配合

型号		国标型号	d	N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A	A ₂	L ₁	B	S	安装孔尺寸(A)公差	安装孔位置度偏差x	基本额定载荷(N)		重量(g)
代码	规格																				动(Cr)	静(Cor)	
T-BDX	204	UCT204	20																		12800	6650	790
	205	UCT205	25																		14000	7880	880
	206	UCT206	30	16		56	37	22	57	12	76	89	94	32	24	62	34	14.3	0.6		19500	11200	1300
	207	UCT207	35		13	64	37	22	64		89	102	113	37	28	70	38.1	15.9			25700	15200	1700
	208	UCT208	40																		29600	18200	2400
	209	UCT209	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49.2	19	0.8		31850	20800	2500
	210	UCT210	50						86												35100	23200	2600



型号		国标型号
代码	规格	
BDX	205	UCT201
BDX05	202	UCT202

BDX05 — 201



优惠价	
数量	价格
1~9	100%
10~	另行报价

