

板型吊钩


标准型

代码	类型	材质
TCF31	标准型	C45


- ① 应使用强度等级10.9级或12.9级的内六角圆柱头螺钉作为安装螺栓。
② 起吊方向需与安装螺栓轴处于同一方向。




D10~40

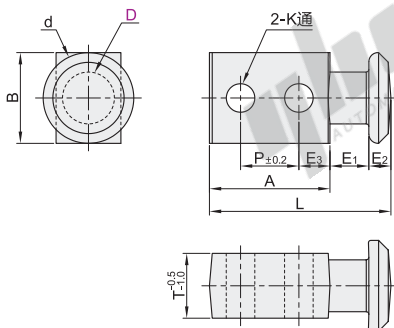


D50

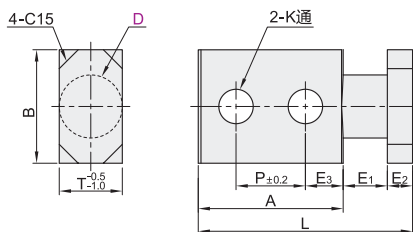

D63

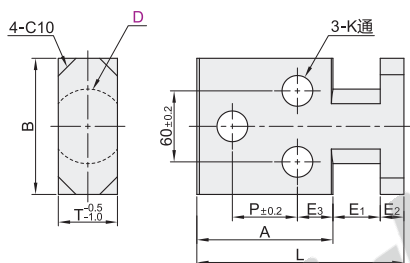

D80

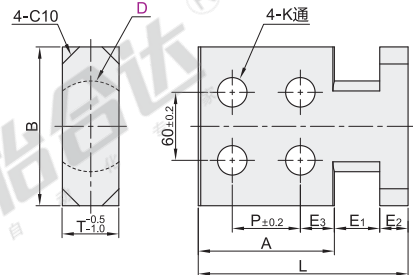

视角标准：第一视角

型号		d	B	T	L	A	E ₁	E ₂	E ₃	P	K	单个载荷 (Kg)
代码	D											
TCF31	10	28	28	18	50	32	10		8	16	7	160
	12	32	32	20	56	38		8	10	18	9	360
	16	36	36	24	67	46	13		12	22	11	460
	20	40	40	26	88	60	18	10	15	30	14	560
	25	48	48	35	92		20	12				670
	32	55	55	40	118	80	25	13	20	40	18	1240
	40	70	70		138	93	30	15	24	45	22	1950
	50		90		170		35					2800
	63	—	115	50	175	115		20	30	55	26	4000
	80		140		185	120	40	25		60		5200

螺丝圈·吊帽
C2



请按图示订货

型号
代码 D
TCF31 10 12

TCF31—D10



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期
7