

带挡圈槽型·台阶型


外螺纹安装型

悬臂销

代码	类型	材质		表面处理	
		国标	相当		
MDE01	带挡圈槽型 台阶型	45	S45C	发黑	
MDE02				无电解镀锌	
MDE06		0Cr18Ni9	SUS304	—	
MDE08		35CrMo	相当于SCM435	无电解镀锌	
MDE09				硬度35~40HRC	发黑



Y≥17时两平面宽度尺寸

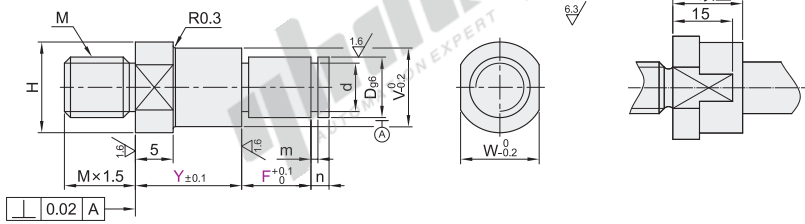

① 外螺纹退刀槽尺寸见表1。

② 工艺孔加工条件：总长度除以D段长度>3且D:M≥4；4≤D≤11且总长度≥70；11<D≤18且总长度≥90；D>18且总长度≥110。(工艺孔详细尺寸见产品简介)

视角标准：第一视角

型号	规格	Dg6	最小单位1		V	H	W	M	d	m	n	
			Y	F								
MDE01 MDE02 MDE06 MDE08 MDE09	3	3	-0.002 -0.008		5	7	5	M3	2	0.5		
	3A				9	11	9			+0.060 0		
	4	4		7~32	3~55	6	8	6	M4	3		
	4A					10	12	10				
	5	5	-0.004 -0.012			7	9	7	M5	4	0.7	2
	5A					11	13	11			+0.075 0	
	6	6				8	10	8	M6	5		
	6A					12	14	12				
	8	8			5~110	10	12	10	M8	7	0.9	
	8A		-0.005 -0.014			14	16	14			+0.090 0	
	10	10				13	15	13	M10	9.6	0 -0.090	3
	10A			7~65		18	20	17				
	12	12				15	17	14		11.5		
	13	13				16	18	15		12.4		1.15
	15	15	-0.006 -0.017			18	20	17	M12	14.3	0	
	16	16				19	21	18		15.2	-0.110	
	17	17				20	22	19		16.2		4
	18	18				21	23	20		17		
	20	20			10~160	24	26		M20	19		
	20A							24	M16			
	22	22				26	28		M20	21	1.35	
	22A								M16		0 -0.210	
	25	25	-0.007 -0.020			29	31	27	M20	23.9		5
	25A								M16			
	30	30				34	36	32	M20	28.6	1.65	
	30A								M16			



代码	技术说明	
YC	变更Y尺寸公差 	选型方法 YC ① 变更Y尺寸公差为±0.04
WC	变更为四面扳手槽 	选型方法 WC ① 六角型不适用
ME	附带挡圈 	选型方法 ME ① 规格3~8A: E形挡圈; 规格10~30A: C形挡圈




表1: 外螺纹退刀槽加工尺寸

螺纹直径 (M)	g	r	f
3			2.1~2.4
4	1.2~1.5	0.2~0.3	2.9~3.2
5			3.9~4.1
6			4.3~4.9
8	1.5~2.5	0.2~0.6	6.3~6.6
10			8.1~8.3
12			9.8~10.1
16	1.5~3.0	0.2~1.0	13.6~13.8
20	1.5~4.0		17.0~17.2



型号	规格	Dg6	Y	F	V
MDE01	3	-0.002 -0.008			5
MDE02	3A				9

MDE02-3-Y25-F30

① 可加工

型号	规格	Dg6	Y	F	可加工代码
MDE01	3	-0.002 -0.008			YC WC ME
MDE02	3A				

MDE02-3-Y25-F30-YC



● 优惠价

数量	1~9	10~
价格	100%	另行报价

未标价(元)



① 无表面处理



② 有表面处理

悬臂销

A5