


代码	材质	表面处理
AOB02	A6063-T6	碱砂氧化
AOH02	A6005-T6	
AOB05	A6063-T5	喷砂氧化

- ① 切断面未进行氧化处理。
- ② 最大使用长度：5800~5850mm；
整条标准长度：6000~6020mm。
- ③ 可定制表面处理。


□ L长度公差




□ 槽口详图

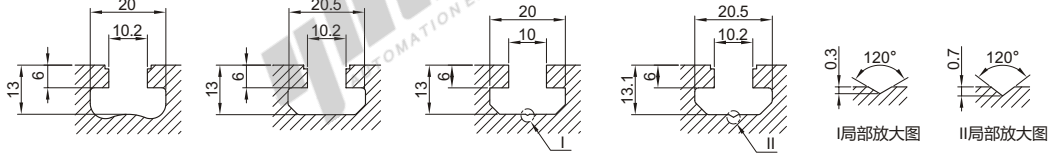


AOB02-H5050




AOH02-5050




AOB05-5050A




AOH02-6060




AOB05-6060A




AOB02-H6060E




AOB02-H6060F




AOB02-H50100

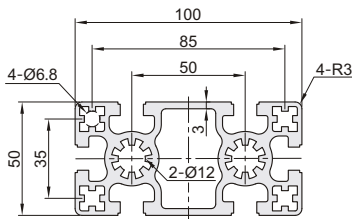

AOH02-50100



AOB02-H100100

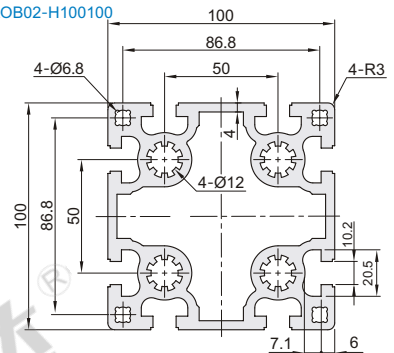

视角标准：第一视角

代码	型号	规格	最小单位0.5	截面尺寸	每米重量Kg/m (理论值)	截面积 (mm ²)	截面惯性矩		抗弯截面模数	
							I_x	I_y	$W_{x\max}(\text{mm}^3)$	$W_{y\max}(\text{mm}^3)$
AOB02	H5050		50~6000	50×50	2.98	1082.82	24.96×10^4	24.96×10^4	9983.52	9983.52
	H6060E			60×60	3.83	1391.19	47.63×10^4	47.64×10^4	15878.80	15878.80
	H6060F				4.37	1587.05	53.44×10^4	53.44×10^4	17811.97	17811.97
	H50100			50×100	5.05	1834.21	46.16×10^4	184.33×10^4	18465.04	36866.58
	H100100			100×100	9.44	3430.61	384.25×10^4	384.25×10^4	76849.20	76849.20
AOH02	5050			50×50	4.49	1632.02	38.18×10^4	38.18×10^4	15271.86	15271.86
	6060			60×60	7.08	2573.09	79.61×10^4	79.61×10^4	26536.33	26536.33
	50100			50×100	7.16	2603.64	68.23×10^4	274.15×10^4	34149.78	54830.96
AOB05	5050A			50×50	2.07	750.29	17.36×10^4	17.36×10^4	6943.72	6943.72
	6060A			60×60	2.48	900.04	33.41×10^4	33.41×10^4	11137.90	11137.90

① 可选加工见上页。

② 可选加工



请按图示订货

型号	规格	最小单位0.5	截面尺寸
AOB02	5050A	50~6000	50×50
AOB02	6060A	50~6000	60×60

AOB05—5050A—L1200

型号	规格	最小单位0.5	可选加工代码
AOB02	5050A	50~6000	LM
AOB02	6060A	50~6000	LM

AOB05—5050A—L1200—RM