
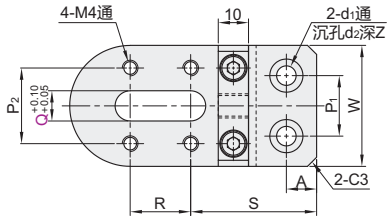


输送机惰轮安装座


侧面张紧型

小型输送机


代码	类型	材质		表面处理
		国标	相当	
KVB10	侧面张紧型	45	S45C	无电解镀锌
KVB11		LD30	A6061	本色阳极氧化
KVB12				黑色阳极氧化

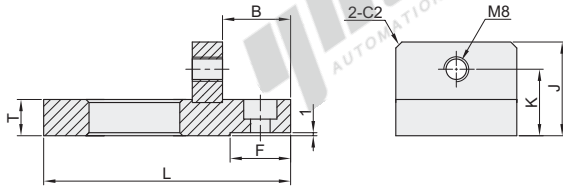

① 选用铝型材为规格4040时, 安装孔如下图



② 选用铝型材为规格4080时, 安装孔如下图



代码	型号 适用铝型材规格	Q	L	T	W	R	S	F	A	B	P ₁	P ₂	K	J	d ₁	d ₂	Z
KVB10	2040	10 12 13	90		40	15	55	20		34	20	25			5.5	9	5.5
	4040		120	13	50	20	80	55		59	-		23	32	9	14	9
KVB11	3050	13 15 16	100		60	20	60	20	10	38	30	30			6.5	11	6.5
	3060			50	20	60	20	10	38	30	40				6.5	11	6.5
KVB12	4080	15 16 18	145	15	80	35	85	45		59	40	50	25	34	9	14	9

④ 可选加工



代码	型号 适用铝型材规格	Q
KVB10	2040	10 12 13
KVB11	4040	

KVB10—2040—Q10

代码	型号 适用铝型材规格	Q	可选加工 代码
KVB10	2040	10 12 13	RC
KVB11	4040		

KVB10—2040—Q10—RC



代码	技术说明	
RC	增加张紧部刻度尺	选型方法 RC



优惠价	
数量	1~10 11~
价格	100% 另行报价

未税价(元)



交货期
10

