



超轻载型 ▶ 拉伸弹簧

代码	类型			材质		挂钩相对角度
				国标	相当	
Y-YAUA	超轻载型	半圆形单挂钩	标准型	0Cr18Ni9	SUS304-WPB	180°

① 弹簧两端挂钩保持水平或者垂直状态，无法保证挂钩开口方向每批次都一致，不影响使用。

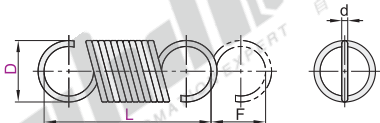

视角标准：第一视角

型号		线径 d	动态负载时		初始 张力 (N)	弹簧 常数 N/mm
代码	D		最大 位移量 Fmax	最大 载荷 N		
Y-YAUA	2	10	6.7	0.69	0.13	0.083
		15	11.8			0.047
		20	17.2			0.032
		25	22.8			0.025
		30	28.5			0.02
		10	10.4			0.11
	3	15	23	1.27	0.15	0.049
		20	35.9			0.031
		25	47.9			0.024
		30	57.5			0.02
		15	14.6			0.14
		20	24.1			0.083
	4	25	32.5	2.26	0.25	0.062
		30	42.7			0.047
		35	51.2			0.039
		40	60.3			0.033
		15	8.2			0.33
		20	15.5			0.18
	5	25	21.5	3.24	0.49	0.13
		30	29.4			0.093
		35	35			0.078
		40	43			0.064
		45	50.9			0.054
		50	56			0.049
	6	20	16.2	6.08	0.64	0.34
		25	25.2			0.22
		30	34.7			0.16
		35	42.7			0.13
		40	50.4			0.11
		45	61.6			0.088
		50	69.3			0.079
		55	79.3			0.069
		60	85.3			0.064

型号		线径 d	动态负载时		初始 张力 (N)	弹簧 常数 N/mm
代码	D		最大 位移量 Fmax	最大 载荷 N		
Y-YAUA	8	25	18.1	8.53	1.08	0.41
		30	27.1			0.28
		35	36.2			0.21
		40	44.7			0.17
		45	54.2			0.14
		50	63.3			0.12
		55	69	10.8	2.06	0.11
		60	80			0.093
		65	89.4			0.083
		70	95			0.078
		30	13.4			0.65
		35	18.5			0.47
	10	40	24	19.6	2.94	0.36
		45	29.6			0.29
		50	35.6			0.25
		55	42.3			0.21
		60	46.8			0.19
		70	59.3			0.15
	12	80	68.4			0.13
		90	80.9			0.11
		100	93.6			0.093
		35	17.8			0.94
		40	25			0.67
		45	31			0.54
		50	37.7			0.44
		55	44.7			0.37
		60	51.5			0.32
		70	65.3			0.26
		80	77.2			0.22
		90	94.4			0.18
		100	106.2			0.16

① 初始张力:弹簧常数为参考值。负载(kgf)=负载N×0.101972



请按图示订货

型号		线径d
代码	D	
Y-YAUA	2	0.2
	15	

Y-YAUA—D2—L10



未税价(元)

● 优惠价
数量 1~19 20~
价格 100% 另行报价