

方形丝杠支座组件

固定侧·日本轴承 低肩型 精密型






代码	类型	固定侧	材质		表面处理
			① ③ ⑥	④	① ③ ④ ⑥
J-LEB21	精密型	固定侧	S45C	SUJ2	发黑



- ① ② ③ 为一体，请勿拆解，否则将影响精度。
- ① 轴承已经封入适量锂皂基抗极压润滑脂。
- ① 使用经预压调整后的JIS 5级的角接触球轴承、最适用于高精度、高速旋转用途。

构成零件



编号	零件名称	数量
①	轴承座本体	1
②	日本角接触轴承 5级	1对
③	轴承盖	1
④	间隔环	2
⑤	油封(Ø4~5无油封, Ø6~8 1个)	2
⑥	支座用螺母	1
⑦	内六角紧定螺丝附铜片	2

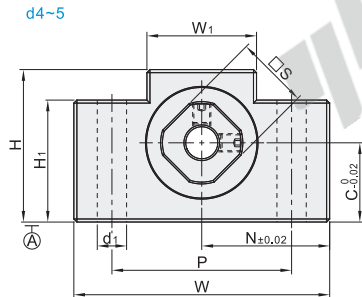

d10~20

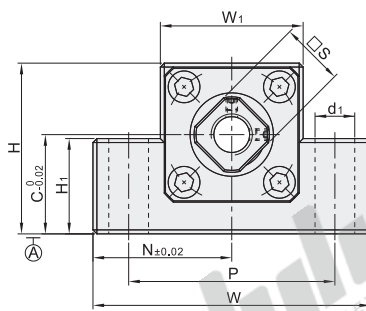

建议轴端加工尺寸

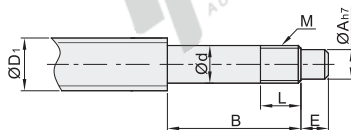

型号		建议轴端加工尺寸															
代码	规格	Ød	T	T ₁	T ₂	T ₃	W	H	C	W ₁	H ₁	P	N	Ød ₁	Ød ₂	t	S
J-LEB21	4	4	15		18.5	2	34	19	10	18	7	26	17	4.5	—	—	10
	5	5	16.5	5.5	19.5	2.5	36	21	11	20	8	28	18	5.5	9.5	11	12
	6	6	20		22	3.5	42	25	13	18	20	30	21	6.6	11	12	14
	8S	8	23	7	26	4	52	32	17	25	26	38	26	6.6	11	12	14
	10	10			29.5	6	70	43	25	36	24	52	35	9			16
	12	12		6													19
	15S	15	25		36												22
	15	15	25		32	5	80	49	30	41	25	60	40	11			22
	15B	15	25		36												22
	20	20	42	10	50	10	95	58	30	56		75	47.5				30
		油封适用轴径Ød ₄	搭板丝杠轴径ØD ₁	轴端部外径Ød	轴端部加工尺寸	公称螺纹	间隔环长度										
		ØD ₁	Ød	ØA	B	E	M	L	T ₄								
J-LEB21	4	4	4	3	18	5	M4×P0.5	6.5	3.5								
	5	5	5	4	19	6	M5×P0.5	8	4.5								
	6	6	6	4	28	8	M6×P0.75	8	5								
	8S	8	8	6	32	9	M8×P1.0	10									
	10	10	10	8	36	15	M10×P1.0	11									
	12	12	12	10			M12×P1.0										
	15S	15	15	12													
	15	15	15	12													
	15B	15	15	12													
	20	20	20	17	62	25	M20×P1.0	17	11								



型号	代码	规格	Ød
J-LEB21	4	6	8
J-LEB21	—	6	8



优惠价	数量	1~4	5~
价格	100%	另行报价	



交货期

7