

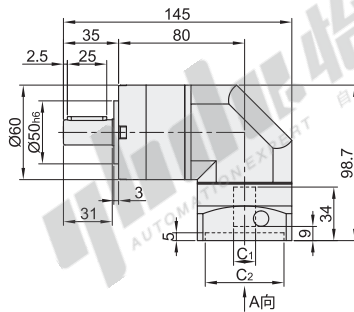


经济型 转角行星减速机




单支撑 · 直齿 · 单段
方法兰 标准背隙

代码	类型	
ZJU33	直齿	单段




法兰尺寸: 60



法兰尺寸: 90

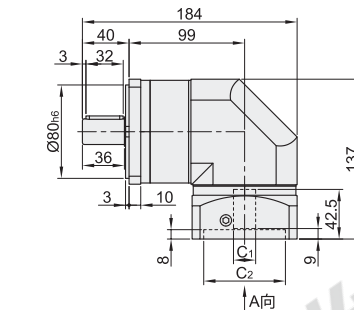

法兰尺寸: 120

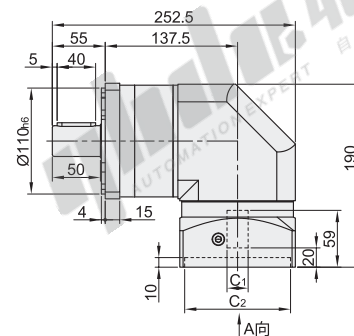

型号		段数	减速比	背隙	安装尺寸 代号	电机连接板尺寸/安装尺寸			
代码	法兰尺寸					C ₁	C ₂	C ₃	C ₄
ZJU33	60	1 (单段)	3 4 5 7 10	P2 (标准背隙)	T1	14	50	70	M4
					T2	11			
					T3	8	38.1	66.7	
					T4	14	50	70	
	T1				73		98.4	M5	
	T2				19	70	90		M6
	T3								
	T1				22	110	145	M8	
	T2				24				
	T3								
	T4				19				95

性能参数表

规格	单位	减速比	法兰尺寸		
			60	90	120
额定输出扭矩	Nm	3	25	80	150
		4	40	96	210
		5	39	96	230
		7	12	80	200
		10	11	50	130
最大输出扭矩	Nm	3	26	200	375
		4	36	240	525
		5	34	245	575
		7	24	200	500
		10	22	125	325
传递效率	%	3~10	95		
平均使用寿命	h	3~10	20000		
工作温度	°C	3~10	-10~+90		
防护等级	—	3~10	IP65		
安装方向	—	3~10	任意		
标准背隙P2	arcmin	3~10	≤15		
额定输入转速	rpm	3~10	3000		
最大输入转速	rpm	3~10	5000		
最大容许径向力	N	3~10	220		
最大容许轴向力	N	3~10	200		
噪音值	dB	3~10	≤65±2	≤75±2	



型号		段数	减速比	背隙	安装尺寸 代号
代码	法兰尺寸				
ZJU33	60	1	3 4 5 7 10	P2	T1
	90				T2

ZJU33-60-1-3-P2-T1