


精密垫片（矽钢片）

卷装

代码	类型	销售方式	材质	硬度
UEN01	进口	卷装	高碳钢SK	480~520HV
UEN06			不锈钢SUS304H	370~420HV
UEN08	国产			

特点：尺寸稳定、边角倒圆处理不伤手。

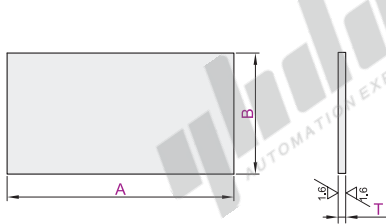

T公差表

T	公差
0.005	±0.001
0.01~0.03	±0.002
0.04~0.06	±0.003
0.07~0.12	±0.004
0.15~0.18	±0.005
0.20~0.22	±0.006
0.25~0.30	±0.007
0.35	±0.008
0.40~0.45	±0.009
0.50	±0.010



视角标准：第一视角

高碳钢SK

型号	T	B	A
代码			
0.005			
0.01			
0.02			
0.03			
0.04			
0.05			
0.06			
0.07			
0.08			
0.09	12.7	1000	
0.10		5000	
0.15			
0.20			
0.25			
0.30			
0.35			
0.40			
0.45			
0.50			
0.005			
0.01			
0.02			
0.03			
0.04			
0.05			
0.06			
0.07			
0.08			
0.09	25	1000	
0.10		5000	
0.15			
0.20			
0.25			
0.30			
0.35			
0.40			
0.45			
0.50			
0.005			
0.01			
0.02			
0.03			
0.04			
0.05			
0.06			
0.07			
0.08			
0.09	50	1000	
0.10		5000	
0.15			
0.20			
0.25			
0.30			
0.35			
0.40			
0.45			
0.50			

进口
UEN01

不锈钢SUS304H

型号	T	B	A
代码			
0.005*			
0.01*			
0.015*			
0.02			
0.03			
0.04*			
0.05			
0.06*			
0.07*			
0.08*			
0.09*	12.7	1000	
0.10		5000	
0.15*			
0.20			
0.25*			
0.30			
0.35*			
0.40*			
0.45*			
0.50			
0.005*			
0.01*			
0.015*			
0.02			
0.03			
0.04*			
0.05			
0.06*			
0.07*			
0.08*			
0.09*	25	1000	
0.10		5000	
0.15*			
0.20			
0.25*			
0.30			
0.35*			
0.40*			
0.45*			
0.50			
0.005*			
0.01*			
0.015*			
0.02			
0.03			
0.04*			
0.05			
0.06*			
0.07*			
0.08*			
0.09*			
0.10			
0.15*			
0.20			
0.25*			
0.30			
0.35*			
0.40*			
0.45*			
0.50			
0.005*			
0.01*			
0.015*			
0.02			
0.03			
0.04*			
0.05			
0.06*			
0.07*			
0.08*			
0.09*	50	1000	
0.10		5000	
0.15*			
0.20			
0.25*			
0.30			
0.35*			
0.40*			
0.45*			
0.50			

进口
UEN06
国产
UEN08

不锈钢SUS304H

型号	T	B	A
代码			
0.005			
0.01			
0.015			
0.02			
0.03			
0.04			
0.05			
0.06			
0.07			
0.08			
0.09	100	1000	
0.10		1500	
0.15		5000	
0.20			
0.25			
0.30			
0.35			
0.40			
0.45			
0.50			

高碳钢SK

型号	T	B	A
代码			
0.005			
UEN01 0.01			
0.02			

请按图示订货

UEN01—T0.005—B12.7—A1000



优惠价

数量	1~9	10~
价格	100%	另行报价

未标价(元)



交货期
5

带*号厚度T0.005、T0.01、T0.015、T0.04、T0.06、T0.07、T0.08、T0.09、T0.15、T0.25、T0.35、T0.40、T0.45不适用UEN08。