


■ 双侧型球头定位珠

代码	类型	材质	
		主体	球头
ZAV01	双侧型球头定位珠	黄铜	SUS420C



代码	型号	D	d	D ₁	L	H	负载(N)	
							Min.	Max.
ZAV01		2.5	2	2.52	5.3	0.65	1.3	2.5
		3	2.5	3.02	7.3	0.8	2	4.5
		4	3	4.03	9	0.9	2.5	7.5
		5	4	5.03	10.8	1.2	3.5	8
		6	5	6.03	12.6	1.6	3.5	10.5
		7	6	7.03	14	2	4	12
	8	6.5	8.03	18	2.1	6	16	

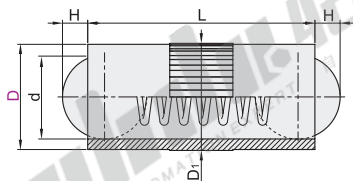


型号	
代码	D
ZAV01	2.5
	3


ZAV01 - D2.5




数量	1~9	10~
价格	100%	另行报价



① 借助一定压力的弹簧双向推动球体的运动，起到定位作用。







② 最小载荷(初始载荷)表示两侧球中某一方刚开始下沉时的载荷。



③ 最大载荷表示两侧球下沉到底时的载荷。

■ 侧向螺纹型定位销

代码	类型	橡胶封口	载荷	材质			表面处理		颜色
				本体	销子	弹簧	本体	销子	
ZAV71	侧向螺纹型定位销	无	轻载	SCM435	POM	SUS304-WPB	镀锌	镀锌	本色
ZAV72					1215				
ZAV73			超重载		SWP-B				
ZAV74									



代码	型号	D	L	H	M×螺距	S	A 可动范围	M ₁ ×螺距 安装孔	负载(N)		
									ZAV71/72轻载	ZAV73重载	ZAV74超重载
ZAV71 ZAV72 ZAV73 ZAV74	5	6.4	11.5	10.4	M12×1.75	10	1.6	M12×1.75	20	50	100
			19								
			26.5								
	6	10.4	11.5	16.9	M18×1.5	16	3.2	M18×1.5	40	75	200
			19								
			26.5								
10	16.9	31.5									
		45									



型号	
代码	D
ZAV71	5
ZAV72	6
	19

ZAV71 - D5 - L11.5



数量	1~50	51~
价格	100%	另行报价

