





代码	类型	定位精度(间隙)	材质	硬度
PDC41	标准型	0.005~0.015	SKD11	58~62HRC



T16/20




T25



T30~50

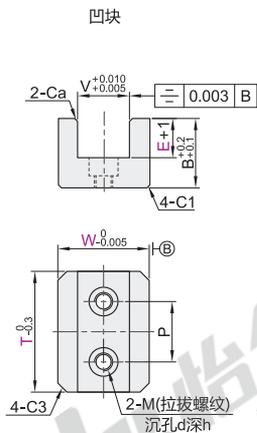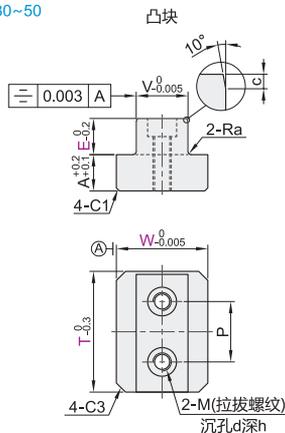

装配图




型号 代码	W	T	E	V	H	A	B	c	Ra	Ca	螺栓孔				安装 螺栓	螺栓孔 数量
											P	M	d	h		
PDC41	16	16	8	9	26	10	17	1	0.5	0.5	15	M4	6.5	3.5	M4	1
		12	30		21											
		8	26	17	21											
	20	25	8	12	26	12	21	1	0.5	0.5	15	M4	6.5	3.5	M3	2
		12	30		21											
		8	26	17	21											
	25	25	10	15	32	10	26	2	1	1	15	M5	8	5	M4	1
		15	37		21											
		10	32	21	1	0.5	0.5									
	30	30	15	17	37	12	26	2	1	1	15	M6	9.5	6	M5	2
		12	36		23											
		20	36	23	1	0.5	0.5									
35	40	20	20	44	12	31	2	1	1	20	M8	11	7	M6	2	
	12	36		23												1
	20	44	31	2	1	1										
50	40	15	20	41	12	28	2	1	1	20	M8	11	7	M6	2	
	25	51		28												2
	15	41	28	2	1	1										

有效定位量

E	S(max) (有效定位量)
8	5.5
10	7.5
12	9.5
15	11
20	16
25	21

注意事项:

使用时需保留1mm左右的端面间隙, 以防止合模时凸块和凹块的端面发生碰撞, 造成破损。



请按图示订货

型号			
代码	W	T	E
PDC41	30	30	12
			20

PDC41—W30—T30—E20



未税价(元)

优惠价	
数量	1~5 6~
价格	100% 另行报价



交货期

12