


标准法兰型
无挡圈型


经济型带座轴承

类型			材质		表面处理
圆法兰	方法兰	对边法兰	轴承	轴承座	轴承座
E-BFF51	E-BFF61	E-BFF71	钢	S45C	发黑
E-BFF52	E-BFF62	E-BFF72			无电解镀镍
E-BFF53	E-BFF63	E-BFF73			本色阳极氧化(哑光)
E-BFF54	E-BFF64	E-BFF74	不锈钢	SUS304	—
E-BFF56	E-BFF66	E-BFF76			



① 由于产品批次不同, 发货镀镍产品可能存在喷细砂, 不影响尺寸及功能。

轴承精度: GB/T 307.1 0 级
相当于: JIS B 1514 0 级

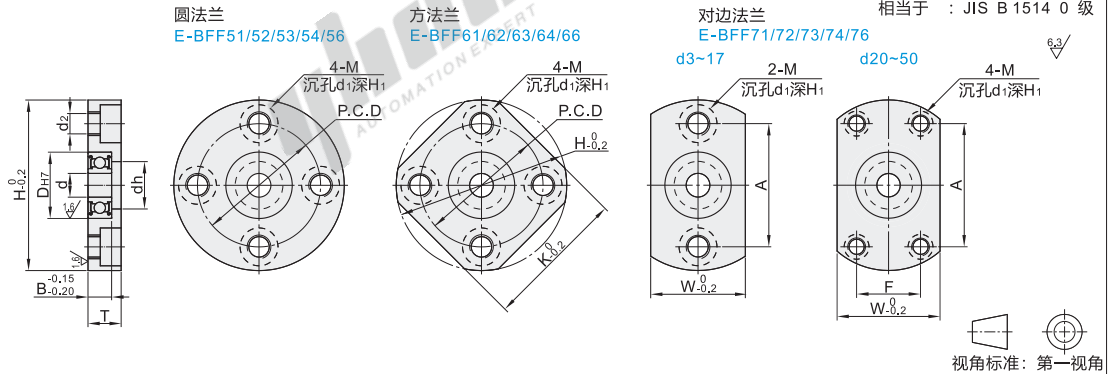

视角标准: 第一视角

代码	型号	轴承型号	密封圈	d	D _{H7}	B	H	W	T	dh	P.C.D	K	A	F	M(粗牙螺纹) (d ₂)	d ₁	H ₁
圆法兰 E-BFF51 E-BFF52 E-BFF53 E-BFF54 E-BFF56	623			3	10	^{+0.015} ₀	4	33	16	6	7	24	27	24	M4 (3.3)	6.5	3.6
	624			4	13			35	18		9	28	31				
	605			5	14	^{+0.018} ₀	5	36	20	7	10	26	30	26			
	625				16			38	22		12	28	31	28			
	606			6	17		6	39	23	8	13	29	32	29	M5 (4.3)	8	4.6
	626				19	^{+0.021} ₀		41	25		15	31	34	31			
	678			12	12		3.5	34	18	6	10	25	27	25			
	698			19	19		6	41	25	8	15	31	34	31			
	608			8	22	^{+0.021} ₀	7	45	29	9	18	35	36	35	M4 (3.3)	6.5	3.6
	628				24		8	47	32	10	20	37	37	37			
	6700			15	^{+0.018} ₀	4	37	22		7.5	12	27	30	27			
	6800			19		5	41	25			15	31	34	31			
	6900			22	^{+0.021} ₀	6	45	29	8	19	35	36	35				
	6000			26		8	50	34	10	22	40	39	40				
	6200			30		9	54	38	11	24	44	42	44				
	6701			18	^{+0.018} ₀	4	40	25		7.5	15	30	31	30	M5 (4.3)	8	4.6
	6801			21		5	44	29			17	34	35	34			
	6901			24	^{+0.021} ₀	6	48	31	8	21	38	38	38				
	6001			28		8	52	36	10	24	42	40	42				
	6201		ZZ (双盖式)	32	^{+0.025} ₀	10	56	40	12	26	46	43	46				
	6702			21		4	44	29		7.5	18	34	35	34			
	6802		※VV	24	^{+0.021} ₀	5	47	32			20	37	37	37			
	6902		(非接触式	15		7	57	37	9	25	45	45	45				
	6002		橡胶密封圈)	32		9	60	40	11	28	48	46	48		M6 (5.2)	9.5	5.6
	6202			35	^{+0.025} ₀	11	64	44	13	29	52	49	52				
方法兰 E-BFF61 E-BFF62 E-BFF63 E-BFF64 E-BFF66	6803		DD	26	^{+0.021} ₀	5	50	34	7.5	22	40	39	40		M5 (4.3)	8	4.6
	6903		(接触式	17		7	60	38	9	27	48	46	48		M6 (5.2)	9.5	5.6
	6003		橡胶密封圈)	35	^{+0.025} ₀	10	66	44	12	31	54	50	54				
	6203			40		12	72	50	14	34	60	54	60				
	6704			27	^{+0.021} ₀	4	51	35	7.5	23	41	39	32	25	M5 (4.3)	8	4.6
	6804			32		7	60	40	9	28	48	46	38	29	M6 (5.2)	9.5	5.6
	6904			20		9	69	47	11	34	56	54	51	24			
	6004			42		12	77	54	14	36	64	59	56	32			
	6204			47	^{+0.025} ₀	14	81	58	16	40	68	62	59	34	M8 (6.8)	11	6.6
	6805			37		7	69	47	11	34	56	54	51	24			
	6905			42		9	77	54		36	64	59	56	32			
	6005			47		12	88	58	14	41	72	67	63	36	M10 (8.5)	14	8.8
	6205			52	^{+0.030} ₀	15	94	64	17	45	78	72	68	39			
	6806			42	^{+0.025} ₀	7	77	54	11	36	64	59	56	32	M8 (6.8)	11	6.7
	6906			47		9	88	58	13	41	72	67	63	36			
	6006			55		13	96	66	15	48	80	73	70	40	M10 (8.5)	14	8.8
	6206			62		16											
	6007			62		14	104	74		16	55	88	79	75	44		
	6207			35	^{+0.030} ₀	17	126	88	21	64	105	95	92	51	M12 (10.5)	17.5	11.2
	6008			68		15	114	82	17	60	96	85	80	54	M10 (8.5)	14	8.8
	6208					18				22							
	6010			80		16	134	96		20	74	113			M12 (10.5)	17.5	11.2
	6210		ZZ (双盖式)	50	^{+0.035} ₀	20	147	110	24	83	126			104	72		

※ VV(非接触式橡胶密封圈)不适用于型号为67开始的型号及623、624、605、606的轴承。

※ VV(非接触式橡胶密封圈)、DD(接触式橡胶密封圈)、轴承材质为钢。

可选加工

代码	轴承型号	密封圈	可选加工代码
E-BFF61	6802	ZZ	
E-BFF62	6902	DD	NA



优惠价
数量 1~9 10~
价格 100% 另行报价

未税价(元)
交货期
5



可选加工	不装配轴承、挡圈
代码	NA
技术说明	不装配轴承及挡圈 (附带出货)



型号
代码 轴承型号 密封圈
E-BFF61 6802 ZZ
E-BFF62 6902 DD

E-BFF62 — 6902DD NA