


代码	类型	材质	表面处理	焊接方式
ZIP22	裸压着端子 叉形	紫铜	镀锡	接缝焊银

特点

- 电解铜镀锡，导电性良好；
- 无缝焊接使导体和端子间具有良好的接触性和拉伸强度。

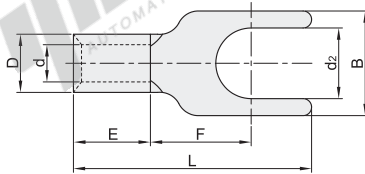

销售方式	每袋数量
袋	见参数表



型号	压接规格	螺丝规格	适用电线规格		外形尺寸(mm)								最大电流 I <sub>max</sub>	包装 (PCS/袋)	适用压接 工具	
			截面积(mm <sup>2</sup> )	AWG	d <sub>2</sub>	B	F	L	E	D	d	T				
ZIP22	1.25	3	0.5~1.5	22~16	3.2	5.7								19A	1000	ZIQ07-8 (见官网)
		3.5			3.7											
		3.5L			6.4											
		4														
		4M			4.3	7.2	6.5	16								
		4L							4.8	3.4	1.8	0.7				
		5			5.3											
		5L														
	6S	6.4														
	6L					12	11	22								
	8S	8.4														
	2	3	1.5~2.5	16~14	3.2	5.7								27A	1000	ZIQ07-8 (见官网)
		3.5			3.7											
		3.5L			6											
		4			6.4											
		4M			4.3	7.2	6.5	16								
		4L							4.8	4	2.4	0.8				
		5			5.3											
		5L														
	6S	6.4														
	6L					12	11	22								
	3.5	4	2.5~4	14~12	4.3	8	7.7	18.3						37A	1000	—
		5			5.3											
		6			6.4	12	9.1	21.5								
10		10.5			17.5	12.5	26.5									
5.5	3.5	4~6	12~10	3.7	8.3								48A	1000	ZIQ07-8 (见官网)	
	4															
	4L			4.3		7	18.5									
	5			5.3	9			6	5.5	3.5	1					
	6S			6.4												
	6							12	12	24.7						
	8			8.4	14	11.5	23.7									
	4			4.3	9	7.6	20.8									
8	5	6~10	8	5.3						8.5	7.2	4.8	1.2	62A	500	
	6			6.4	12	9.2	23.8									
	4			4.3												
14	5	10~16	6	5.3	11	9.5	25.5	10.5	9	6	1.4	88A	500	—		
	6			6.4												
	4			4.3												
22	5	16~25	4	5.3	11	9.5	27.8						115A	250	—	
	6			6.4												
	8			8.4	16.5	13.5	33.5									

压着端子



型号		螺丝规格
代码	压接规格	
ZIP22	1.25	3
		3.5

ZIP22 - 1.25 - 3