


电缆固定架/拖链支撑板

电缆固定架

| 代码 | 类型 | 材质 | 颜色 | 允许温度 | 阻燃等级 |
|-------|-------|------|----|-------------|---------|
| VHS01 | 电缆固定架 | 工程塑料 | 黑色 | -40°C~125°C | UL94-V0 |

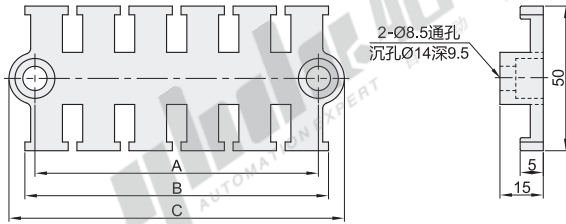

| 型号 | | 梳齿数 | A | B | C |
|-------|-----|-----|-----|-----|-----|
| 代码 | 规格 | | | | |
| VHS01 | 50 | 4 | 58 | 65 | 78 |
| | 75 | 5 | 75 | 82 | 93 |
| | 100 | 6 | 98 | 105 | 116 |
| | 125 | 7 | 122 | 130 | 139 |
| | 150 | 8 | 141 | 148 | 158 |



| 型号 | | 梳齿数 |
|-------|----|-----|
| 代码 | 规格 | |
| VHS01 | 50 | 4 |
| | 75 | 5 |

VHS01-50




| 优惠价 | | |
|-----|------|------|
| 数量 | 1~9 | 10~ |
| 价格 | 100% | 另行报价 |



拖链支撑板

| 代码 | 类型 | 材质 | 表面处理 |
|-------|-----|----|---------------|
| VHA51 | 正装型 | U型 | A6063-T5 喷砂氧化 |

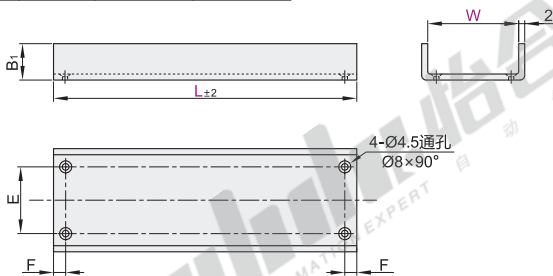

| 型号 | | L | | | | | | | | B ₁ | E | F | |
|-------|----|-----|-----|-----|-----|-----|-----|-----|-----|----------------|----|----|----|
| 代码 | W | 200 | 300 | 400 | 500 | 600 | 700 | 800 | 900 | 1000 | | | |
| VHA51 | 50 | | | | | | | | | | 15 | 25 | 20 |
| | 80 | | | | | | | | | | 20 | 50 | |



| 型号 | | |
|-------|----|---------|
| 代码 | W | L |
| VHA51 | 50 | 200 300 |
| | 80 | 300 |

VHA51-W50-L200

可选加工

| 型号 | | | 可选加工代码 |
|-------|----|---------|--------|
| 代码 | W | L | |
| VHA51 | 50 | 200 300 | KN() |
| | 80 | 300 | |

VHA51-W50-L200-KN3-X15-G10-Y12-S15-M4



| 优惠价 | | |
|-----|------|------|
| 数量 | 1~9 | 10~ |
| 价格 | 100% | 另行报价 |



| 代码 | 增加安装螺纹孔(3螺孔、4螺孔可选) | | | | |
|--------|-----------------------------|------|---------|---------|-------|
| | KN() | | | | |
| 技术说明 | 选型方法 KN3-X15-G10-Y12-S15-M4 | | | | |
| | 最小单位1 | | | | |
| KN=3时: | G() | | X() | | M() |
| | Y() | | S() | | |
| KN=4时: | G() | | X() | | M() |
| | Y() | | S() | | |
| KN | X | G | Y | S | M |
| 3 | 30~45 | 8~30 | 6<Y<W/2 | 6<S<W/2 | 3 4 5 |
| 4 | | | | | |

