



代码	类型	主体材质	表面处理	附件
DEE03	螺钉固定型	铝合金	本色阳极氧化	内六角紧定螺钉
DEE13	螺钉夹紧型	铝合金	本色阳极氧化	内六角圆柱头螺钉

- 特点
- 采用高强度铝合金一体加工成型，平行式切割，有良好的柔性。
 - 顺时针和逆时针回转特性完全一样。
 - 能补偿径向、角向、轴向偏差。
 - 零回转间隙。

螺钉固定型
DEE03

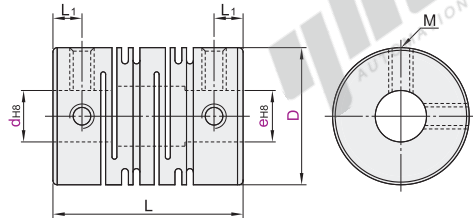

螺钉夹紧型
DEE13

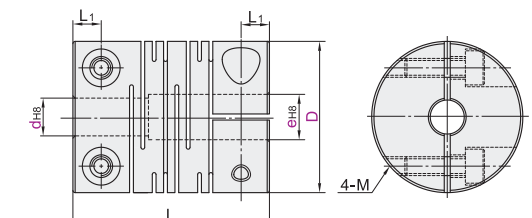

① 因偏心、偏角、轴向的位移如果同时出现多种偏差时，则各容许值会降低。 ② 由于制作工艺原因，表面可能会有痕迹。

视角标准：第一视角

型号	D	d-e																											
螺钉固定型 DEE03	12	d	3		4		4.5		5		6																		
		e	3 4 4.5 5 6		4 4.5 5 6		4.5 5 6		5 6		6																		
	16	d	3			4			4.5			5		6		6.35		7		8									
		e	3 4 4.5 5 6 6.35 7 8			4 4.5 5 6 6.35 7 8			4.5 5 6 6.35 7 8			5 6 6.35 7 8		6 6.35 7 8		6.35 7 8		7 8		8									
	20	d	4			5			6			6.35			7		8		9		9.525		10						
		e	4 5 6 6.35 7 8 9 9.525 10			5 6 6.35 7 8 9 9.525 10			6 6.35 7 8 9 9.525 10			6.35 7 8 9 9.525 10			7 8 9 9.525 10		8 9 9.525 10		9 9.525 10		9.525 10		10						
	25	d	5			6			6.35			7		8		9		9.525		10		11		12					
		e	5 6 6.35 7 8 9 9.525 10 11 12			6 6.35 7 8 9 9.525 10 11 12			6.35 7 8 9 9.525 10 11 12			7 8 9 9.525 10 11 12		8 9 9.525 10 11 12		9 9.525 10 11 12		9.525 10 11 12		10 11 12		11 12		12					
	32	d	8			9			9.525			10		11		12		12.7		13		14		15		16			
		e	8 9 9.525 10 11 12 12.7 13 14 15 16			9 9.525 10 11 12 12.7 13 14 15 16			9.525 10 11 12 12.7 13 14 15 16			10 11 12 12.7 13 14 15 16		11 12 12.7 13 14 15 16		12 12.7 13 13 14 15 16		12.7 13 14 14 15 16		13 14 15 16		14 15 16		15 16 17		16			
	40	d	8			9.525			10			11		12		12.7		13		14		15		16		17		18	
		e	8 9.525 10 11 12 12.7 13 14 15 16 17 18			9.525 10 11 12 12.7 13 14 15 16 17 18			10 11 12 12.7 13 14 15 16 17 18			11 12 12.7 13 14 15 16 17 18		12 12.7 13 14 15 16 17 18		12.7 13 14 15 16 17 18		13 14 15 16 17 18		14 15 16 17 18		15 16 17 18		16 17 18		17 18 19			
	50	d	12			12.7			13			14		15		16		17		18		19		20					
		e	12 12.7 13 14 15 16 17 18 19 20			12.7 13 14 15 16 17 18 19 20			13 14 15 16 17 18 19 20			14 15 16 17 18 19 20		15 16 17 18 19 20		16 17 18 19 20		17 18 19 20		18 19 20		19 20 21		20 21 22					
	63	d	14			15			16			17		18		19		20		22		24							
		e	14 15 16 17 18 19 20 22 24			15 16 17 18 19 20 22 24			16 17 18 19 20 22 24			17 18 19 20 22 24		18 19 20 22 24		19 20 22 24		20 22 24		22 24 25		24 25 26							
螺钉夹紧型 DEE13	12	d	3		4		4.5		5																				
		e	3 4 4.5 5		4 4.5 5		4.5 5		5																				
	16	d	3		4		4.5		5		6																		
		e	3 4 4.5 5 6		4 4.5 5 6		4.5 5 6		5 6		6																		
	20	d	4			5			6		6.35		7		8														
		e	4 5 6 6.35 7 8			5 6 6.35 7 8			6 6.35 7 8		6.35 7 8		7 8		8														
	25	d	5			6			6.35			7		8		9		9.525		10									
		e	5 6 6.35 7 8 9 9.525 10			6 6.35 7 8 9 9.525 10			6.35 7 8 9 9.525 10			7 8 9 9.525 10		8 9 9.525 10		9 9.525 10		9.525 10		10									
	32	d	8			9			9.525			10		11		12		12.7		13		14							
		e	8 9 9.525 10 11 12 12.7 13 14			9 9.525 10 11 12 12.7 13 14			9.525 10 11 12 12.7 13 14			10 11 12 12.7 13 14		11 12 12.7 13 14		12 12.7 13 14		12.7 13 14		13 14		14							
	40	d	8			10			11			12		12.7		13		14		15		16		17		18			
		e	8 10 11 12 12.7 13 14 15 16 17 18			10 11 12 12.7 13 14 15 16 17 18			11 12 12.7 13 14 15 16 17 18			12 12.7 13 14 15 16 17 18		12.7 13 14 15 16 17 18		13 14 15 16 17 18		14 15 16 17 18		15 16 17 18		16 17 18		17 18 19					
	50	d	12			12.7			13			14		15		16		17		18		19		20					
		e	12 12.7 13 14 15 16 17 18 19 20			12.7 13 14 15 16 17 18 19 20			13 14 15 16 17 18 19 20			14 15 16 17 18 19 20		15 16 17 18 19 20		16 17 18 19 20		17 18 19 20		18 19 20		19 20 21		20 21 22					
	63	d	14			15			16			17		18		19		20		22		24							
		e	14 15 16 17 18 19 20 22 24			15 16 17 18 19 20 22 24			16 17 18 19 20 22 24			17 18 19 20 22 24		18 19 20 22 24		19 20 22 24		20 22 24		22 24 25		24 25 26							

经济型平行线式联轴器

- 螺钉固定型
- 螺钉夹紧型
- 铝合金

型号		L	L ₁	M	锁紧扭矩 (N·m)	额定扭矩 (N·m)	最大扭矩 (N·m)	最高转速 (r/min)	惯性力矩 (kg·m ²)	静态扭转刚性 (N·m/rad)	容许安装偏差			重量(g)
代码	D										径向(mm)	角向(°)	轴向(mm)	
螺钉固定型 DEE03	12	18.5	2.5	M2.5	0.5	0.4	0.8	52000	8.3×10 ⁻⁸	45	0.10		±0.2	3.7
	16	23	3	M3	0.7	0.5	1	39000	3.3×10 ⁻⁷	80				8.1
	20	26				1	2	31000	8.9×10 ⁻⁷	170				14
	25	31	4	M4	1.7	2	4	25000	2.6×10 ⁻⁶	380	0.15	2	±0.4	27
	32	41	6			4	8	19000	9.6×10 ⁻⁶	500				60
	40	56	8.5	M5	4	8	16	15000	3.2×10 ⁻⁵	700				130
	50	71	10.5	M6	7	13	26	12000	9.0×10 ⁻⁵	1800	0.20		±0.5	266
	63	90	13	M8	15	22	44	10000	3.0×10 ⁻⁴	3100				500
螺钉夹紧型 DEE13	12	18.5	2.5	M2	0.5	0.4	0.8	52000	7.8×10 ⁻⁸	45	0.10		±0.2	3.6
	16	23	3.25	M2.5		0.5	1	39000	3.4×10 ⁻⁷	80				9.2
	20	26	3.75		1	1	2	31000	9.1×10 ⁻⁷	170				16
	25	31	4.25	M3	1.5	2	4	25000	2.6×10 ⁻⁶	380	0.15	2	±0.4	28
	32	41	6	M4	2.5	4	8	19000	9.7×10 ⁻⁶	500				64
	40	56	8.5	M5	7	8	16	15000	3.3×10 ⁻⁵	700				140
	50	71	10.5	M6	12	13	26	12000	9.0×10 ⁻⁵	1800	0.20		±0.5	272
	63	90	13	M8	16	22	44	10000	3.1×10 ⁻⁴	3100				530

① 惯性力矩和重量按最大孔径计算。



请按图示订货

型号		d-e	
代码	D	d	e
DEE03	12	3	4 5 6

DEE03—D12—d3—e4

可选加工

型号		d-e		可选加工代码
代码	D	d	e	
DEE03	12	3	3 4 4.5 5 6	④ ⑤

DEE03—D12—dh3.1—eh4.5



未税价(元)

优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

3



可选加工

可选加工	变更d/e孔径																		
代码	dh() eh()																		
技术说明																			
	<table><tr><th>D</th><th>dh-eh</th></tr><tr><td>12</td><td>3~5</td></tr><tr><td>16</td><td>3~6</td></tr><tr><td>20</td><td>4~8</td></tr><tr><td>25</td><td>5~12</td></tr><tr><td>32</td><td>8~16</td></tr><tr><td>40</td><td>10~18</td></tr><tr><td>50</td><td>12~20</td></tr><tr><td>63</td><td>14~24</td></tr></table>	D	dh-eh	12	3~5	16	3~6	20	4~8	25	5~12	32	8~16	40	10~18	50	12~20	63	14~24
	D	dh-eh																	
	12	3~5																	
	16	3~6																	
	20	4~8																	
	25	5~12																	
32	8~16																		
40	10~18																		
50	12~20																		
63	14~24																		
选型方法 dh3.1 eh4.5																			
① 最小单位0.1																			
② dh须≤eh																			
③ 选型时须将d(e)变更为dh(eh)																			