


# 密封圈

- VA型
- ED型

## VA型

代码	类型	材质	硬度(邵氏)	颜色	使用温度范围	使用压力范围	线速度	用途
XUE21	VA型	丁腈橡胶	HA60±5	黑色	-30~100°C	0.03MPa以下	19m/s以下	耐矿物油、水、空气等轴用旋转密封

适用标准: JB/T 6994-2007

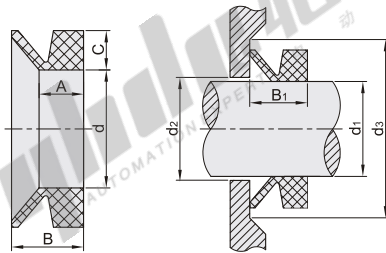

代码	型号	规格	公称轴径	d <sub>1</sub> 轴径	d	C	A	B	d <sub>2</sub> (max)	d <sub>3</sub> (min)	B <sub>1</sub> 安装宽度
XUE21		003	3	2.7~3.5	2.5	1.5	2.1	3	d <sub>1</sub> +1	d <sub>1</sub> +6	3.0±0.4
		004	4	3.5~4.5	3.2	2	2.4	3.7			
		006	6	5.5~6.5	5.2						
		007	7	6.5~8.0	6						
		008	8	8.0~9.5	7	3	3.4	5.5	d <sub>1</sub> +2	d <sub>1</sub> +9	4.5±0.6
		010	10	9.5~11.5	9						
		012	12	11.5~12.5	10.5						
		014	14	13.5~15.5	12.5						
		016	16	15.5~17.5	14	4	4.7	7.5	d <sub>1</sub> +3	d <sub>1</sub> +12	6.0±0.8
		018	18	17.5~19	16						
		022	22	21~24	20						
		025	25	24~27	22						
		028	28	27~29	25	5	5.5	9	d <sub>1</sub> +15	d <sub>1</sub> +15	7.0±1.0
		030	30	29~31	27						
		032	32	31~33	29						
		035	35	33~36	31						
038	38	36~38	34								
040	40	38~43	36								



请按图示订货

代码	规格
XUE21	003
XUE21	004

XUE21—003



未税价(元)


数量	1~10	11~
价格	100%	另行报价




交货期  
7

## ED型

代码	类型	材质	硬度(邵氏)	颜色	使用温度范围	用途
XUE61	ED型	丁腈橡胶	HA90±5	黑色	-20~100°C	用在螺纹油口和螺杆端头



### 安装尺寸图

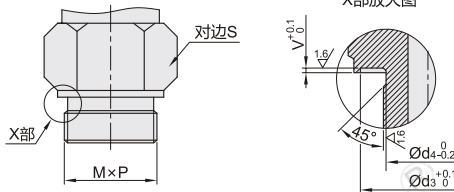

代码	型号	规格	d <sub>1</sub>	D <sub>1</sub>	C	h	适用螺纹 MxP	d <sub>4</sub>	d <sub>3</sub>	V	S		
XUE61		8	6.4	9.9	1	0.5	M8x1	6.3	10	0.8	—		
		10	8.4	11.9			M10×1.5&G1/8A	8.3	12		14		
		12	9.8	14.4			M12×1.5	9.7	14.5		17		
		14	11.6	16.5			M14×1.5&G1/4A	11.5	16.6		1.3	19	
		16	13.8	18.9	1.5	0.8	M16×1.5	13.7	19	1.2	22		
		17	14.7	18.9			G3/8A	14.6					
		18	15.7	20.9			M18×1.5	15.6	21			1.3	24
		20	17.8	22.9			M20×1.5	17.7	23				
		21	18.5	23.9	2	1	G1/2A	18.4	24	1.2	27		
		22	19.6	24.3			M22×1.5	19.5	24.4				
		24	21.8	26.9			M24×1.5&G5/8A	21.7	27			1.3	—
		26	23.9	29.2			M26×1.5&G3/4A	23.8	29.3				32
		42	38.8	45.8			M42×2&G1-1/4A	38.6	46			50	
		48	44.7	50.7			M48×2&G1-1/2A	44.5	51				1.7



请按图示订货

代码	规格	d <sub>1</sub>
XUE61	8	6.4
XUE61	10	8.4

XUE61—10



未税价(元)

数量	1~9	10~
价格	100%	另行报价



交货期  
9