



代码	类型	材质	硬度(邵氏)	颜色	使用温度范围	用途
XTJ01	V系列	丁腈橡胶	HA65 <sup>+0</sup>	黑色	-20~100°C	耐矿物油用
XTJ02		氟橡胶			-10~200°C	耐高温用
XTJ11	AS系列	丁腈橡胶			-30~100°C	耐矿物油用
XTJ12		氟橡胶			-10~200°C	耐高温用

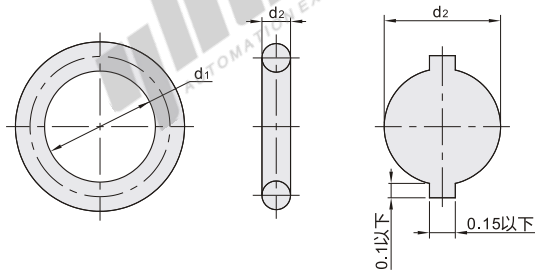

截面放大图



视角标准：第一视角

V系列(JIS B 2401)

代码	规格	公称编号	d <sub>2</sub>	d <sub>1</sub>		
				尺寸	XTJ01	XTJ02
XTJ01 XTJ02	15	V15	4.0±0.09	14.5	±0.19	±0.23
	24	V24		23.5	±0.23	±0.28
	34	V34		33.5	±0.32	±0.39
	40	V40		39.5	±0.36	±0.44
	55	V55		54.5	±0.48	±0.58
	70	V70		69.0	±0.60	±0.73
	85	V85		84.0	±0.71	±0.86
	100	V100		99.0	±0.82	±0.99
	120	V120		119.0	±0.96	±1.16
	150	V150		148.5	±1.17	±1.41
	175	V175	173.0	±1.35	±1.62	

AS系列(AS568)

代码	规格	d <sub>2</sub>	d <sub>1</sub>	
			尺寸	公差
XTJ11 XTJ12	001	1.02±0.06	0.74	
	002	1.27±0.06	1.07	±0.09
	003	1.52±0.06	1.42	
	004		1.78	
	005		2.57	
	006		2.90	
	007		3.68	
	008		4.47	
	009		5.28	
	010		6.07	
	011		7.65	±0.11
	012		9.25	
	013		10.82	
	014		12.42	
	015		14.00	
	016		15.60	
	017	1.78±0.06	17.17	
	018		18.77	
	019		20.35	
	020		21.95	
	021		23.52	
	022		25.12	
	023		26.70	
	024		28.30	±0.14
	025		29.87	
	026		31.47	
	027		33.05	
	028		34.65	
	029		37.82	
	030		41.00	±0.24

V系列(JIS B 2401)

型号		公称编号
代码	规格	
XTJ01	15	V15
XTJ02	24	V24

XTJ01—15



优惠价

数量	1~9	10~
价格	100%	另行报价

未税价(元)



交货期

5