


双面带防尘盖式 经济型

微型带凸缘深沟球轴承

代码	类型	轴承类型 代码	轴承游隙	轴承精度	后置代码	轴承材质	
BAL....-E	经济型	6	CO/CN	GB/T 307.1 0级	ZZ (双面带防尘盖)	国标	相当
BAL....-E-SUS						GCr15	SUJ2
						30Cr13	SUS420



RoHS

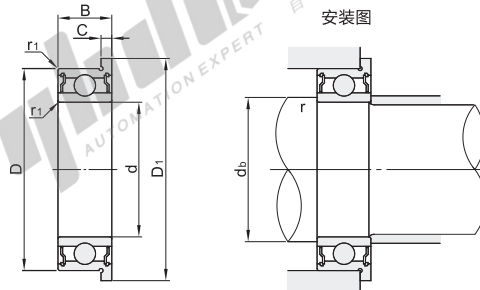

安装图

- ① 经济型适合中低转速、低载荷。
- ② 不承诺品牌。



视角标准：第一视角

代码	轴承型号	d	D	B	D ₁	C	r ₁ (min)	基本额定负载 (N)		极限转速 rpm (参考)	安装尺寸		重量 (g) (参考)
								Cr(动)	Cor(静)		d _s (min)	r (max)	
BAL....-E BAL....-E-SUS	682ZZ	2	5	2.3	6.1	0.6	0.08	135	40	68000	2.7	0.08	0.23
	692ZZ	2.5	6	3	7.5	0.8	0.15	264	79	60000	3	0.15	0.44
	682AZZ		6	2.6	7.1		0.08	167	59	56000	3.7	0.08	0.41
	692AZZ	3	7	3.5	8.5	0.9	0.15	308	103	50000	3.85	0.15	0.67
	673ZZ		6	2.5	7.2	0.6	0.08	193	75	56000	3.6	0.08	0.25
	683ZZ	4	7	3	8.1	0.8	0.1	312	104	50400	3.9	0.1	0.52
	693ZZ		8	4	9.5	0.9	0.15	448	144	48000			0.71
	603ZZ	5	9	5	10.5	1	0.15	456	151	44000	4.2	0.15	1.6
	623ZZ		10	4	11.5			512	179	40000			1.79
	674ZZ	6	7	2.5	8.2	0.6	0.08	177	70	48000	4.6	0.08	0.34
	684ZZ		9		10.3		0.15	512	179	42000	5	0.1	1.13
	694ZZ	7	11	4	12.5	1		572	220	38000	5.2	0.15	2
	604ZZ		12		13.5		0.2	765	280				2.56
	624ZZ	8	13	5	15			1048	392	32000	5.6	0.2	3.49
	675ZZ		8	2.5	9.2	0.6	0.08	173	72	42000		0.08	0.39
	685ZZ	9	11	5	12.5		0.15	572	225	36000	6.2	0.15	2.17
	695ZZ		13	4	15	1	0.2	864	344	34000	6.6	0.2	2.69
	605ZZ	10	14		16		0.3	1064	404	32000			3.89
	625ZZ		16		18		0.3	1383	540	28000	7.7	0.3	5.51
	676ZZ	11	10	3	11.2	0.6	0.1	372	156	36000	6.6	0.1	0.73
	686ZZ		13		15	1.1	0.15	864	352		7	0.15	3.03
	696ZZ	12	15		17	1.2	0.2	1080	424	32000	7.6	0.2	4.29
	606ZZ		17		19		0.3	1752	692	30000	8	0.3	6.49
	626ZZ	13	19	6	22	1.5		1868	716	25000			9.77
	678ZZ		12	3.5	13.6	0.8	0.1	412	201	32000	8.8	0.1	0.85
	688ZZ	14	16	5	18	1.1	0.2	1288	572		9.6	0.2	4.46
	698ZZ		19	6	22		0.3	1592	692	28000			8.39
	608ZZ	15	22	7	25	1.5		2680	1120	27000	10	0.3	13
	6700ZZ		15	4	16.5	0.8	0.15	684	348	12000	10.3	0.15	2.09
	6800ZZ	16	19	5	21	1		1372	672	29000	12		6.09
	6900ZZ		22	6	25	1.5	0.3	2156	1018	27200	13.2	0.3	11.09
	6701ZZ	17	18	4	19.5	0.8	0.2	740	424	10000	12.4	0.2	3.39
	6801ZZ		21	5	23	1.1		1532	832	26000			7.09
	6901ZZ	18	24	6	26.5	1.5	0.3	2308	1172	24000	14	0.3	13.19
	6702ZZ		21	4	22.5	0.8	0.2	749	465	8800	15.4	0.2	3.89
	6802ZZ	19	24	5	26	1.1		1658	1002	22000			8.29
	6902ZZ		28	7	30.5	1.5	0.3	3456	1807	20000	17	0.3	19.89
	6703ZZ	20	23	4	24.5	0.8	0.2	800	526	7600	17.4	0.2	4.39
	6803ZZ		26	5	28	1.1		1786	1164	20000			8.89
	6903ZZ	21	30		32.5	1.5		3670	2052	18000	19		21.39
	6804ZZ		32		35		0.3	3212	1969	16000		0.3	19.79
	6904ZZ*	22	9		2			51048	2945	15000	22		42.79
	6805ZZ		37	7	40	1.5		3442	2345	14000	27		26.09

① 带*规格仅适用SUJ2材质。

① 1Kg=9.81N



请按图示订货

代码	轴承型号	d	D
BAL....-E	682ZZ	2	5
BAL....-E	692ZZ		6

BAL682ZZ



未税价(元)

数量	1~9	10~
价格	100%	另行报价



交货期
5

关节轴承

E7