



模架用滑动导柱组件

❗ 导柱端面有中心孔, 孔径 $\varnothing 2 \sim \varnothing 5$, 深度 $5 \sim 6$ 。



装卸型·无挡块
OFJ01

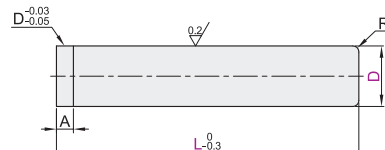

LOCTITE 粘接型
OFT21

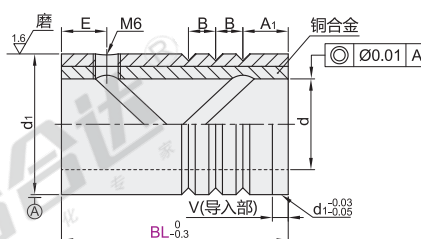

自润滑型
OFT23

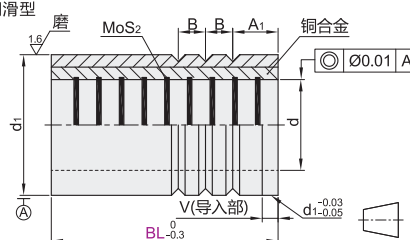

视角标准：第一视角

○ 压入型

型号	L																BL		
代码	D																		
OFH85	20	100	110	120	130	140	150	160	170	180							50		
OFH86	22	120 130 140 150 160 170 180										50 60							
OFH87	25	120 130 140 150 160 170 180										60 80							
OFH88	28	140 150 160 170 180 190 200										60 80							
	32	160 170 180 190 200 220 240										80 100							
OFH85	38	180 190 200 220 240 260										80 100 *120							
OFH87	45	180 190 200 220 240 260										*80 100 120							
	50	200 220 240 260										100 120							
OFH85	60	200 220 240 260										100 120							

❗ 带*规格仅适用于OFH87。

导套尺寸表

d	d ₁	V	A ₁	B	E(仅OFT21/OFT22)
20	31				
22	$\begin{smallmatrix} +0.027 \\ +0.022 \end{smallmatrix}$ 34	4	10	6	10
25	$\begin{smallmatrix} 37 \\ -0.007 \end{smallmatrix}$				
28	$\begin{smallmatrix} 42 \\ +0.032 \\ +0.027 \end{smallmatrix}$	5	12	7	
32	$\begin{smallmatrix} 46 \\ +0.037 \\ +0.032 \end{smallmatrix}$				BL=80时, E=10
38	$\begin{smallmatrix} 54 \\ -0.008 \end{smallmatrix}$				BL=100时, E=15
45	$\begin{smallmatrix} 62 \\ +0.040 \\ +0.035 \end{smallmatrix}$	6	15	10	
50	$\begin{smallmatrix} 70 \\ +0.045 \\ +0.040 \end{smallmatrix}$				15
60	$\begin{smallmatrix} 80 \\ -0.010 \end{smallmatrix}$				

