
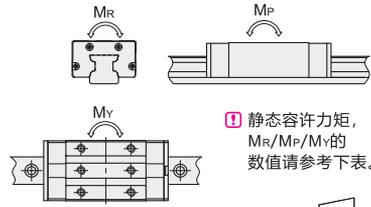


# 滑块加长型 · 可互换

高级/精密级 重预压(F1)0.07~0.09C

# 滚柱式直线导轨

代码	类型	精度等级	滑块固定方式	滑块数量	滑轨固定方式	材质	
						滑轨	滑块
ICD01	组件	高级	上锁式	单滑块 双滑块	上锁式	S55C	SNCM220
ICD03							
ICD05							
ICD06	精密级	单滑块 双滑块	上锁式	上锁式	S55C	SNCM220	
ICD03							
ICD05							

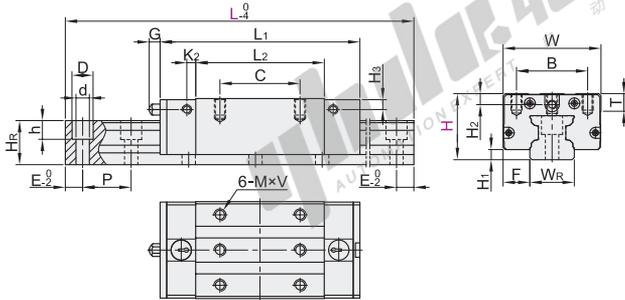

① 静态容许力矩, Mr/Mp/My 的数值请参考下表。

视角标准: 第一视角

型号	代码	H	L	H1	F	滑块尺寸										
						W	B	C	L1	L2	K2	G	MxV	T	H2	H3
ICD01	40	134	~973	4.8	12.5	48	35	50	115.5	83.5	6.6	12	M6x9	9.5	10	10
	45	176	~1295	6	16	60	40	60	135.2	98.7	8	12	M8x12	10	10	10
	55	176	~1295	6.5	18	70	50	72	153.5	110.5	8	12	M8x14	12	15	15
ICD05	70	180	~1702	8	20.5	86	60	80	189.4	141.7	10	13.5	M10x19	17	20	20
	80	206	~1945	10	23.5	100	75	95	235.4	179.5	12	13.5	M12x19	18	21	21
ICD06	90	328	~1977	12	31.5	126	76	120	300.4	230	12	13.5	M16x20	19.5	16.5	16.5

① L尺寸的最小值由滑块长度与滑块数量而定。② 每个规格滑轨长度L最大可做到4000mm/条。

滑轨尺寸			基本额定负载(KN)			静态容许力矩(KN-m)			重量				
WR	HR	D	h	d	P	固定螺钉	C(动)	Co(静)	MR	Mp	My	滑块(kg)	滑轨(kg/m)
23	23.5	11	9	7	30	M6x20	36.3	82.9	0.95	1.08	1.08	0.85	3.5
28	27.5	14	12	9	40	M8x25	54	124	1.72	1.96	1.96	1.22	5
34	30.5	14	12	9	40	M8x25	73.9	169	2.85	2.94	2.94	2.15	7
45	37	20	17	14	52.5	M12x35	117.2	261.6	5.94	5.9	5.9	4.1	11.2
53	43	23	20	16	60	M14x45	172.5	378	10.26	10.6	10.6	7	15.6
63	52	26	22	18	75	M16x50	277	624	20.02	22.5	22.5	13.3	22.4

请按图示订货

型号	代码	H	L
ICD01	40	134	~973
ICD03	45	176	~1295

ICD01—H40—L135

● 优惠价


数量	1~9	10~
价格	100%	另行报价

未税价(元)

交货期

7

H	N(安装孔数)/E(螺钉中心孔至端面距离)			H	N(安装孔数)/E(螺钉中心孔至端面距离)			H	N(安装孔数)/E(螺钉中心孔至端面距离)			H	N(安装孔数)/E(螺钉中心孔至端面距离)		
	最小单位1	(安装孔数)	E		最小单位1	(安装孔数)	E		最小单位1	(安装孔数)	E		最小单位1	(安装孔数)	E
40	134~163	5		45	616~655	16		55	1056~1095	27		80	386~445	7	
	164~193	6			656~695	17			1096~1135	28			446~505	8	
	194~223	7			696~735	18			1136~1175	29			506~565	9	
	224~253	8			736~775	19			1176~1215	30			566~625	10	
	254~283	9			776~815	20			1216~1255	31			626~685	11	
	284~313	10			816~855	21			1256~1295	32			686~745	12	
	314~343	11			856~895	22			180~232	4			746~805	13	
	344~373	12			896~935	23			233~284	5			806~865	14	
	374~403	13			936~975	24			285~337	6			866~925	15	
	404~433	14			976~1015	25			338~389	7			926~985	16	
	434~463	15			1016~1055	26			390~442	8			986~1045	17	
	464~493	16			1056~1095	27			443~494	9			1046~1105	18	
	494~523	17			1096~1135	28			495~547	10			1106~1165	19	
	524~553	18			1136~1175	29			548~599	11			1166~1225	20	
	554~583	19			1176~1215	30			600~652	12			1226~1285	21	
584~613	20		1216~1255	31		653~704	13		1286~1345	22					
614~643	21		1256~1295	32		705~757	14		1346~1405	23					
644~673	22		176~215	5		758~809	15		1406~1465	24					
674~703	23		216~255	6		810~862	16		1466~1525	25					
704~733	24		256~295	7		863~914	17		1526~1585	26					
734~763	25		296~335	8		915~967	18		1586~1645	27					
764~793	26		336~375	9		968~1019	19		1646~1705	28					
794~823	27		376~415	10		1020~1072	20		1706~1765	29					
824~853	28		416~455	11		1073~1124	21		1766~1825	30					
854~883	29		456~495	12		1125~1177	22		1826~1885	31					
884~913	30		496~535	13		1178~1229	23		1886~1945	32					
914~943	31		536~575	14		1230~1282	24		328~402	5					
944~973	32		576~615	15		1283~1334	25		403~477	6					
176~215	5		616~655	16		1335~1387	26		478~552	7					
216~255	6		656~695	17		1388~1439	27		553~627	8					
256~295	7		696~735	18		1440~1492	28		628~702	9					
296~335	8		736~775	19		1493~1544	29		703~777	10					
336~375	9		776~815	20		1545~1597	30		778~852	11					
376~415	10		816~855	21		1598~1649	31		853~927	12					
416~455	11		856~895	22		1650~1702	32		928~1002	13					
456~495	12		896~935	23		206~265	4		1003~1077	14					
496~535	13		936~975	24		266~325	5		1078~1152	15					
536~575	14		976~1015	25		326~385	6		1153~1227	16					
576~615	15		1016~1055	26											



精度基准

尺寸精度	高级					精密级					
	40	45	55	70	80	40	45	55	70	80	90
单滑块	高度H的容许尺寸误差										
	±0.04	±0.04	±0.04	±0.05	±0.05	±0.07	-0.04	-0.04	-0.04	-0.05	-0.05
	宽度F的容许尺寸误差										
	±0.04	±0.04	±0.04	±0.05	±0.05	±0.07	-0.04	-0.04	-0.04	-0.05	-0.05
双滑块	高度H的相互误差										
	0.015	0.015	0.015	0.015	0.015	0.02	0.007	0.007	0.007	0.007	0.01
	宽度F的相互误差										
	0.015	0.015	0.015	0.02	0.02	0.025	0.007	0.007	0.007	0.01	0.015

滑块C面对滑轨A面的行走平行度  
滑块D面对滑轨B面的行走平行度

请参阅行走精度表P1252