


TR 带座轴承

方形座外球面球轴承·耐高温250℃
铸造型

代码	类型	材质	
UCF...HT2-TR	方形座外球面球轴承	耐高温250℃	HT200灰铸铁

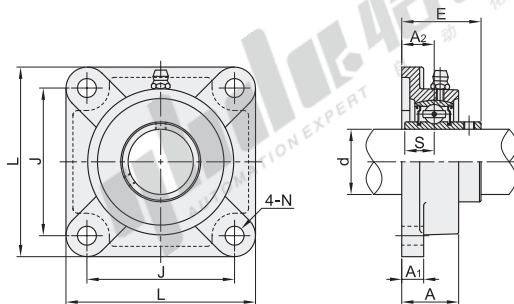

视角标准：第一视角

型号	d	L	J	A ₂	A ₁	A	E	N	S	螺栓	紧定扭力 (N·m)	额定负载(N)		重量 (Kg)
												动(Cr)	静(Cor)	
UCF204HT2-TR*	20	86	64	15	11	25.5	33.3	12.7				12800	6650	0.59
UCF205HT2-TR*	25	95	70	16	13	27	35.7	11.5	14.3	M10	12~21	14000	7880	0.78
UCF206HT2-TR*	30	108	83	18		31	40.2		15.9			19500	11200	1.12
UCF207HT2-TR*	35	117	92	19		34	44.4	14	17.5	M12	21~37	25700	15200	1.54
UCF208HT2-TR*	40	130	102	21		36	51.2					29600	18200	1.81
UCF209HT2-TR*	45	137	105			38	52.2	16	19	M14	34~60	31850	20800	2.02
UCF210HT2-TR	50	143	111	22	16	40	54.6					35100	23200	2.32
UCF211HT2-TR	55	162	130	25	18	43	58.4	18	22.2	M16	53~93	43550	29200	3.07
UCF212HT2-TR	60	175	143	29		48	68.7		25.4			47800	32800	4.34
UCF215HT2-TR	75	200	159		22	56	78.5	18		M16	53~93	66000	49500	6.33
UCF216HT2-TR	80	208	165	34		57	83.3	22	33.3			71500	54200	7
UCF218HT2-TR	90	235	187	40	25	68	96.3	23	39.7	M20	105~190	95900	71500	11.1

① 带*型号轴承座凹球面公差为间隙配合，其他型号为过渡配合。



请按图示订货

型号
UCF218HT2-TR



未税价(元)

优惠价
数量 1~9 10~
价格 100% 另行报价



交货期
10

