





代码	类型	定位精度(间隙)	材质	硬度
E-PDC41	经济型	0.005~0.02	YK30	56HRC~



T16/20




T25



T30/40

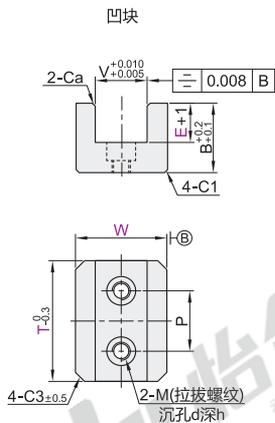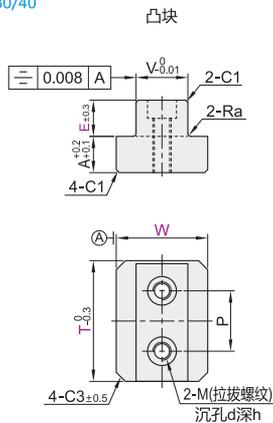

装配图



视角标准：第一视角


代码	型号		T	E	V	H	A	B	Ra	Ca	螺孔				安装螺栓	螺孔数量
	W	P									M	d	h			
E-PDC41	16	0.008	16	8	9	26	8	17	1	1	15	M4	6.5	3.5	M4	1
			20													
			25													
			30													
	20	0.01	12	12	12	30	17	21	1	1	15	M4	6.5	3.5	M3	2
				25												
				30												
				35												
	25	0.02	10	10	15	32	10	21	1	1	15	M5	8	5	M4	1
				15												
				20												
				30												
30	0.02	12	12	17	44	31	23	1	1	20	M6	9.5	6	M5	2	
			20													
			30													
			40													
35	0.02	15	15	20	41	28	21	1	1	20	M8	11	7	M6	2	
			20													

有效定位量

E	S(max) (有效定位量)
8	5.5
10	7.5
12	9.5
15	11
20	16

注意事项:

使用时需保留1mm左右的端面间隙, 以防止合模时凸块和凹块的端面发生碰撞, 造成破损。



请按图示订货

型号		T	E
代码	W		
E-PDC41	W30	T30	E20



未税价(元)

优惠价	
数量	价格
1~5	100% 另行报价
6~	



交货期
12