


TR 带座轴承

菱形座外球面球轴承·耐高温250℃
铸造型

代码	类型	材质	
UCFL...HT2-TR	菱形座外球面球轴承	耐高温250℃	HT200灰铸铁 GCr15

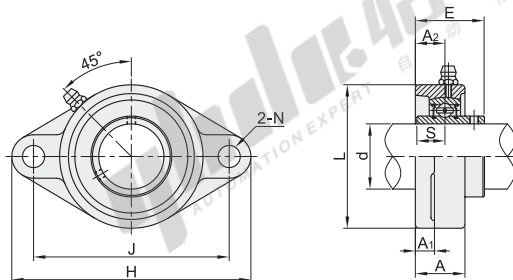

视角标准：第一视角

型号	d	H	J	L	A ₂	A ₁	A	E	N	S	螺栓	紧定扭力 (N·m)	额定负载(N)		重量 (Kg)
													动(Cr)	静(Cor)	
UCFL204HT2-TR*	20	113	90	60	15	11	25.5	33.3		12.7			12800	6650	0.42
UCFL205HT2-TR*	25	130	99	68	16		27	35.7	11.5	14.3	M10	12~21	14000	7880	0.61
UCFL206HT2-TR*	30	148	117	80	18	13	31	40.2		15.9			19500	11200	0.9
UCFL207HT2-TR*	35	161	130	90	19		34	44.4	14	17.5	M12	21~37	25700	15200	1.21
UCFL208HT2-TR*	40	175	144	100	21		36	51.2					29600	18200	1.55
UCFL209HT2-TR*	45	188	148	108		16	38	52.2		19			31850	20800	1.87
UCFL210HT2-TR	50	197	157	115	22		40	54.6	18		M16	53~93	35100	23200	2.16
UCFL211HT2-TR	55	224	184	130	25	18	43	58.4		22.2			43550	29200	2.89
UCFL212HT2-TR	60	250	202	140	29		48	68.7					47800	32800	3.75
UCFL213HT2-TR	65	258	210	155	30	20	50	69.7	23	25.4	M20	105~190	57200	40000	4.68
UCFL216HT2-TR	80	290	233	180	34	22	58	83.3		33.3	M22	145~260	71500	54200	6.76
UCFL218HT2-TR	90	320	265	205	40	23	68	96.3	25	39.7			95900	71500	10.3

① 带*型号轴承座凹球面公差为间隙配合，其他型号为过渡配合。



请按图示订货

型号

UCFL218HT2-TR



未税价(元)

优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

10