



弯接头 外螺纹

精密型 耐热快速接头

代码	类型		材质			表面处理
			主体	螺纹部	密封部材料	主体
J-XYP31	外螺纹	弯接头	黄铜	黄铜	耐热NBR	镀镍

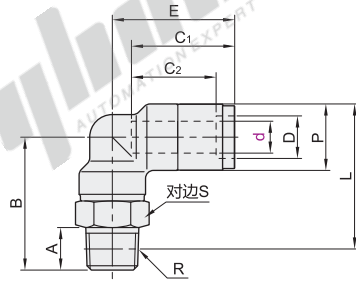

型号		公称 型号	R	D	A	B	L	P	C ₁	C ₂	E	S	喷嘴直径	有效断面积 (mm ²)	重量(g)	
代码	d															
J-XYP31	4	M5	M5		3	19.8	22							1.8	1.5	18
		1	R1/8	6	8	22.8	24.1	10.5	17.6	15	20.7	10		2.5	3.5	21
		2	R1/4		11	25.8	25						14			31
	6	M5	M5		3	22	25.3							1.8	1.9	26
		1	R1/8	8	8	25	27.3	12.5	19.4	16	23	12				28
		2	R1/4		11	28	28.2					14	4	9	36	
	8	3	R3/8		12	29.8	29.7					17			49	
		1	R1/8		8	28	31.3					14			36	
		2	R1/4	10	11	31	32.2	14.5	20.2	17	24.8	17	6	16	41	
	10	3	R3/8		12	32.8	33.7								55	
		1	R1/8		8	32.5	37.8					17		22.5	67	
		2	R1/4		11	35.5	38.8								69	
		3	R3/8	12	12	38.5	39.5	18.6	23.2	23	29.3			30	78	
	12	4	R1/2		15	39.5	40.6					22	8		104	
		2	R1/4		11	37.5	42.3					21		38	107	
		3	R3/8	14	12	38.5	43	21.6	26.3	19.5	33.4		9	39	113	
	4	R1/2		15	41.5	44.1					22			129		

调速
接头
类
D8



型号		公称 型号	R
代码	d		
J-XYP31	4	M5	
	1	R1/8	

J-XYP31-d4-M5

● 优惠价

数量	1~29	30~
价格	100%	另行报价

未税价(元)

交货期

1

