



帽型谐波减速机


中轴组合型 标准扭矩

代码	类型	结构形式
ZND07	标准扭矩	中轴组合型



规格: 14/17




A-A剖面图



规格: 20/25/32/40/45/50/58/65

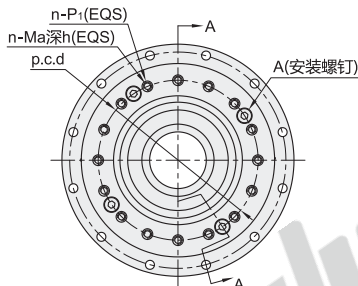

A-A剖面图



视角标准: 第一视角

型号			减速比	L	L ₁	L ₂	n	Ma深h	P ₁	p.c.d	A 安装 螺钉	B 安装 螺钉	N	P ₂	P.C.D	T	W _{JS9}	Mb深f	D _{h7}	D _{1h7}	D _{2h7}	D ₃	D _{4h7}	
代码	规格																							
ZND07	14	50 80 100		50.5	14	11	8	M3深5		44		2-M3	8		64	0.5	—	—	74	6	36	54	70	
	17	50 80 100 120		56	16	12		M3深6	3.5	54	4-M3			3.5	74				84	8	45	64	80	
	20			63.5	20	16.5				62		4-M3			84	8.2		3	M3深6	95	10	50	75	90
	25			72.5			16	M4深7	4.5	77			12	4.5	102				115		60	90	110	
	32	50 80 100 120 160		84.5	25	22.5		M5深8	5.5	100	4-M4	4-M4		5.5	132	11		5	M5深10	147	14	85	115	142
	40			100	30	27.5		M6深10	6.6	122	4-M5	6-M4		6.6	158	13			175	16	100	140	170	
	45			108		28	12	M8深10		140			18		180	15.5	0.1		195	19	120	160	190	
	50			121				M8深11	9		154	8-M5	6-M5	12	9	200		6	M6深12	220		130	175	214
	58	80 100 120 160		133	35	33	16			178	6-M6	8-M5			226				246	22	150	201	240	
65			156	40	39	16	M10深15	11	195	8-M6	8-M6	16	11	258	21		8	M8深16	284	25	160	221	276	



型号	代码	规格	减速比
ZND07	14	50 80 100	
	17	50 80 100 120	

ZND07—14—50

帽型谐波减速机

标准扭矩系列性能参数表

规格	减速比	输入2000r/min 时的额定转矩		启动停止时的 容许峰值转矩		平均负载转矩 的容许最大值		瞬间容许 最大转矩		容许最高 输入转速	容许平均 输入转速
		N·m	kgf·m	N·m	kgf·m	N·m	kgf·m	N·m	kgf·m	r/min	r/min
14	50	5.7	0.58	19	1.9	7.2	0.74	36	3.7	8500	3500
	80	8.2	0.84	24	2.4	11.6	1.2	49	5		
	100	8.2	0.84	29	3	11.6	1.2	56	5.7		
17	50	17	1.7	35	3.6	27	2.8	73	7.4	7300	3500
	80	23	2.4	45	4.6	28	2.9	90	9.2		
	100	25	2.6	56	5.7	41	4.2	114	11.7		
	120	25	2.6	56	5.7	41	4.2	89	9.1		
20	50	26	2.7	58	5.9	36	3.6	102	10.4	6500	3500
	80	36	3.6	77	7.9	49	5	132	13		
	100	42	4.3	85	8.7	51	5.3	153	16		
	120	42	4.3	90	9.2	51	5.3	153	16		
25	160	42	4.3	96	9.8	51	5.3	153	16	5600	3500
	50	41	4.2	102	10.4	58	5.9	193	20		
	80	66	6.8	142	15	91	9.3	265	27		
	100	70	7.2	163	17	113	11.6	295	30		
32	120	70	7.2	174	18	113	11.6	316	32	4800	3500
	160	70	7.2	183	19	113	11.6	327	33		
	50	80	8.1	225	23	113	11.6	397	41		
	80	122	12	316	32	175	18	591	60		
40	100	138	14	346	35	227	23	673	69	4000	3000
	120	138	14	367	37	227	23	693	71		
	160	138	14	388	40	227	23	693	71		
	50	138	14	406	41	198	20	693	71		
45	80	208	21	524	53	287	29	990	101	3800	3000
	100	268	27	574	59	376	38	1091	111		
	120	297	30	623	64	456	46	1192	122		
	160	297	30	653	67	456	46	1192	122		
50	50	178	18	505	52	268	27	960	98	3500	2500
	80	316	32	713	73	394	40	1283	131		
	100	357	36	763	78	505	52	1586	162		
	120	406	41	831	85	626	64	1778	181		
58	160	406	41	891	91	636	65	1929	197	3000	2000
	80	376	38	950	97	524	53	1879	192		
	100	475	48	990	101	673	69	2081	212		
	120	534	55	1091	111	821	84	2081	212		
65	160	534	55	1192	122	851	87	2475	253	2500	1900
	80	554	57	1495	153	778	79	2475	253		
	100	703	72	1606	164	1071	109	3212	328		
	120	752	77	1737	177	1202	123	3363	343		
	160	752	77	1858	190	1222	125	3464	354		
	80	752	77	2131	217	1050	107	3757	383		
	100	961	98	2323	237	1535	157	4798	490		
	120	961	98	2535	259	1586	162	4798	490		
	160	961	98	2656	271	1586	162	4798	490		