


标准型
开口型

侧边安装型导向轴支座

标准型

代码	类型	材质		表面处理	附件
		国标	相当		
GEL01	标准型	45	S45C	发黑	1个内六角紧定螺钉
GEL02				喷细砂无电解镀锌	1个内六角紧定螺钉(不锈钢)

❗ 如对防锈有要求, 请优先选用不锈钢材质或喷细砂无电解镀锌产品。

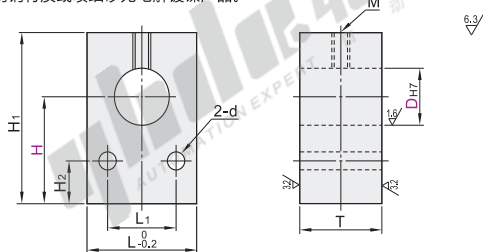

RoHS



型号		H		L	H ₁	H ₂	T	L ₁	d	M
代码	DH7									
GEL01 GEL02	8	+0.015 0	25 30	22	H+8.8 H+9.8			10		
	10		25 30							
	12		25 30							
	13		25 30							
	15	+0.018 0	25 30 40	25	H+10.8 H+11.8	5	12	14	4.5	4
	16		25 30 40	28	H+14.8			16		
	18		25 30 40 50							
	20	+0.021 0	25 30 40 50	32	H+17.8	7	16	18	6.6	
	25		30 40 50	38	H+19.8			24		6
	30		30 40 50 60		H+22.8					
	35		40 50 60	50	H+24.8	10	22	32	9	
	40	+0.025 0	40 50 60		H+29.8					



型号		H
代码	DH7	
GEL01	8	25 30
GEL02	10	
	12	

GEL02—D8—H25



优惠价	
数量	1~9 10~
价格	100% 另行报价




开口型

代码	类型	材质		表面处理	附件
		国标	相当		
GEP01	开口型	45	S45C	发黑	1个内六角圆柱头螺钉
GEP02				喷细砂无电解镀锌	
GEP06		0Cr18Ni9	SUS304	喷细砂本色阳极氧化	1个内六角圆柱头螺钉(不锈钢)
GEP08		LD31	A6063		

❗ 开口型, 安装孔D的公差H7为开口加工前的公差, 开口加工后由于有内部应力释放, 公差有可能增至H8左右, 不影响客户使用。

❗ 如对防锈有要求, 请优先选用不锈钢、铝合金材质或喷细砂无电解镀锌产品。

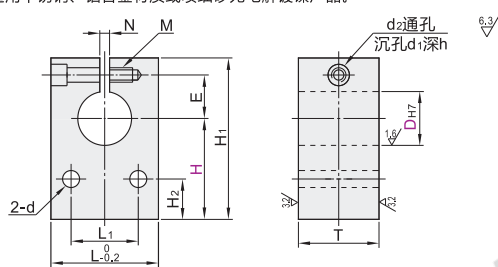

RoHS



型号		H		L	H ₁	H ₂	T	L ₁	E	d	M	d ₂	d ₁	h	N
代码	DH7														
GEP01 GEP02 GEP06 GEP08	8	20 25 30		22	H+15.8			10	11						
	10	20 25 30													
	12	20 25 30													
	13	20 25 30		25	H+17.8	5	12	14	13	4.5	M4深8	4.5	8	4.7	
	15	25 30 40		28	H+19.8			16	15						1.2~2.3
	16	25 30 40													
	18	25 30 40 50		32	H+25.8	7	16	18	18	6.6	M6深12	6.6	11	6.7	
	20	25 30 40 50													
	25	30 40 50		38	H+27.8			24	21						
	30	30 40 50 60			H+32.8				24						
	35	40 50 60		50	H+35.8	10	22	32	27	9	M8深16	9	14	9.2	1.2~3.5
	40	40 50 60			H+37.8				29						



型号		H
代码	DH7	
GEP01	8	20 25 30
GEP02	10	
	12	

GEP02—D8—H25



优惠价	
数量	1~9 10~
价格	100% 另行报价

