

压缩弹簧

滚珠滑套用

代码	类型	材质		表面处理	弹簧常数公差
		国标	相当		

YBSWP 滚珠滑套用 琴钢丝 SWP-B 发黑 $\pm 10\%$

特点：配套滚珠滑套使用，应用于模具、自动化线及有缓冲回弹需求的产品。

① 两端均未进行磨削加工。

② 使用次数为100万次(参考)。



③ 此系列为内径基准型弹簧，以保证内径公差进行生产，内径为正公差，适合配轴使用，外径仅做参考(按正公差)，选型时请注意。

❶ D₁尺寸公差

D ₁	公差
10.5以下	$+0.5$ 0
13.5以上	$+0.8$ 0

❷ L尺寸公差

L	公差
50以下	± 1.5
55以上	± 2.5

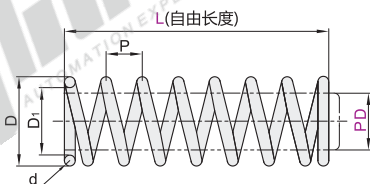

视角标准：第一视角

型号		D	D ₁	d	P	压紧长度	弹簧常数 g/mm
代码	PD L						
YBSWP	10	11.7	10.5	0.6	5	4.8	16
						5.4	14
						6.0	12
						6.6	11
						7.2	9
						7.8	8
						8.4	7
						9.0	6
	13	14.9	13.5	0.7	6	9.6	17
						10.2	15
						10.8	13
						11.4	12
						12.0	11
						12.6	10
						13.2	9
						13.8	8
YBSWP	16	18.3	16.7	0.8	12	14.4	17
						15.0	15
						15.6	13
						16.2	12
						16.8	11
						17.4	10
						18.0	9
						18.6	8
	20	22.5	20.5	1	14	19.2	17
						19.8	15
						20.4	13
						21.0	12
						21.6	11
						22.2	10
						22.8	9
						23.4	8

型号		D	D ₁	d	P	压紧长度	弹簧常数 g/mm
代码	PD L						
YBSWP	25	27.9	25.5	1.2	14	24.0	40
						24.6	35
						25.2	31
						25.8	28
						26.4	26
						27.0	23
						27.6	22
						28.2	20
	30	31.8	29.4	1.5	16	28.8	19
						29.4	18
						30.0	16
						30.6	15
						31.2	14
						31.8	13
						32.4	12
						33.0	11



请按图示订货

型号		D
代码	PD L	
YBSWP	10 30	11.7
	35	
	40	

YBSWP—PD10—L30



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期
1