


# 陶瓷氮化硅轴承

## ◀ 双面带密封圈型



代码	类型	材质			推荐使用最高温度
		套圈	球体	保持架	
BBD51	标准型	Si3N4	Si3N4	PTFE	180°C
BBD52				PEEK	200°C

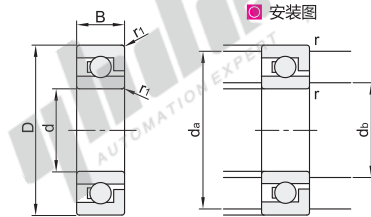

视角标准：第一视角

代码	型号 轴承型号	d	D	B	r1	安装尺寸			参考重量 (g)
						da(min)	da(max)	r(max)	
BBD51 BBD52	683-2RS	3	7	2	0.1	3.9	5.8	0.1	1.44
	693-2RS		8	3	0.15	4.2	6.8	0.15	2.16
	603-2RS		9				7.8		2.87
	623-2RS		10	4	8.8	4.65			
	633-2RS	4	13	5	0.1	4.6	11.4	0.2	8.6
	684-2RS		9	2.5		5	7.8	0.1	2.2
	694-2RS		11	4	0.15	5.2	9.8	0.15	4.7
	604-2RS		12		0.2	5.6	10.4	0.2	6
	624-2RS	13	5	0.3	6	11.4	0.3	9	
	634-2RS	16	6		14	13.1			
	685-2RS	5	11	3	0.15	6.2	9.8	0.2	3.5
	695-2RS		13	4	0.2	6.6	11.4		6.6
	605-2RS		14	5	0.3	7	12.4	0.3	9.1
	625-2RS		16				14		12.6
	635-2RS	19	6	0.15	7.6	17	0.2	21.1	
	686-2RS	13	3.5			11.8		5.3	
	696-2RS	15	5	0.2	7.6	13.4	0.2	9.9	
	606-2RS	6	17	6	0.3	8	15	0.3	14.9
	626-2RS		19	6			17		20.6
	636-2RS		22	7	20	34			
	687-2RS		14	3.5	0.15	8.2	12.8	0.15	5.9
	697-2RS	7	17	5	0.3	9	15	0.3	13.2
	607-2RS		19	6			17		19
	627-2RS		22	7	20	30.9			
	637-2RS		26	9	22	57.8			
	688-2RS	8	16	4	0.2	9.6	14.4	0.2	12.4
	698-2RS		19	6	0.3	10	17	0.3	17.9
	608-2RS		22	7			20		29.3
	628-2RS		24	8	22	41.2			
	638-2RS	28	9	26	68.1				
	689-2RS	9	17	4	0.2	10.6	15.4	0.2	9.1
	699-2RS		20	6	0.6	11	18	0.6	20.8
	609-2RS		24	7			22		35.5
	629-2RS		26	8	24	47.6			
	639-2RS	30	10	28	87.7				
	6800-2RS	10	19	5	0.3	12	17	0.3	12.8
	6900-2RS		22	6			20		22.2
	6000-2RS		26	8	24	43.7			
	6200-2RS		30	9	26	76.7			
	6300-2RS	35	11	31	124.7				
	6801-2RS	11	21	5	0.6	14	19	0.6	15.4
	6901-2RS		24	6			22		24.8
	6001-2RS		28	7	26	46.6			
	6201-2RS		32	8	30	87.7			
	6301-2RS	37	12	37	149.7				
	6802-2RS	12	24	5	0.6	16	22	0.6	16.9
	6902-2RS		28	7			26		27
	6002-2RS		32	8	30	63.7			
6202-2RS	35		9	33	74.7				
6302-2RS	42	13	42	198.7					
6803-2RS	15	35	11	0.6	19	31	0.6	108.7	
6903-2RS		42	13	1	20	37	1	198.7	
6003-2RS	17	35	11	0.3	19	24	0.3	16.9	
6203-2RS		42	13	1	20	37	1	198.7	

轴承  
关节  
轴承  
E7

# 陶瓷氮化硅轴承

## ◀ 双面带密封圈型

代码	型号 轴承型号	d	D	B	r <sub>1</sub>	安装尺寸			参考重量 (g)
						d <sub>6</sub> (min)	d <sub>a</sub> (max)	r(max)	
BBD51 BBD52	6903-2RS	17	30	7	0.3	19	28	0.3	41.1
	16003-2RS		35	8					78.7
	6003-2RS		10	98.7					
	6203-2RS		40	12					0.6
	6303-2RS	47	14	1	22	42	1	266.7	
	6403-2RS	62	17	1.1	23.5	55.5		642.7	
	6804-2RS	32	7	0.3	22	30	0.3	40.7	
	6904-2RS	37	9					137.7	
	16004-2RS	42	8					114.7	
	6004-2RS	12	12					0.6	24
	6204-2RS	47	14	1	25	42	1	258.7	
	6304-2RS	52	15	1.1	26.5	45.5		348.7	
	6404-2RS	72	19	1.1	27.5	46.5	1.1	960.7	
	6805-2RS	37	7	0.3	27	35	0.3	46.7	
	6905-2RS	42	9					102.7	
	16005-2RS	47	8					140.7	
	6005-2RS	12	12					0.6	29
	6205-2RS	52	15	1	30	47	1	308.7	
	6305-2RS	62	17	1.1	31.5	55.5		563.7	
	6405-2RS	80	21	1.5	32.5	56.5	1.1	1261	
	6806-2RS	42	7	0.3	32	40	0.3	57.7	
	6906-2RS	47	9					124.7	
	16006-2RS	55	9					207.7	
	6006-2RS	13	13					1	35
	6206-2RS	62	16	1	35	57	1	471.7	
	6306-2RS	72	19	1.1	36.5	65.5		826.7	
	6406-2RS	90	23	1.5	37.5	66.5	1.1	1760.7	
	6807-2RS	47	7	0.3	37	45	0.3	64.7	
	6907-2RS	55	10	0.6	39	51	0.6	178.7	
	16007-2RS	9	9	0.3	37	60	0.3	258.7	
	6007-2RS	62	14	1	40	57	1	362.7	
	6207-2RS	72	17	1.1	41.5	65.5		675.7	
	6307-2RS	80	21	1.5	43	72	1.5	1099.7	
	6407-2RS	100	25	2	46	89		2261	
	6808-2RS	52	7	0.3	42	50	0.3	69.7	
	6908-2RS	62	12	0.6	44	58	0.6	252.9	
	16008-2RS	9	9	0.3	42	66	0.3	305.7	
	6008-2RS	68	15	1	45	63	1	457.7	
	6208-2RS	80	18	1.1	46.5	73.5		1741	
	6308-2RS	90	23	1.5	48	82	1.5	1521	
	6408-2RS	210	27	2	49	101	2	2930	
	6809-2RS	58	7	0.3	47	56	0.3	90.7	
	6909-2RS	68	12	0.6	49	64	0.6	304.7	
	16009-2RS	10	10	1	49	71		402.7	
6009-2RS	75	16	1	50	70	1	576.7		
6209-2RS	85	19	1.1	51.5	78.5		996.7		
6309-2RS	100	25	1.5	53	92	1.5	1976		
6409-2RS	120	29	2	54	111	2	3641		
6810-2RS	65	7	0.3	52	63	0.3	119.7		
6910-2RS	72	12	0.6	54	68	0.6	326.7		
16010-2RS	10	10	1	54	76		414.7		
6010-2RS	80	16	1	55	75	1	620.7		
6210-2RS	90	20	1.1	56.5	83.5		1089		
6310-2RS	110	27	2	59	101	2	2521		
6410-2RS	130	31	2.1	61	119	2	4471		

轴承  
关节  
轴承

E7



型号	
代码	轴承型号
BBD51	683-2RS
BBD52	693-2RS

BBD51—683-2RS



● 优惠价		
数量	1~9	10~
价格	100%	另行报价

