

带座轴承


双轴承法兰型
带挡圈L尺寸选择型

来图定制



代码	类型	材质			表面处理
		轴承	轴承座	挡圈	
Y-DAP01	圆法兰		A6061		本色阳极氧化(哑光)
Y-DAP03	方法兰	不锈钢	SUS304	SUS304	—
Y-DAP04			A6061		本色阳极氧化(哑光)
Y-DAP05	对边法兰		SUS304		—
Y-DAP06			SUS304		—

轴承精度: GB/T 307.1 0 级
相当于: JIS B 1514 0 级

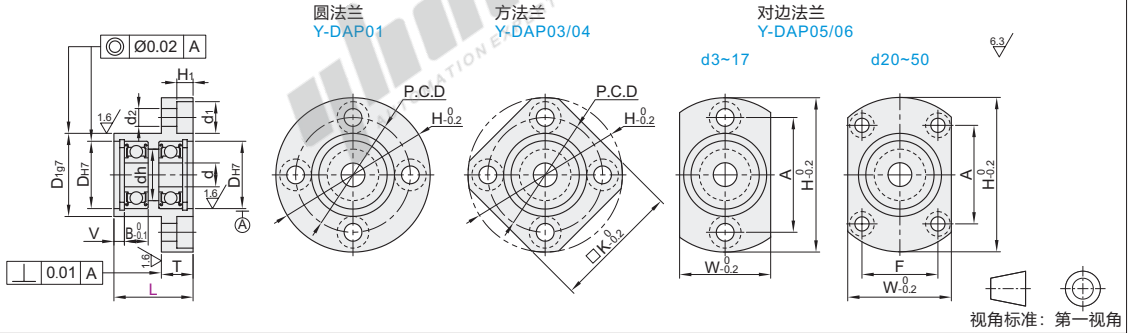

视角标准: 第一视角

型号			L 选择	d	D _{H7}	B	V	H	W	T	dh	D ₁₉₇	P.C.D	K	A	F	d ₁	d ₂	H ₁		
代码	轴承型号	密封圈																			
圆法兰 Y-DAP01	623		20 30	3	10 ^{+0.015} ₀	4		33	16	7	7	14	-0.006 -0.024	24	27	24		6.5	3.7	3.3	
	624			4	13			35	18		9	17		26	28	26					
	605			5	14 ^{+0.018} ₀	5		36	20		10	18		30	30						
	625	25 30		5	16		2.65	38	22		12	20		28	31	28					
	606		20 35	6	17			39	23		13	21	29	32	29						
	626			6	19		6	41	25		15	24	31	34	31						
	698			25 35	8	22		7	45	29		18	27	35	36	35					
	608				8	24	8	2.85	47	32		20	30	37	37	37					
	628		10		19		5	41	25	8	15	24	31	34	31		8	4.7	4.3		
	6900		10		22 ^{+0.021} ₀	6	2.65	45	29		19	27	35	36	35						
	6000		10	26	8		50	34		22	32	40	39	40							
	6200		10	30	9		54	38		24	36	44	42	44	—						
	6801		25 35	12	21		5		44	29		17	26	-0.007 -0.028	34	35	34				
	6901		25 40	12	24		6		48	31		21	30	-0.007 -0.028	38	38	38				
	6001			12	28	8	2.85	52	36		24	34	42	40	42						
	6201	ZZ (双盖式)		12	32 ^{+0.025} ₀	10		56	40		26	38	46	43	46						
6802		15		24 ^{+0.021} ₀	5		47	32		20	30	-0.007 -0.028	37	37	37						
6902	※VV	25 50	30 50	15	32 ^{+0.025} ₀	7		57	37		25	35		45	45	45					
6002	(非接触式 橡胶密封圈)	15		28	9		60	40		28	38		48	46	48						
6202		15		35	11	3.75	64	44		29	42		52	49	52						
6903		15		30 ^{+0.021} ₀	7	2.85	60	38	10	27	36		48	46	48		9.5	5.7	5.3		
Y-DAP04		17	35	10	3.75	66	44		31	42	-0.009 -0.034	54	50	54							
6203	DD (接触式 橡胶密封圈)	17	40	12	3.95	72	50		34	48		60	54	60							
6804		35 50	20	32		7	3.75	60	40		28	38	48	46	38	29					
6904			20	37	9		69	47		34	45		56	54	51	24					
6004			20	42 ^{+0.025} ₀	12	3.95	77	54		36	50		64	59	56	32					
6204			25	47	14		81	58	11	40	54	-0.010 -0.040	68	62	59	34	11	6.8	6.3		
6805		35 50	40 60	25	37	7	3.75	69	47		34	45	-0.009 -0.034	56	54	51	24				
6905		25		42	9		77	54		36	50		64	59	56	32					
6005		25		47	12	3.95	88	58		41	54	-0.010 -0.040	72	67	63	36					
6205		25		52 ^{+0.030} ₀	15	4.2	94	64		45	60	-0.009 -0.034	78	72	68	39	14	9.2	8.3		
6806		35 50	40 60	30	42 ^{+0.025} ₀	7	3.95	77	54		36	50	-0.009 -0.034	64	59	56	32	11	6.8	6.3	
6906		30		47	9		88	58	13	41	54		72	67	63	36					
6006		30		55	13		96	66		48	62	-0.010 -0.040	80	73	70	40	14	9.2	8.3		
6206		30		62	16	4.2	104	74		55	70		88	79	77	44					
6007			60 80	35	72 ^{+0.030} ₀	17	6	126	88	20	64	84	-0.012 -0.040	105	95	92	51	17.5	11.2	11.2	
6207		40		68	15	5.2	114	82	13	60	78	-0.010 -0.040	96	86	80	54	14	9.2	8.3		
6008		40		80	18	6	134	96		74	92	-0.012 -0.047	113	102		98	56				
6208		50		80	16				20												
6010	ZZ (双盖式)	70	90	90	+0.035	20	7	147	110		83	106	126	—	104	72	17.5	11.2	11.2		
6210		90																			

※ VV(非接触式橡胶密封圈)不适用于型号为623、624、605、606的轴承。 ※ VV(非接触式橡胶密封圈)、DD(接触式橡胶密封圈)、轴承材质为不锈钢。

可选加工



请按图示订货

代码	型号	轴承型号	密封圈	L
Y-DAP01	6801	ZZ	25 35	25 40
Y-DAP01	6901	DD	25 40	25 40

代码	型号	轴承型号	密封圈	L
Y-DAP01	6801	ZZ	25 35	25 40
Y-DAP01	6901	DD	25 40	25 40



未税价(元)

优惠价
数量 1~9 10~
价格 100% 另行报价



可选加工

可选加工	不装配轴承、挡圈
代码	NA

技术说明
不装配轴承及挡圈
(附带出货)