


压入型

代码	类型	材质		硬度	表面处理
		国标	相当		
PAC01	压入型	45	S45C	40~45HRC	无电解镀镍
PAC06		9Cr18Mo	SUS440C		

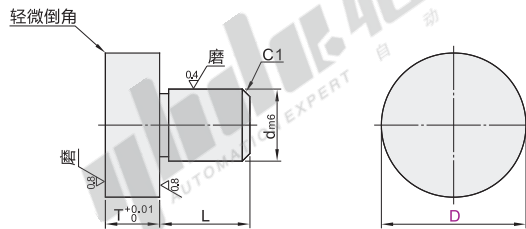

6.3

SUS440C材质可能会因淬火导致变色。

视角标准：第一视角

型号				L	T
代码	D	d _{m6}			
PAC01 PAC06	5	3	+0.008 +0.002	5	5
	5A			7	
	5B			5	3
	6			6	5
	6A	4		9	
	6B			6	3
	8			8	5
	8A			12	
	8B	5	+0.012 +0.004	8	3
	10	8			
	10A	6		12	5
	10B			8	3
	12		10		
	12A		15		
	16	8	+0.015 +0.006	10	
	16A			15	5
	18			12	
	18A			18	
	20	12	+0.018 +0.007	16	
	20A			24	



型号		d _{m6}
代码	D	
PAC01	5	3
5A		
5B		

PAC01—D5B




数量	1~9	10~
价格	100%	另行报价



5

螺纹型

代码	类型	材质		硬度	表面处理
		国标	相当		
PAC51	螺纹型	35CrMo	SCM435	40~45HRC	无电解镀镍
PAC56		9Cr18Mo	SUS440C		—
PAC71	尺寸指定型	35CrMo	SCM435	40~45HRC	无电解镀镍
PAC76		9Cr18Mo	SUS440C		—

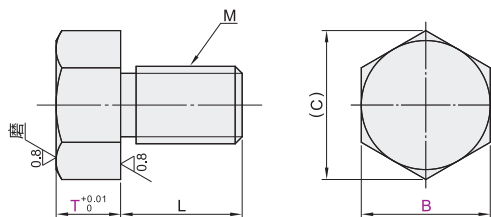

6.3

SUS440C材质可能会因淬火导致变色。

视角标准：第一视角

尺寸固定型

型号		T	M	L	(C)
代码	B				
PAC51 PAC56	5.5	3	3	5	6.4
	5.5B				
	7				
	8				
	10	5	4	6	8.1
	10A				
	13				
	13A				
	13B	8	6	9	11.5
	14				
	14A				
	14B				
	17	5	8	10	16.2
	17A				
	17B				
	19				
	19A	5	10	12	19.6
	19B				
	19A	8	12	15	21.9
	19B				

尺寸指定型

型号		T	M	L	(C)
代码	B	最小单位0.5			
PAC71 PAC76	5.5	2.0~10.0	3	5	6.4
	7		4	8.1	
	8		5	9.2	
	10		6	11.5	
	13	5.0~30.0	8	10	15
	14		10	16.2	
	17		12	19.6	
	19		15	21.9	



型号		T
代码	B	
PAC51	5.5	3
PAC56	5.5B	
	7	5

PAC51—B5.5



数量	1~9	10~
价格	100%	另行报价



5