

矩形弹簧



低压缩量弹簧(棕褐色)

代码	类型	材质	最大压缩量
YSWN	低压缩量	油冷回火弹簧钢	L×30%

□ L尺寸公差

L	公差
50以下	±0.5
50以上	±1.5%

- ① 载荷(±10%)
- ① 直角度(3°以下)
- ① 载荷(N)=定数(N/mm)×压缩量
- ① 使用次数:100万次(L×35%为30万次)
- ① 耐热温度为150°C
- ① 1kgf=9.81N
- ① 压紧长度为参考值,制作时会有少许差异。
- ① 弹簧颜色和圈数可能会因生产批次不同而异,但产品性能均符合标准,不影响使用!

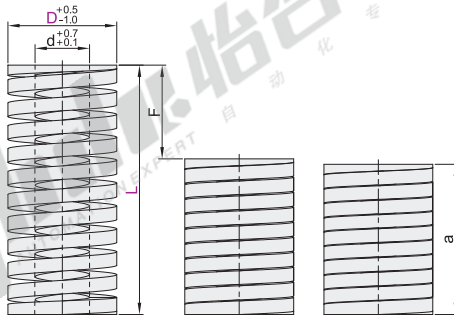

型号			内径 d	弹簧常数 N/mm	a	使用方法	
代码	D	L				F=L×30%	负载N
YSWN	14.5	20	8.5	45.76	12.5	6.0	274.6
		25		36.61	16.0	7.5	
		30		30.51	19.0	9.0	
		35		26.15	22.0	10.5	
		40		22.88	25.0	12.0	
		45		20.34	28.0	13.5	
		50		18.31	31.0	15.0	
		55		16.64	34.0	16.5	
		60		15.25	37.0	18.0	
		65		14.08	40.0	19.5	
		70		13.08	43.0	21.0	
		75		12.20	47.0	22.5	
		80		11.44	50.0	24.0	
		90		10.17	56.0	27.0	
		100		9.15	62.0	30.0	
		125		7.32	77.0	37.5	
		150		6.10	92.0	45.0	
		25		49.69	16.0	7.5	
		30		41.41	19.0	9.0	
		35		35.49	22.0	10.5	
YSWN	17	40	10.5	31.05	25.0	12.0	372.7
		45		27.60	28.0	13.5	
		50		24.84	31.0	15.0	
		55		22.59	34.0	16.5	
		60		20.70	37.0	18.0	
		65		19.11	40.0	19.5	
		70		17.75	43.0	21.0	
		75		16.56	47.0	22.5	
		80		15.53	50.0	24.0	
		90		13.80	56.0	27.0	
		100		12.42	62.0	30.0	
		125		9.94	77.0	37.5	
		150		8.28	92.0	45.0	
		30		54.48	19.0	9.0	
		35		46.70	22.0	10.5	
		40		40.86	25.0	12.0	
		45		36.32	28.0	13.5	
		50		32.69	31.0	15.0	
		55		29.72	34.0	16.5	
YSWN	21	60	13.5	27.24	37.0	18.0	490.3
		65		25.15	40.0	19.5	
		70		23.35	43.0	21.0	
		75		21.79	47.0	22.5	
		80		20.43	50.0	24.0	
		90		18.16	56.0	27.0	
		100		16.34	62.0	30.0	
		110		14.86	67.0	33.0	
		120		13.62	72.0	36.0	
		125		13.08	77.0	37.5	
		130		12.57	82.0	39.0	
		140		11.67	87.0	42.0	
		150		10.90	92.0	45.0	
		175		9.34	107.0	52.5	
		200		8.17	122.0	60.0	
		30		76.27	19.0	9.0	
		35		65.38	22.0	10.5	
		40		57.21	25.0	12.0	
YSWN	26	45	16.5	50.85	28.0	13.5	686.5
		50		45.76	31.0	15.0	
		55		41.60	34.0	16.5	
		60		38.14	37.0	18.0	
		65		35.20	40.0	19.5	
		70		32.69	43.0	21.0	
		75		30.51	47.0	22.5	
		80		28.60	50.0	24.0	
		90		25.42	56.0	27.0	

型号			内径 d	弹簧常数 N/mm	a	使用方法	
代码	D	L				F=L×30%	负载N
YSWN	26	100	16.5	22.88	62.0	30.0	686.5
		110		20.80	67.0	33.0	
		120		19.07	72.0	36.0	
		125		18.31	77.0	37.5	
		130		17.60	82.0	39.0	
		140		16.34	87.0	42.0	
		150		15.25	92.0	45.0	
		175		13.08	107.0	52.5	
		200		11.44	122.0	60.0	
		225		10.17	137.0	67.5	
		250		9.15	152.0	75.0	
		40		69.46	25.0	12.0	
		45		61.75	28.0	13.5	
		50		55.57	31.0	15.0	
		55		50.52	34.0	16.5	
		60		46.31	37.0	18.0	
		65		42.75	40.0	19.5	
		70		39.69	43.0	21.0	
		75		37.05	47.0	22.5	
		80		34.73	50.0	24.0	
YSWN	31	90	21	30.87	56.0	27.0	833.6
		100		27.79	62.0	30.0	
		110		25.26	67.0	33.0	
		120		23.15	72.0	36.0	
		125		22.23	77.0	37.5	
		130		21.37	82.0	39.0	
		140		19.85	87.0	42.0	
		150		18.52	92.0	45.0	
		160		17.37	97.0	48.0	
		170		16.34	102.0	51.0	
		175		15.88	107.0	52.5	
		180		15.44	112.0	54.0	
		190		14.62	117.0	57.0	
		200		13.89	122.0	60.0	
		250		11.11	152.0	75.0	
		300		9.26	182.0	90.0	
		40		73.55	25.0	12.0	
		45		65.38	28.0	13.5	
		50		58.84	31.0	15.0	
		55		53.49	34.0	16.5	
YSWN	37	60	26	49.03	37.0	18.0	882.6
		65		45.26	40.0	19.5	
		70		42.03	43.0	21.0	
		75		39.23	47.0	22.5	
		80		36.77	50.0	24.0	
		90		32.69	56.0	27.0	
		100		29.42	62.0	30.0	
		110		26.75	67.0	33.0	
		120		24.52	72.0	36.0	
		125		23.54	77.0	37.5	
		130		22.63	82.0	39.0	
		140		21.01	87.0	42.0	
		150		19.61	92.0	45.0	
		160		18.39	97.0	48.0	
		170		17.31	102.0	51.0	
		175		16.81	107.0	52.5	
		180		16.34	112.0	54.0	
		190		15.48	117.0	57.0	
		200		14.71	122.0	60.0	
		250		11.77	152.0	75.0	
		300		9.81	182.0	90.0	



型号	D	L
YSWN	14.5	20



数量	1~4	5~
价格	100%另行报价	



交货期
8

请按图示订货 YSWN-D14.5-L20 未税价(元)