



带通气孔型

内螺纹型	外螺纹型	材质		硬度	表面处理
		国标	相当		
YDJ41	YDJ61	GCr15	SUJ2	淬火硬度43~48HRC	—
YDJ42	YDJ75			淬火硬度HRC56~, 镀层硬度850HV~	镀硬铬, 镀层厚度3~5μm
YDJ46	YDJ66	0Cr18Ni9	SUS304	—	—
YDJ51	YDJ71	9Cr18Mo	SUS440C	淬火硬度48~53HRC	—



内螺纹型
YDJ41/42/46/51

外螺纹型
YDJ61/66/71/75

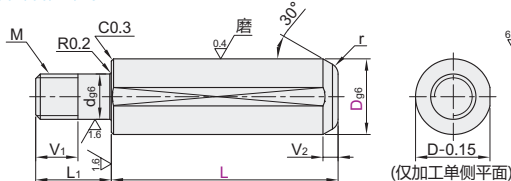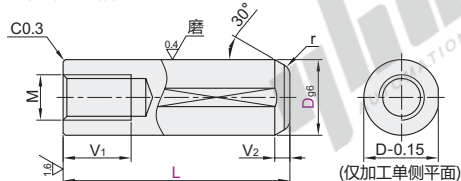

视角标准：第一视角

内螺纹型

型号			L					M	V ₁	V ₂	r	
代码	D _{g6}											
YDJ41 YDJ42 YDJ46 YDJ51	5	-0.004 -0.012	10	12	15	20	25	30	M3	6	1.0	1.0
	6		10	12	15	20	25	30	M4			
	8	-0.005 -0.014	10	12	15	20	25	30	M5	8	1.5	1.5
	10		10	12	15	20	25	30				
	12	-0.006 -0.017			15	20	25	30	M6	10	2.0	2.0

外螺纹型

型号		L				L ₁	d _{g6}	M	V ₁	V ₂	r
代码	D _{g6}	5	6	8	10	12	15	20	25	30	
YDJ61	5	-0.004	-0.012	-0.005	-0.014	-0.009	-0.017	-0.006	-0.012	-0.019	
YDJ66	6	-0.004	-0.012	-0.005	-0.014	-0.009	-0.017	-0.006	-0.012	-0.019	
YDJ71	8	-0.005	-0.014	-0.006	-0.012	-0.007	-0.014	-0.004	-0.008	-0.012	
YDJ75	10	-0.005	-0.014	-0.006	-0.012	-0.007	-0.014	-0.004	-0.008	-0.012	
	12	-0.006	-0.012	-0.007	-0.014	-0.008	-0.012	-0.005	-0.010	-0.015	

① D=6, L=10时, V₁=6。

② 当L-V₁<6时, 存在螺纹底孔贯穿的情况。

③ ()内L尺寸仅适用于YDJ66/71。



内螺纹型

型号	D _{g6}	L
YDJ41	5	10 12 15 20 25 30
YDJ42	6	10 12 15 20 25 30
YDJ46	8	10 12 15 20 25 30
YDJ51	10	10 12 15 20 25 30

YDJ41—D6—L12

外螺纹型

型号	D _{g6}	L
YDJ61	5	10 12 15 20 25 30
YDJ66	6	10 12 15 20 25 30
YDJ71	8	10 12 15 20 25 30
YDJ75	10	10 12 15 20 25 30

YDJ66—D6—L10



未税价(元)

● 优惠价
数量 1~4 5~
价格 100% 另行报价



交货期
3



交货期
5



交货期
6



① 无表面处理/无硬度

② 无表面处理


③ 有表面处理

螺栓固定型


形状		类型	材质		硬度	表面处理
圆型	多棱型		国标	相当		
YDL01	YDL11	螺栓固定型 环槽型	9CrWMn	SKS3	淬火硬度58~61HRC	—
YDL02	YDL12		—	—	淬火硬度HRC58~61, 镀层硬度850HV~	镀硬铬, 镀层厚度3~5μm
YDL03	YDL13		0Cr18Ni9	SUS304	—	—
YDL04	YDL14		—	—	镀层硬度850HV~	镀硬铬, 镀层厚度5~8μm
YDL05	YDL15		9Cr18Mo	SUS440C	淬火硬度48~53HRC	—




① D<P时(大头)




② D=P时(直杆)



③ D=P时, 多棱型带有退刀槽



④ D>P时(小头)



视角标准：第一视角

型号		最小单位0.01		最小单位1	最小单位0.1	d	V ₁	V ₂	E	C	(W)	
代码	D _{g6}	P	L	B							D<P时	D≥P时
圆型 多棱型	6	2.00~10.00	3~15	2.0~20.0	4.5	5	5	3	1	3	1.5	
	8S	3.00~13.00	3~18		6.5	3	6		0.5	3.5	1.8	
	8		4~18			1.5						
	10S	3.00~15.00	4~22	8	3	4	0.5	4	2.2			
	YDL01 YDL11	5.00~16.00	5~22		8		2					
	YDL02 YDL12		5~26		4		0.5					
	YDL03 YDL13	10.00~25.00	6~26	10	4	8	2	5	2.5			
	YDL04 YDL14		7~35		8		0.5					
	YDL05 YDL15	8~35	14		4		0.5					
		16	10.00~25.00	10~42	5.0~20.0	8	5	3	7	4		
	20	13.00~30.00	12~42	12		8		3	9	5		



内螺纹型

型号	D _{g6}	最小单位0.01	最小单位1	最小单位0.1
YDL01	6	2.00~10.00	3~15	2.0~20.0
YDL02	8S	3.00~13.00	3~18	2.0~20.0

YDL01—D6—P8—L10—B10

外螺纹型

型号	D _{g6}	最小单位0.01	最小单位1	最小单位0.1
YDL01	6	2.00~10.00	3~15	2.0~20.0
YDL02	8S	3.00~13.00	3~18	2.0~20.0

YDL01—D6—P8—L10—B10



未税价(元)

● 优惠价
数量 1~4 5~
价格 100% 另行报价



交货期
6



交货期
8

① 无表面处理

② 有表面处理