



# 带肩型·外螺纹型

## 大头/小头锥角型

# 定位销

P尺寸指定型		P.L.B尺寸指定型		材质		硬度	表面处理
圆型	多棱型	圆型	多棱型	国标	相当		
YDU01	YDU11	YDU21	YDU31	Cr12MoV	SKD11	淬火硬度53~58HRC 淬火硬度53~58HRC, 镀层硬度850HV~	—
YDU02	YDU12	YDU22	YDU32				
YDU05	YDU15	YDU25	YDU35	0Cr18Ni9	SUS304	—	—
YDU06	YDU16	YDU26	YDU36				
YDU08	YDU18	YDU28	YDU38	9Cr18Mo	SUS440C	淬火硬度48~53HRC	—

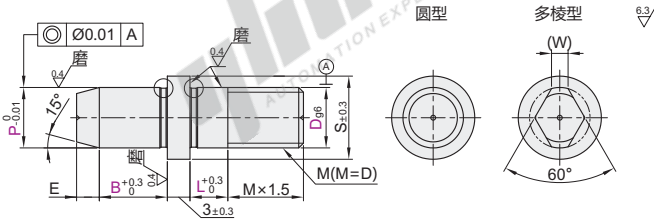

a=0.4(P=2)  
a=0.8(P≥3)  
d=0.05(P=2)  
d=0.1(P≥3)



① SUS440C材质的D部加工有识别槽。

### □ P尺寸指定型

型号		最小单位0.01		L	B	E	S	(W)	M
代码	D <sub>g6</sub>	P	P						
圆型 多棱型 YDU01 YDU11 YDU02 YDU12 YDU05 YDU15 YDU06 YDU16 YDU08 YDU18	3	-0.002 -0.008	2.00~4.00	2	5	1	6	1	M3
	4	-0.004 -0.012	2.00~5.00	3	6	2	8	1.2	M4
	5	-0.005 -0.014	3.00~6.00	5	8	3	11	1.5	M5
	6	-0.006 -0.017	4.00~7.00	8	10	4	15	1.8	M6
	8	-0.007 -0.020	5.00~9.00	10	15	5	23	2.2	M8
	10	-0.007 -0.020	7.00~11.00	15	20	6	28	3	M10
	12	-0.007 -0.020	7.00~12.00	20	25	7	33	3.2	M12
	16	-0.007 -0.020	13.00~16.00	25	30	8	38	4	M16
	20	-0.007 -0.020	16.00~20.00	30	35	9	43	5.5	M20

### □ P.L.B尺寸指定型

型号		最小单位0.01		最小单位1	最小单位0.1	E	S	(W)	M
代码	D <sub>g6</sub>	P	L	B					
圆型 多棱型 YDU21 YDU31 YDU22 YDU32 YDU25 YDU35 YDU26 YDU36 YDU28 YDU38	3	-0.002 -0.008	2.00~4.00	2~8	2.0~10.0	1	6	1	M3
	4	-0.004 -0.012	2.00~5.00	2~10	2.0~10.0	2	8	1.2	M4
	5	-0.005 -0.014	3.00~6.00	3~12	2.0~12.0	3	11	1.5	M5
	6	-0.006 -0.017	4.00~7.00	3~12	2.0~12.0	4	15	1.8	M6
	8	-0.007 -0.020	5.00~9.00	5~12	2.0~15.0	5	18	2.2	M8
	10	-0.007 -0.020	7.00~11.00	5~17	2.0~20.0	6	22	3	M10
	12	-0.007 -0.020	7.00~12.00	8~17	2.0~20.0	7	25	3.2	M12
	16	-0.007 -0.020	13.00~16.00	8~22	5.0~20.0	8	30	4	M16
	20	-0.007 -0.020	16.00~20.00	10~22	5.0~20.0	9	35	5.5	M20



代码	技术说明	代码	技术说明																				
HC()	<p>增加平面 加工肩部2个平面</p> <p>选型方法 HC10.0</p> <p>① 最小单位0.5; ② 不适用于圆型; ③ HC&gt;D, HC&gt;P.</p>	EC()	<p>变更E尺寸</p> <p>选型方法 EC3</p> <p>① 最小单位1; ② 圆锥小头直径1min; ③ B尺寸因EC的变化而变化。</p> <table border="1"> <thead> <tr> <th>D</th> <th>EC</th> <th>D</th> <th>EC</th> </tr> </thead> <tbody> <tr> <td>6</td> <td>3~11</td> <td>16</td> <td>5~22</td> </tr> <tr> <td>8</td> <td>4~14</td> <td>20</td> <td>6~23</td> </tr> <tr> <td>10</td> <td>4~18</td> <td></td> <td></td> </tr> <tr> <td>12</td> <td>4~20</td> <td></td> <td></td> </tr> </tbody> </table>	D	EC	D	EC	6	3~11	16	5~22	8	4~14	20	6~23	10	4~18			12	4~20		
D	EC	D	EC																				
6	3~11	16	5~22																				
8	4~14	20	6~23																				
10	4~18																						
12	4~20																						
RC	<p>变更颈部退刀槽为R0.5</p> <p>选型方法 RC</p> <p>① S-P≤2不适用</p>																						



□ P尺寸指定型				□ P.L.B尺寸指定型				□ 可选加工						
代码	D	P	最小单位0.01	代码	D	P	L	B	代码	D	P	L	B	可选加工代码
YDU01	3	2.00	0.01	YDU21	3	2.00	2	5	YDU21	3	2.00	2	5	EC() HC() RC
YDU02	4	2.00	0.01	YDU22	4	2.00	3	6	YDU22	4	2.00	3	6	



数量	1~4	5~
价格	100%	另行报价

未税价(元)



交货期	3
-----	---

① 无表面处理/无硬度



交货期	5
-----	---

① 无表面处理



交货期	6
-----	---

① 有表面处理