

# 标准型/带扳手槽型


两端外螺纹型·螺纹长度指定型

# 圆形支柱

### 标准型

代码	类型	材质		表面处理	
		国标	相当		
RAH41	螺纹长度 指定型	标准型	Q235	SS400	发黑
RAH42			0Cr18Ni9	SUS304	无电解镀锌
RAH43					
RAH46					

L	公差
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4

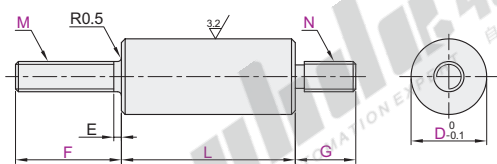

Q235材质的产品出货时带有防锈油。 视角标准：第一视角

型号	最小单位0.5				M			N			E	
代码	D	L	F	G								
RAH41	5	15.0~60.0	5.0~25.0	5.0~25.0	2.6	3		2.6	3		1.0	
	6		5.0~30.0	5.0~30.0	3	4		3	4		1.6	
	8	20.0~160.0	8.0~40.0	8.0~40.0			4	5		4	5	2.0
	10	20.0~360.0	8.0~45.0	8.0~45.0			4	5	6	4	5	2.5
	12	25.0~420.0	10.0~55.0	10.0~55.0			5	6	8	5	6	3.0
	15	30.0~520.0	12.0~60.0	12.0~60.0			6	8	10	6	8	3.5
RAH42	20	40.0~520.0	15.0~75.0	15.0~75.0			6	8	10	12	4.0	
RAH43	25	55.0~620.0	20.0~80.0	20.0~80.0			6	8	10	12	16	5.0
RAH46	30	65.0~720.0	25.0~90.0	25.0~90.0			6	8	10	12	16	20
	35	80.0~820.0	30.0~100.0	30.0~100.0			8	10	12	16	20	24
	40	80.0~920.0	35.0~110.0	35.0~110.0			10	12	16	20	24	
	50	80.0~1020.0	40.0~120.0	40.0~120.0			12	16	20	24		

Q 可选加工详情见下表。

Q 可选加工



型号	最小单位0.5				M	N
代码	D	L	F	G		
RAH41	5	15-60	5-25	5-25	2.6	3
RAH42	6	15-60	5-30	5-30	3	4

型号	最小单位0.5				M	N	可选加工代码
代码	D	L	F	G			
RAH41	5	15-60	5-25	5-25	2.6	3	AC
RAH42	6	15-60	5-30	5-30	3	4	LD()



● 优惠价

数量	1~9	10~
价格	100%	另行报价




交货期  
5

### 带扳手槽型

代码	类型	材质		表面处理	
		国标	相当		
RAH51	螺纹长度 指定型	带扳手槽型	Q235	SS400	发黑
RAH52			0Cr18Ni9	SUS304	无电解镀锌
RAH53					
RAH56					

L	公差
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4

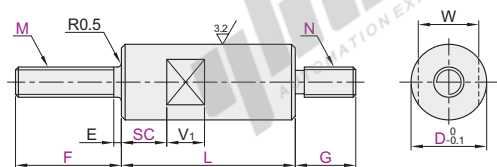

Q235材质的产品出货时带有防锈油。 视角标准：第一视角

型号	最小单位0.5				M			N			W	V1	E	
代码	D	L	F	G	SC									
RAH51	5	15.0~60.0	5.0~25.0	5.0~25.0	0~50.0	2.6	3		2.6	3		4		1.0
	6		5.0~30.0	5.0~30.0		3	4		3	4		5		1.6
	8	20.0~160.0	8.0~40.0	8.0~40.0		0~150.0			4	5		7	10	2.0
	10	20.0~360.0	8.0~45.0	8.0~45.0		0~350.0			4	5	6	8	10	2.5
	12	25.0~420.0	10.0~55.0	10.0~55.0		0~408.0			5	6	8	10	12	3.0
	15	30.0~520.0	12.0~60.0	12.0~60.0					6	8	10	12	16	3.5
RAH52	20	40.0~520.0	15.0~75.0	15.0~75.0	0~508.0			6	8	10	12	17	4.0	
RAH53	25	55.0~620.0	20.0~80.0	20.0~80.0	0~610.0			6	8	10	12	16	20	5.0
RAH56	30	65.0~720.0	25.0~90.0	25.0~90.0	0~705.0			6	8	10	12	16	20	6.0
	35	80.0~820.0	30.0~100.0	30.0~100.0	0~805.0			8	10	12	16	20	24	
	40	80.0~920.0	35.0~110.0	35.0~110.0	0~900.0			10	12	16	20	24	36	
	50	80.0~1020.0	40.0~120.0	40.0~120.0	0~1000.0			12	16	20	24	41		



型号	最小单位0.5				M	N	W
代码	D	L	F	G	SC		
RAH51	5	15-60	5-25	5-25	0-50	2.6	3
RAH52	6	15-60	5-30	5-30	0-50	3	4



● 优惠价

数量	1~9	10~
价格	100%	另行报价

Q 可选加工

型号	最小单位0.5				M	N	可选加工代码	
代码	D	L	F	G	SC			
RAH51	5	15-60	5-25	5-25	0-50	2.6	3	AC
RAH52	6	15-60	5-30	5-30	0-50	3	4	LD()



交货期  
5

RAH52—D5—L50—F20—G20—SC20—M3—N3—AC



代码	技术说明
AC	增加退刀槽 
LD()	选型方法 AC 加工R尺寸根部退刀槽。

代码	技术说明																								
LD()	增加六角扳手用通孔 																								
	选型方法 LD35 Q 最小单位1 Q 适用范围:D8~30 Q 指定d尺寸时, 请注意LD尺寸, 避免与螺孔干涉, 碰边等。 <table border="1"> <thead> <tr> <th>D</th> <th>d</th> <th>扳手对边</th> </tr> </thead> <tbody> <tr><td>8</td><td>2.5</td><td>2</td></tr> <tr><td>10</td><td>3</td><td>2.5</td></tr> <tr><td>12</td><td>3.5</td><td>3</td></tr> <tr><td>15</td><td>4</td><td>4</td></tr> <tr><td>20</td><td>5</td><td>5</td></tr> <tr><td>25</td><td>5.5</td><td>6</td></tr> <tr><td>30</td><td>6</td><td>8</td></tr> </tbody> </table>	D	d	扳手对边	8	2.5	2	10	3	2.5	12	3.5	3	15	4	4	20	5	5	25	5.5	6	30	6	8
D	d	扳手对边																							
8	2.5	2																							
10	3	2.5																							
12	3.5	3																							
15	4	4																							
20	5	5																							
25	5.5	6																							
30	6	8																							