


内六角平圆头螺钉

代码	类型	螺纹	材质	硬度	表面处理	强度等级
TAR01	内六角平圆头螺钉	粗牙	10B21	37~42HRC	发黑	10.9
TAR04			SUS304	—	镀镍	A2-70
TAR05			SUS316	—	—	A4-70

TAR01



TAR02/05

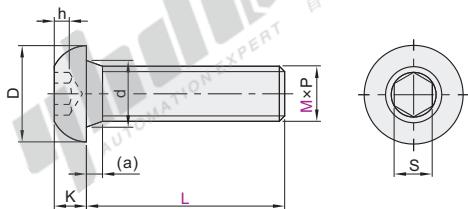

① 适用标准: ISO 7380-1-2011
JIS B 1174-2006
GB/T 70.2-2008

视角标准: 第一视角

10B21(发黑)

型号		L															P	D	K	S	h	d	a						
代码	M																螺距				(min)								
TAR01	2	4	5	6	8	10	12	16	20							0.4	3.5	1.3	1.35	0.6	2.5	0.8							
	2.5	4	5	6	8	10	12	16	20	30						0.45	4.7	1.5	1.56	0.8		0.6							
	3	4	6	8	10	12	14	16	18	20	25	30	35	40	45	50	0.5	5.7	1.65	2	1.04	3.6	1						
	4	6	8	10	12	16	20	25	30	35	40	45	50	0.7	7.6	2.2	2.5	1.3	4.7	1.4									
	5	6	8	10	12	14	16	20	25	30	35	40	45	50	0.8	9.5	2.75	3	1.56	5.7	1.6								
	6	8	10	12	14	16	20	25	30	35	40	45	50	55	60	1.0	10.5	3.3	4	2.08	6.8	2							
	8	10	12	16	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	100	1.25	14	4	5	2.6	9.2	2.5		
	10	16	20	25	30	35	40	45	50	55	60	65	70	75	80	90	100	1.5	17.5	5.5	6	3.12	11.2	3					
	12	16	20	25	30	35	40	45	50	55	60	65	70	75	80	90	100	1.75	21	6.6	8	4.16	14.2	3.5					
	16										30	35	40	45	50	55	60	65	70	75	80	90	100	2.0	28	8	10	5.2	18.2

10B21(镀镍)

型号		L															P	D	K	S	h	d	a
代码	M																螺距				(min)		
TAR04	3	6	8	10	12	16	20	25	30	35	40	45	50	0.5	5.7	1.65	2	1.04	3.6	1			
	4	6	8	10	12	14	16	18	20	25	30	35	40	0.7	7.6	2.2	2.5	1.3	4.7	1.4			
	5	6	8	10	12	14	16	20	25	30	35	40	45	0.8	9.5	2.75	3	1.56	5.7	1.6			
	6	8	10	12	16	18	20	25	30	35	40	45	50	1.0	10.5	3.3	4	2.08	6.8	2			
	8	10	12	16	20	25	30	35	40	45	50	55	60	1.25	14	4.4	5	2.6	9.2	2.5			
	10	16	20	25	30	35	40	45	50	55	60	70	80	1.5	17.5	5.5	6	3.12	11.2	3			
	12	16	20	25	30	35	40	45	50	55	60	65	70	1.75	21	6.6	8	4.16	14.2	3.5			
	16													2.0	28	8.8	10	5.2	18.2	4			

SUS304

型号																		P	D	K	S	h	d	a																	
代码	M	L																螺距				(min)																			
TAR02	2.5	3	4	5	6	8	10	12	16	18	20	25											0.45	4.7	1.5	1.5	0.8	2.5	0.6												
	3	4	6	8	10	12	14	16	18	20	25	30	35	40	45	50											0.5	5.7	1.65	2	1.04	3.6	1								
	4	6	8	10	12	14	16	18	20	25	30	35	40	45	50	55	60	65	70	75											0.7	7.6	2.2	2.5	1.3	4.7	1.4				
	5	6	8	10	12	14	16	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	100											0.8	9.5	2.75	3	1.56	5.7	1.6
	6	8	10	12	14	16	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	100											1.0	10.5	3.3	4	2.08	6.8	2	
	8	12	14	16	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	100											1.25	14	4.4	5	2.6	9.2	2.5			
	10	16	18	20	22	25	30	35	40	45	50	55	60	65	70	75	80	85	90	100											1.5	17.5	5.5	6	3.12	11.2	3				
	12	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	100											1.75	21	6.6	8	4.16	14.2	3.5							

SUS316

型号		L															P	D	K	S	h	d	a
代码	M																螺距				(min)		
TAR05	3	6	8	10	12	18	35									0.5	5.7	1.65	2	1.04	3.6	1	
	4	6	8	10	12	14	16	20	25	30	35	40	55	65	75	0.7	7.6	2.2	2.5	1.3	4.7	1.4	
	5	10	12	16	20	25	30	35	40	45	50	55	65	70	75	0.8	9.5	2.75	3	1.56	5.7	1.6	
	6	10	12	16	20	25	30	35	40	45	50					1.0	10.5	3.3	4	2.08	6.8	2	
	8	12	16	20	25	30	35	40	45	50						1.25	14	4.4	5	2.6	9.2	2.5	
	10	16	20	25	30	35	40	45	50	60	70	80				1.5	17.5	5.5	6	3.12	11.2	3	
	12							25	30	35	40						1.75	21	6.6	8	4.16	14.2	3.5

请按图示订货

型号	L									
代码	M									
TAR01	2	4	5	6	8	10	12			
	3	4	6	8	10	12				
	4	6	8	10	12					

TAR01—M4—L12

● 优惠价
数量 1~49 50~
价格 100% 另行报价
未税价(元)

交货期
5

总目录

目录

使用说明

螺钉

螺栓

螺柱

铆接类

组合件

螺母

垫圈

挡圈

树脂类

带挡块

螺钉

柱塞

紧固件

进口专区

紧固件

专用配件

经济型

轴承

标准型

轴承

进口型

轴承

品牌轴承

带座轴承

吊环

索具

电子焊接

工具

手动工具

电动工具

气动工具

储存工具

量具

刀具

技术资料